



  
LOOK  
INSIDE



# Saylite

**2022 LED LIGHTING  
BUYERS GUIDE**



Lightning-fast  
turnaround

Design to budget  
and customized  
options

100% of jobs  
from single  
USA factory

Easy-to-work  
with to fill the  
unique needs  
of the job

Make high-value, customized lighting a standard in your projects without sacrificing your budget. Select the designs and colors you need, and our team of engineers and designers will work with you to deliver customized lighting exactly the way you envision.

**Saylite is more than a lighting supplier. We're your partner in lighting.** We ship unique, value-priced fixtures across the country with lightning-fast turnaround from our single US-based factory. Don't compromise on design and performance to meet your budget. If you have a unique lighting challenge, let Saylite help you solve it.

## Table of Contents

Recessed Linear	4
Recessed	12
Linear (Pendants & Surface Mount)	17
Architectural Flair	36
Surface Mount	46
Linear Wall	53
High Bays	61
Retrofit Kits	66
Close-to-Ceiling	70
Citadel Enclosures	74
Exterior Wall Pack and Floods	80
Canopy Kits	85
Exit & Emergency	86
Savegreen Lamps	90
Reference (Options)	92
Index	95

Saylite delivers lighting solutions for businesses nationwide, featuring one of the most comprehensive LED selections in the industry. As a privately held business with a state-of-the-art facility right here in the US, we're uniquely capable of getting you just the lighting you need from a team of experts you can trust.

### The Simple Choice

We'll take the complexity out of lighting, helping you navigate challenges in a rapidly shifting marketplace.

### The Right Lighting

Commodity to custom: choose from a broad selection, or design your own at our state-of-the-art facility.

### The Best Value

Find practical lighting at any price point or have it value engineered at a fraction of the cost.


### The Shortest Leadtime

Quick turnaround, often half the time of our competition. We design and build products to hit your deadlines.

### Your Reliable Partner

People you can reach and count on, with the experience and attitude to do what's right for your business.

# Recessed Linear

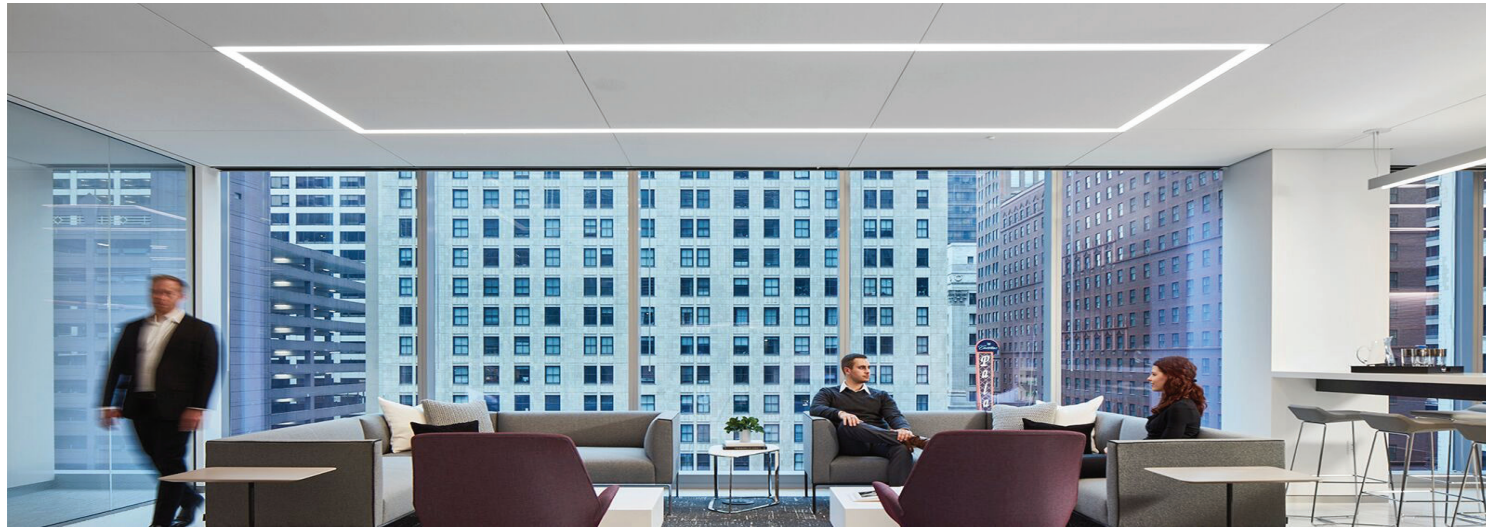

LED technology allows for maximum light output in a minimal package, perfect for modern interiors. Saylite offers LED, recessed, linear lines of light for every specification. Available for individual, continuous, or configurations, and for T-bar and Hard (flanged or flangeless) ceilings. If the design calls for a minimal profile, Saylite has the fixture.


**Specify the right Line of Light for your application with these options.**

- Type of ceiling to recess – T Bar, Hard Ceiling or Other.
- Individual, continuous or configurations (patterns).
- Width of the line of light from 1 inch to 6 inches.
- Integral driver or remote driver.




## Choose from three Recessed Mounting and Looks

**T Bar Grid Ceiling**  
Specify "R"



End is slightly shorter to accommodate the T Bar Grid.

**Hard Ceiling -  
Sheetrock Flanged Version**  
Specify "RF"



**Hard Ceiling -  
Sheetrock Flangeless Version**  
Specify "RRXXX"

Option 1: Install before sheetrock  
Option 2: Install after sheetrock  
RRPF - Perforated Flange to mud to



New Perforated Flange 1/4" below ceiling to mud to (RRPF)



T Bar  
L23R



Flangeless  
L23RRXXX

**Specify the right mounting**  
L23R - For T Bar  
L23RF - For Hard Ceiling with Flange  
L23RRXXX - For Hard Ceilings Flangeless  
See page 42 for more information.

## LED LINEAR LINES 2" X 3" FOR T BAR CEILING

This popular 2" fixture is available with a wide variety of options and is USA-manufactured to your specified length. The narrow width packs a large punch of light and allows for application specific customization in T Bar, hard deck, or specialty ceilings. Designed for direct lighting with a snap-in lens and ideal for corridors, lobbies, and office areas.

ITEM NO.	DESCRIPTION
L23RSF24LT13W1300LDMV40KWH	24"L x 2"W x 3"H Recessed Grid Ceiling / Frosted Lens / 13W, 1300L / 0-10V Dim / 4000K
L23RSF24LT22W2200LDMV40KWH	24"L x 2"W x 3"H Recessed Grid Ceiling / Frosted Lens / 22W, 2200L / 0-10V Dim / 4000K
L23RSF48LT26W2600LDMV40KWH	48"L x 2"W x 3"H Recessed Grid Ceiling / Frosted Lens / 26W, 2600L / 0-10V Dim / 4000K
L23RSF48LT38W3800LDMV40KWH	48"L x 2"W x 3"H Recessed Grid Ceiling / Frosted Lens / 38W, 3800L / 0-10V Dim / 4000K
L23RSF48LT45W4500LDMV40KWH	48"L x 2"W x 3"H Recessed Grid Ceiling / Frosted Lens / 45W, 4500L / 0-10V Dim / 4000K
L23RSF96LT52W5200LDMV40KWH	96"L x 2"W x 3"H Recessed Grid Ceiling / Frosted Lens / 52W, 5200L / 0-10V Dim / 4000K
L23RSF96LT76W7600LDMV40KWH	96"L x 2"W x 3"H Recessed Grid Ceiling / Frosted Lens / 76W, 7600L / 0-10V Dim / 4000K
L23RSF96LT90W9000LDMV40KWH	96"L x 2"W x 3"H Recessed Grid Ceiling / Frosted Lens / 90W, 9000L / 0-10V Dim / 4000K

EM3 G120 OS2 D1MV 90CRI CCT1 SURF PEND WALL

## LED LINEAR LINES 2.5" X 3" FOR T BAR OR HARD CEILINGS **NEW**

This popular 2.5" fixture is available with a wide variety of options and is USA-manufactured to your specified length. The narrow width packs a large punch of light and allows for application specific customization in a T Bar Ceiling. Designed for direct lighting with a snap-in lens and ideal for corridors, lobbies, and office areas.



**Specify the right mounting**  
L34R - For T Bar  
L34RF - For Hard Ceiling with Flange  
L34RRXXX - For Hard Ceilings Flangeless  
See page 42 for more information.

ITEM NO.	DESCRIPTION
L34RSF24LT13W1300LDMV40KWH	23.75"L x 2.5"W x 3"H Recessed Grid Ceiling / Frosted Lens / 13W, 1300L / 0-10V Dim / 4000K
L34RSF24LT22W2200LDMV40KWH	23.75"L x 2.5"W x 3"H Recessed Grid Ceiling / Frosted Lens / 22W, 2200L / 0-10V Dim / 4000K
L34RSF48LT26W2600LDMV40KWH	47.32"L x 2.5"W x 3"H Recessed Grid Ceiling / Frosted Lens / 26W, 2600L / 0-10V Dim / 4000K
L34RSF48LT38W3800LDMV40KWH	47.32"L x 2.5"W x 3"H Recessed Grid Ceiling / Frosted Lens / 38W, 3800L / 0-10V Dim / 4000K
L34RSF48LT45W4500LDMV40KWH	47.32"L x 2.5"W x 3"H Recessed Grid Ceiling / Frosted Lens / 45W, 4500L / 0-10V Dim / 4000K
L34RSF96LT52W5200LDMV40KWH	95.50"L x 2.5"W x 3"H Recessed Grid Ceiling / Frosted Lens / 52W, 5200L / 0-10V Dim / 4000K
L34RSF96LT76W7600LDMV40KWH	95.50"L x 2.5"W x 3"H Recessed Grid Ceiling / Frosted Lens / 76W, 7600L / 0-10V Dim / 4000K
L34RSF96LT90W9000LDMV40KWH	95.50"L x 2.5"W x 3"H Recessed Grid Ceiling / Frosted Lens / 90W, 9000L / 0-10V Dim / 4000K

EM6 G120 OS2 RGBW D1MV 90CRI CCT1 SURF PEND WALL

**Specify Continuous Runs**  
To specify continuous runs, identify the fixtures for the beginning ("B"), for the joiner(s) ("J") and for the end of run ("E") with these letter designations at the end of the item number. The fixtures will include the necessary electrical harnesses and mechanical accessories for the joining of multiple fixtures.

# Recessed Linear



Shown recessed fixture for T Bar / Grid ceiling.

## LED RECESSED LINEAR LINES OF LIGHT 4" X 4" FOR T BAR CEILINGS

The 44 Series provides a higher output in a fully configurable 4" fixture for individual, continuous or patterns. This steel fixture is value-engineered and manufactured in the USA. Designed for direct lighting with a snap-in lens that is specially engineered for T Bar Ceiling.

ITEM NO.	DESCRIPTION
44RSF24LR12W1200LDMV40KWH	24"L x 4"W x 4"H Recessed Grid Ceiling / Frosted Lens / 12W, 1200L / 0-10V Dim / 4000K
44RSF24LR24W2400LDMV40KWH	24"L x 4"W x 4"H Recessed Grid Ceiling / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K
44RSF48LR24W2400LDMV40KWH	48"L x 4"W x 4"H Recessed Grid Ceiling / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K
44RSF48LR48W4800LDMV40KWH	48"L x 4"W x 4"H Recessed Grid Ceiling / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K
44RSF96LR48W4800LDMV40KWH	96"L x 4"W x 4"H Recessed Grid Ceiling / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K
44RSF96LR96W9600LDMV40KWH	96"L x 4"W x 4"H Recessed Grid Ceiling / Frosted Lens / 96W, 9600L / 0-10V Dim / 4000K

EM6 G120 RGBW D1MV 90CRI CCT1 SURF PEND X1LED FLUOR



Shown "RF" recessed flange fixture.

Consult for Custom Lengths

## LED RECESSED LINEAR LINES OF LIGHT 4" X 4" FOR HARD CEILINGS

The 44 Series provides a higher output in a fully configurable 4" fixture for individual, continuous or patterns in hard ceilings (sheetrock). Choose either a flanged appearance or a flangeless mud-in. The 4" width is ideal to make a statement.



Shown with Parabolic Grid (SP1)

ITEM NO.	DESCRIPTION
44RFSF24LR12W1200LDMV40KWH	24"L x 4"W x 4"H Recessed Hard Ceiling / Frosted Lens / 12W, 1200L / 0-10V Dim / 4000K
44RFSF24LR24W2400LDMV40KWH	24"L x 4"W x 4"H Recessed Hard Ceiling / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K
44RFSF48LR24W2400LDMV40KWH	48"L x 4"W x 4"H Recessed Hard Ceiling / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K
44RFSF48LR48W4800LDMV40KWH	48"L x 4"W x 4"H Recessed Hard Ceiling / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K
44RFSF96LR48W4800LDMV40KWH	96"L x 4"W x 4"H Recessed Hard Ceiling / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K
44RFSF96LR96W9600LDMV40KWH	96"L x 4"W x 4"H Recessed Hard Ceiling / Frosted Lens / 96W, 9600L / 0-10V Dim / 4000K

EM6 G120 RGBW D1MV 90CRI CCT1 SURF PEND X1LED FLUOR

## LED LINEAR LINES OF LIGHT WALL WASH 4" X 4"


This economical 4" recessed wall wash provides an asymmetrical light distribution and is ideal for corners, offices, or lobby areas. Available with optional Snap Fit Lens.

ITEM NO.	DESCRIPTION
44RWSF24LR12W1200LDMV40KWH	24"L x 4"W x 4"H Recessed Grid Ceiling / Wall Wash / Frosted Lens / 12W, 1200L / 0-10V Dim / 4000K
44RWSF24LR24W2400LDMV40KWH	24"L x 4"W x 4"H Recessed Grid Ceiling / Wall Wash / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K
44RWSF48LR24W2400LDMV40KWH	48"L x 4"W x 4"H Recessed Grid Ceiling / Wall Wash / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K
44RWSF48LR48W4800LDMV40KWH	48"L x 4"W x 4"H Recessed Grid Ceiling / Wall Wash / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K
44RWSF96LR48W4800LDMV40KWH	96"L x 4"W x 4"H Recessed Grid Ceiling / Wall Wash / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K
44RWSF96LR96W9600LDMV40KWH	96"L x 4"W x 4"H Recessed Grid Ceiling / Wall Wash / Frosted Lens / 96W, 9600L / 0-10V Dim / 4000K

EM6 G120 OS2 D1MV 90CRI CCT1 SURF PEND



Now Available with Snap Fit Lens (SF). Shown without lens. Available in 44 and 66 series.



Specially designed reflector provides asymmetrical light distribution ideal for economical wall washing.

For T Bar or Hard Ceiling Options, See Page 4.

## LED RECESSED LINEAR LINES OF LIGHT 6" X 6" FOR T BAR OR HARD CEILINGS

Make a big, bold statement with the 66 series. This steel fixture is value-engineered and manufactured in the USA. Designed for direct lighting for individual, continuous or patterns with a snap-in lens and ideal for corridors, lobbies, and office areas.

### T Bar Ceilings

ITEM NO.	DESCRIPTION
66RSF24LR12W1200LDMV40KWH	24"L x 6"W x 6"H Recessed Grid Ceiling / Frosted Lens / 12W, 1200L / 0-10V Dim / 4000K
66RSF24LR24W2400LDMV40KWH	24"L x 6"W x 6"H Recessed Grid Ceiling / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K
66RSF48LR24W2400LDMV40KWH	48"L x 6"W x 6"H Recessed Grid Ceiling / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K
66RSF48LR48W4800LDMV40KWH	48"L x 6"W x 6"H Recessed Grid Ceiling / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K
66RSF96LR48W4800LDMV40KWH	96"L x 6"W x 6"H Recessed Grid Ceiling / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K
66RSF96LR96W9600LDMV40KWH	96"L x 6"W x 6"H Recessed Grid Ceiling / Frosted Lens / 96W, 9600L / 0-10V Dim / 4000K

### Hard Ceiling

ITEM NO.	DESCRIPTION
66RFSF24LR12W1200LDMV40KWH	24"L x 6"W x 6"H Recessed Hard Ceiling / Frosted Lens / 12W, 1200L / 0-10V Dim / 4000K
66RFSF24LR24W2400LDMV40KWH	24"L x 6"W x 6"H Recessed Hard Ceiling / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K
66RFSF48LR24W2400LDMV40KWH	48"L x 6"W x 6"H Recessed Hard Ceiling / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K
66RFSF48LR48W4800LDMV40KWH	48"L x 6"W x 6"H Recessed Hard Ceiling / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K
66RFSF96LR48W4800LDMV40KWH	96"L x 6"W x 6"H Recessed Hard Ceiling / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K
66RFSF96LR96W9600LDMV40KWH	96"L x 6"W x 6"H Recessed Hard Ceiling / Frosted Lens / 96W, 9600L / 0-10V Dim / 4000K

EM6 G120 RGBW D1MV 90CRI CCT1 SURF PEND WALL X1LED FLUOR



For Flangeless use 44RRPF. See page 4 for more information.

## LED LINEAR LINES OF LIGHT WALL WASH 6" X 6"

This economical 6" recessed wall wash provides an asymmetrical light distribution and is ideal for corners, offices, or lobby areas. Available with optional Snap Fit Lens.

ITEM NO.	DESCRIPTION
66RWSF24LR12W1200LDMV40KWH	24"L x 6"W x 6"H Recessed Grid Ceiling / Wall Wash / Frosted Lens / 12W, 1200L / 0-10V Dim / 4000K
66RWSF24LR24W2400LDMV40KWH	24"L x 6"W x 6"H Recessed Grid Ceiling / Wall Wash / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K
66RWSF48LR24W2400LDMV40KWH	48"L x 6"W x 6"H Recessed Grid Ceiling / Wall Wash / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K
66RWSF48LR48W4800LDMV40KWH	48"L x 6"W x 6"H Recessed Grid Ceiling / Wall Wash / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K
66RWSF96LR48W4800LDMV40KWH	96"L x 6"W x 6"H Recessed Grid Ceiling / Wall Wash / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K
66RWSF96LR96W9600LDMV40KWH	96"L x 6"W x 6"H Recessed Grid Ceiling / Wall Wash / Frosted Lens / 96W, 9600L / 0-10V Dim / 4000K

EM6 G120 OS2 D1MV 90CRI CCT1 SURF PEND



Shown without lens.

For T Bar or Hard Ceiling Options, See Page 4.

# Recessed Linear

## LED RECESSED LINEAR LINES OF LIGHT 1.5" FOR HARD CEILINGS (SHEETROCK ONLY)

This elegant 1.5" extruded aluminum lighting channel blends seamlessly into hard ceilings. Upgrade from the tired look of round downlights in typical sheetrock applications for general lighting. The new CLF series allows for exciting new looks with a 1.5" line of light. Choose white flange or flangeless (mud-in flange available) in multiple sizes to create infinite configurations. Value-engineered for easy installation.


### Flangeless

ITEM NO.	DESCRIPTION
CLFRRKITDMV30KSA	Recessed Flangeless 3 Piece Set (36.4", 24.4" & 12.4")L x 1.48"W x 2.6"H with Frosted Lens, 45W (total), 4200 Lumens (total), Multi-Volt 0-10V Dimming, 3000K, Satin Aluminum
CLFR48L30W2800LDMV30KSA	Recessed Flangeless Fixture 48.4"L x 1.48"W x 2.6"H with Frosted Lens, 30W, 2800 Lumens, Multi-Volt 0-10V Dimming, 3000K, Satin Aluminum
CLFR96L60W5600LDMV30KSA	Recessed Flangeless Fixture 96.4"L x 1.48"W x 2.6"H with Frosted Lens, 60W, 5600 Lumens, Multi-Volt 0-10V Dimming, 3000K, Satin Aluminum

### Flanged

ITEM NO.	DESCRIPTION
CLFRFKITDMV30KSA	Recessed Flanged 3 Piece Set 3.2"W x 1.4"H [38.1", 26.1" & 14.1" lengths] w/First 1.5"W Lens, 45W (total), 4200 Lumens (total), Multi-Volt 0-10V Dimming, 3000K, Satin Aluminum
CLFR48L30W2800LDMV30KSA	Recessed Flanged Fixture 50.0"L x 3.2"W x 1.4"H w/First 1.5"W Lens, 30W, 2800 Lumens, Multi-Volt 0-10V Dimming, 3000K, Satin Aluminum
CLFR96L60W5600LDMV30KSA	Recessed Flanged Fixture 99.1"L x 3.2"W x 1.4"H Extrusion w/First 1.5"W Lens, 60W, 5600 Lumens, Multi-Volt 0-10V Dimming, 3000K, Satin Aluminum

EM3 CCT4

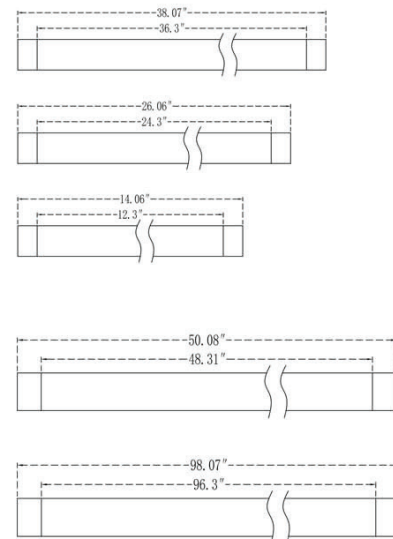

## Flangeless Appearance

A popular look with a sleek appearance. Fixture comes with mud-in flange.



# Perimeter Lighting



Specify the depth of drop shield in the item number.



## LED PERIMETER COVE LIGHTING SYSTEM

The PRL is a cost-effective solution where cove lighting is desired. Create an elegant wash of ambient and vertical illumination between the wall and ceiling planes in offices, hallways, conference rooms, and medical facilities. Available in 2, 4, 6 or 8 foot sections along with telescoping and corner options that can all be combined for longer runs and 4" regressed optics. This Perimeter Lighting System eliminates the need for a more costly "built-in-place" solution.

ITEM NO.	DESCRIPTION
PRLW44RFSF24LR16W1600LDMV40K	4"W x 24"L x 4"H / 16W, 1600L/Frost Lens / 0-10V Dim / 4000K / White
PRLW44RFSF48LR32W3200LDMV40K	4"W x 48"L x 4"H / 32W, 3200L / Frost Lens/ 0-10V Dim / 4000K / White
PRLW44RFSF72LR48W4800LDMV40K	4"W x 72"L x 4"H / 48W, 4800L / Frost Lens/ 0-10V Dim / 4000K / White
PRLW44RFSF96LR64W6400LDMV40K	4"W x 96"L x 4"H / 64W, 6400L / Frost Lens/ 0-10V Dim / 4000K / White
PRLW46RFSF24LR16W1600LDMV40K	4"W x 24"L x 6"H / 16W, 1600L / Frost Lens/ 0-10V Dim / 4000K / White
PRLW46RFSF48LR32W3200LDMV40K	4"W x 48"L x 6"H / 32W, 3200L / Frost Lens/ 0-10V Dim / 4000K / White
PRLW46RFSF72LR48W4800LDMV40K	4"W x 72"L x 6"H / 48W, 4800L / Frost Lens / 0-10V Dim / 4000K / White
PRLW46RFSF96LR64W6400LDMV40K	4"W x 96"L x 6"H / 64W, 6400L / Frost Lens/ 0-10V Dim / 4000K / White

EM3 G120 RGBW D1MV 90CRI CCT1



Telescoping Version for Wall to Wall Application. Consult to Specify.

**2.5 RECESSED LINEAR (FLANGED FOR HARD CEILING)**



ITEM NO.	DESCRIPTION
SES25RFSF117X1WHLN15W40K	4"x24" 1700 Lumen Recessed 2.5" Flanged 1x15W LED T8 4000K Lamps Included
SES25RFSF132X1WHLN18W40K	4"x48" 2100 Lumen Recessed 2.5" Flanged 1x18W LED T8 4000K Lamps Included
SES25RFSF1328X1WHLN18W40K	4"x96" 4200 Lumen Recessed 2.5" Flanged 2x18W LED T8 4000K Lamps Included

EM8 OS5 CCT2 SURF PEND WALL LED FLUOR X1LEDT8D

Change SES25RFSF to 44R for Recessed TBAR or SES25RRXX for Recessed Flangeless for XX" sheetrock depth.

**6X6 RECESSED LINEAR (FOR T-BAR CEILING)**



ITEM NO.	DESCRIPTION
66RMW117X1WHLN15W40K	6" x 26" 1700 Lumen Recessed TBAR 1x 15W LED T8 4000K Lamps Included
66RMW217X1WHLN15W40K	6" x 26" 3400 Lumen Recessed TBAR 2x 15W LED T8 4000K Lamps Included
66RMW132X1WHLN18W40K	6" x 48" 2100 Lumen Recessed TBAR 1x 18W LED T8 4000K Lamps Included
66RMW232X1WHLN18W40K	6" x 48" 4200 Lumen Recessed TBAR 2x 18W LED T8 4000K Lamps Included
66RMW1328X1WHLN18W40K	6" x 96" 4200 Lumen Recessed TBAR 2x 18W LED T8 4000K Lamps Included
66RMW2328X1WHLN18W40K	6" x 96" 8400 Lumen Recessed TBAR 4x 18W LED T8 4000K Lamps Included

EM8 OS5 CCT2 SURF PEND WALL LED FLUOR X1LEDT8D

Change 66R to 66RF for Recessed Flanged or 66RRXX for Recessed Flangeless for XX" sheetrock depth. For Baffled Louver, change MW to BL and add \$10 per 4FT.

**4X4 RECESSED LINEAR (FOR T-BAR CEILING)**



Special red sockets to identify fixtures made for LED T8 lamps.

ITEM NO.	DESCRIPTION
44RSF117X1WHLN15W40K	4" x 24" 1700 Lumen Recessed TBAR 1x 15W LED T8 4000K Lamps Included
44RSF217X1WHLN15W40K	4" x 24" 3400 Lumen Recessed TBAR 2x 15W LED T8 4000K Lamps Included
44RSF132X1WHLN18W40K	4" x 48" 2100 Lumen Recessed TBAR 1x 18W LED T8 4000K Lamps Included
44RSF232X1WHLN18W40K	4" x 48" 4200 Lumen Recessed TBAR 2x 18W LED T8 4000K Lamps Included
44RSF1328X1WHLN18W40K	4" x 96" 4200 Lumen Recessed TBAR 2x 18W LED T8 4000K Lamps Included
44RSF2328X1WHLN18W40K	4" x 96" 8400 Lumen Recessed TBAR 4x 18W LED T8 4000K Lamps Included

EM8 OS5 CCT2 SURF PEND WALL LED FLUOR X1LEDT8D

Change SF (Snap Fit Frosted Lens) to MW for Matte White Regressed Lens  
Change 44R to 44RF for Recessed Flanged or 44RRXX for Recessed Flangeless for XX" sheetrock depth. For Baffled Louver, change MW to BL.

**Add Drama and Personality to Your Space**



Whether you want to accentuate the architecture, provide wayfinding, create visual interest or make your space stand out, Saylite's L23 series as well as others can be configured in patterns. Custom sizes, angles and configurations are available and manufactured in our USA factory. Contact your local sales representative or [sales@saylite.com](mailto:sales@saylite.com) for help with your project.

# Recessed



Surface mount any recessed by adding "SH" to prefix.



## LED CENTER BASKET

This spec-grade, low-profile, linear-ribbed, center basket (lensed) fixture is designed to maximize efficiency and minimize LED glare, creating a soft "sky light" appearance for modern spaces. Full family of sizes and lumen options available.

ITEM NO.	DESCRIPTION
UCLL22LY20WDMV40K	2x2 / 20W, 2700L / 0-10V Dim / 4000K
UCLL22LY25WDMV40K	2x2 / 25W, 3325L / 0-10V Dim / 4000K
UCLL22LY33WDMV40K	2x2 / 33W, 4275L / 0-10V Dim / 4000K
UCLL14LY20WDMV40K	1x4 / 20W, 2800L / 0-10V Dim / 4000K
UCLL14LY33WDMV40K	1x4 / 33W, 4550L / 0-10V Dim / 4000K
UCLL24LY25WDMV40K	2x4 / 25W, 4350L / 0-10V Dim / 4000K
UCLL24LY40WDMV40K	2x4 / 40W, 5950L / 0-10V Dim / 4000K
UCLL24LY54WDMV40K	2x4 / 54W, 7700L / 0-10V Dim / 4000K

EM4 G120 OS1 D1MV 90CRI CCT1 SURF X1LED FLUOR

Consult for 1x1 and 1x2. For perforated basket change LL to PF. See specification sheet for more DLC item options.

## LED VOLUMETRIC CENTER BASKET

A value-priced, spec-grade, center basket (frosted smooth lens) fixture with a volumetric distribution to create even illumination from floor to ceiling, while still providing a soft "sky light" appearance. Ideal for modern offices with recessed configurations, where value is a priority.

ITEM NO.	DESCRIPTION
CBF22LY20WDMV40K	2x2 / 20W, 2700L / 0-10V Dim / 4000K
CBF22LY25WDMV40K	2x2 / 25W, 3325L / 0-10V Dim / 4000K
CBF22LY33WDMV40K	2x2 / 33W, 4275L / 0-10V Dim / 4000K
CBF14LY25WDMV40K	1x4 / 25W, 3350L / 0-10V Dim / 4000K
CBF14LY33WDMV40K	1x4 / 33W, 4350L / 0-10V Dim / 4000K
CBF24LY35WDMV40K	2x4 / 35W, 5100L / 0-10V Dim / 4000K
CBF24LY45WDMV40K	2x4 / 45W, 6350L / 0-10V Dim / 4000K
CBF24LY54WDMV40K	2x4 / 54W, 7400L / 0-10V Dim / 4000K

EM2 G120 OS1 D1MV 90CRI CCT1 SURF

See specification sheet for more DLC item options.

## CENTER BASKET

ITEM NO.	DESCRIPTION
CLT22L30M3300LDMVMCT	2x2 20/30/40W & 30/35/40K 2200 / 3300 / 4400LM
CLT24L40M4400LDMVMCT	2x4 30/40/50W & 30/35/40K 3300 / 4400 / 5500LM

EM2 G120 D1MV 90CRI CCT1 SURF

For XLED version, see page 16.

### Options to Make It "Your Way"

EM1 SURF X1LED

The icons listed under every series identifies all of the options available for that series, including color temperatures, emergencies, sensors/controls, coordinating applications and more. See pages 194 and 195 for full explanations of each icon.



## THE CURVE

This innovative design is both visually appealing in the ceiling and provides soft, abundant lighting. Grouped together in an office or circulation space, they provide an upscale look to the Flat Panel.

ITEM NO.	DESCRIPTION
CURFR22LP36M4000MDMVMCT	Curved Lensed 2x2 20/27/36/45 Watts & 2200/2970/3980/4950 Lumens, 30/35/40K
CURFR24LP44M4840MDMVMCT	Curved Lensed 2x4 25/33/44/55 Watts & 2750/3630/4840/6050 Lumens, 30/35/40K

## LED DUAL BASKET

This low-profile, dual-basket (linear ribbed lenses) fixture offers an ever-pleasing aesthetic and is designed to maximize efficiency and minimize LED glare, creating a soft "sky light" appearance for modern spaces. Dual baskets yield a slightly wider distribution.

ITEM NO.	DESCRIPTION
UDLL22LY28W3200LDMV40K	2x2 / 28W, 3200L / 0-10V Dim / 4000K
UDLL22LY35W4200LDMV40K	2x2 / 35W, 4200L / 0-10V Dim / 4000K
UDLL24LY48W6000LDMV40K	2x4 / 48W, 6000L / 0-10V Dim / 4000K
UDLL24LY57W7100LDMV40K	2x4 / 57W, 7100L / 0-10V Dim / 4000K

EM5 G120 OS1 D1MV 90CRI CCT1 SURF X1LED FLUOR

For perforated basket change LL to PF.

## LED LENSED TROFFER

This spec-grade, low-profile, best seller offers almost unlimited options including four color temperatures, ten diffuser options, and three size configurations. Post-painted powder-coated finish, perfect for all general illumination applications.

ITEM NO.	DESCRIPTION
131A22LY20WDMV40K	2x2 / 20W, 2700L / 0-10V Dim / 4000K
131A22LY25WDMV40K	2x2 / 25W, 3300L / 0-10V Dim / 4000K
131A22LY33WDMV40K	2x2 / 33W, 4250L / 0-10V Dim / 4000K
131A14LY30WDMV40K	1x4 / 30W, 4350L / 0-10V Dim / 4000K
131A14LY45WDMV40K	1x4 / 45W, 6100L / 0-10V Dim / 4000K
131A24LY30WDMV40K	2x4 / 30W, 4750L / 0-10V Dim / 4000K
131A24LY35WDMV40K	2x4 / 35W, 5400L / 0-10V Dim / 4000K
131A24LY45WDMV40K	2x4 / 45W, 6750L / 0-10V Dim / 4000K
131A24LY54WDMV40K	2x4 / 54W, 7700L / 0-10V Dim / 4000K
131A24LY95W12000LDMV40K	2x4 / 95W, 12000L / 0-10V Dim / 4000K

EM7 G120 OS1 D1MV 90CRI CCT1 AIR RET SURF X1LED FLUOR

Change lens to Frosted (FR). Add "R" after 131A for Air Return. See specification sheet for more DLC item options.

# Recessed



## LED BACK LIT FLAT PANEL **NEW**

The popular Flat Panel is now available in a back lit version that maintains the appearance, shallow depth and great value of the Edge Lit but utilizes a longer life diffuser. Available in multiple sizes and color temperatures.

ITEM NO.	DESCRIPTION
BFP14L30M3300LDMVMCT	BACKLIT PANEL 1X4 30/40/50W & 35/40/50K
BFP22L30M3300LDMVMCT	BACKLIT PANEL 2X2 30/40/50W & 35/40/50K
BFP24L40M4400LDMVMCT	BACKLIT PANEL 2X4 30/40/50W & 35/40/50K

EM3 CCT2 SURF


## LED RECESSED SKY BOX – EDGE-LIT FLAT PANEL WITH INNOVATIVE SHROUD

This slim, elegant, sky box with its unobtrusive white shroud offers a refined skylight appearance at a value-engineered price with standard Flat Panel. Available in 1x4, 2X2 and 2X4 configurations, and in multiple color temperatures with 0 to 10 Volt dimming.



ITEM NO.	DESCRIPTION
SBX22LED40DMVWH40	SBX 2x2 LED 40W DMV WH 40K
SBX14LED40DMVWH40	SBX 1x4 LED 40W DMV WH 40K
SBX24LED50DMVWH40	SBX 2x4 LED 50W DMV WH 40K

EM3 CCT2 SURF

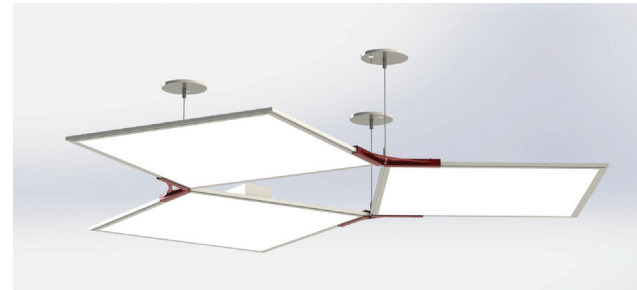


Consult Factory for Pendant Mount Flat Panel Configurations FPHK Series.

### SKYBOX ACCESSORY




Transform any LED Edge-Lit Flat Panel (ours, or by others) into a specification-grade fixture with the addition of this sleek shroud. Specify a custom color to add visual interest or to support corporate branding.

ITEM NO.	DESCRIPTION
SBX22	SKY BOX (SBX) SHROUD FOR 2x2 FLAT PANEL
SBX14	SKY BOX (SBX) SHROUD FOR 1x4 FLAT PANEL
SBX24	SKY BOX (SBX) SHROUD FOR 2x4 FLAT PANEL

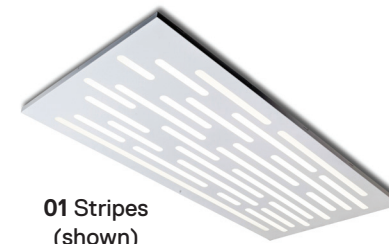


01 Stripes (shown)

Surface Mount by adding "SH" to the item number.

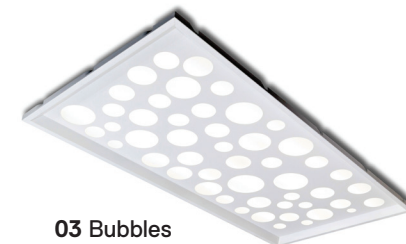

03 Bubbles (shown)

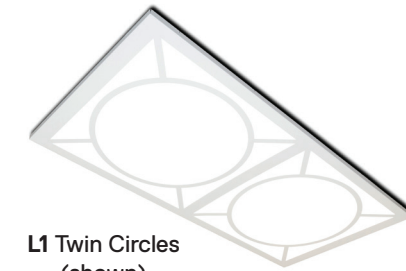

L1 Twin Circles (shown)

## LASER PANELS-ELEMENTS

Create and experience by adding decorative elements to your ceiling. Laser Panel Elements add style while softening the light. Ideal for circulation spaces, gathering places, and other non-task oriented areas.

ITEM NO.	DESCRIPTION
ICFFR22L30MDMVWHMCT-01*	2X2 / 20, 30, 40W / 35, 40, 50 K/STRIPES
ICFFR24L40MDMVWHMCT-01*	2X4 / 30, 40, 50W / 35, 40, 50 K/STRIPES
ICFFR14L30MDMVWHMCT-01*	1X4 / 20, 30, 40W / 35, 40, 50 K/STRIPES

EM2 OS2 90CRI CCT1 WALL SURF

\*Choose from a variety of styles below.  
 \*\* Surface Mount any Laser Panel by adding "SH" to prefix and add \$40 to 2x2 or 1x4. Add \$50 for 2x4.  
 \*\*\* Replace the number 01 with the code of the preferred pattern. For eg; For squares use code 02 instead of 01.  
 \*\*\* To specify Laser Panel Only, shorten item number to ICFFR22LWH-01 for 2x2.

## ELEMENTS-REGRESSED

Add an element of sophistication to your architecture and see what lighting can do for you. Elements- Regressed is built to give your space a refined look and provide sophisticated lighting.

ITEM NO.	DESCRIPTION
ICFFR22L30MDMVWHMCT-R01*	2X2 / 20, 30, 40W / 35, 40, 50 K/STRIPES
ICFFR24L40MDMVWHMCT-R01*	2X4 / 30, 40, 50W / 35, 40, 50 K/STRIPES
ICFFR14L30MDMVWHMCT-R01*	1X4 / 20, 30, 40W / 35, 40, 50 K/STRIPES

EM2 OS2 90CRI CCT1

\*Choose from a variety of styles below.

## LASER PANELS-BRILLIANCE

Brilliance provides an enhanced style to make a statement without impacting the ceiling brightness that makes Flat Panels so popular for offices, retail spaces, and task oriented applications.


ITEM NO.	DESCRIPTION
ICFFR22L30MDMVWHMCT-L1*	2X2 / 20, 30, 40W / 35, 40, 50 K/TWIN CIRCLES
ICFFR24L40MDMVWHMCT-L1*	2X4 / 30, 40, 50W / 35, 40, 50 K/TWIN CIRCLES
ICFFR14L30MDMVWHMCT-L1*	1X4 / 20, 30, 40W / 35, 40, 50 K/TWIN CIRCLES

EM2 OS2 90CRI CCT1 WALL SURF

\*Available in multiple patterns. See below.  
 \*\* Surface Mount any Laser Panel by adding "SH" to prefix and add \$40 to 2x2 or 1x4.  
 \*\*\* To specify Laser Panel Only, shorten item number to ICFFR22LWH-L1 for 2x2.

### Also available in:

#### ELEMENT

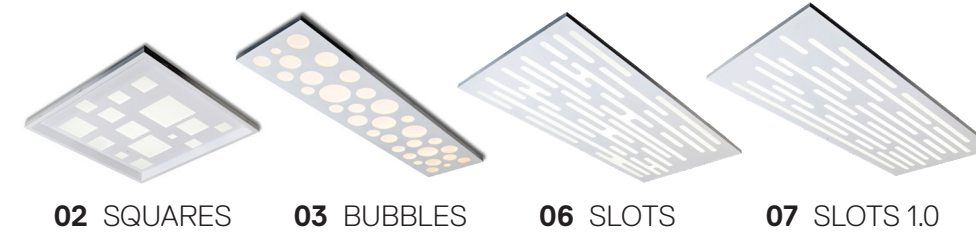

02 SQUARES 03 BUBBLES 06 SLOTS 07 SLOTS 1.0

For Regressed, add "R" after the style number.

#### BRILLIANCE



L2 Twin Squares

# Dress Up Flat Panels




## CENTER BASKET



ITEM NO.	DESCRIPTION
UCPF23212X1LN18W40	1x4 4200 Lumen Center Basket w/2x18W LED T8 4000K Lamps Included
UCPF217X1LN15W40	2x2 3400 Lumen Center Basket w/2x15W LED T8 4000K Lamps Included
UCPF317X1LN15W40	2x2 5100 Lumen Center Basket w/3x15W LED T8 4000K Lamps Included
UCPF232X1LN18W40	2x4 4200 Lumen Center Basket w/2x18W LED T8 4000K Lamps Included
UCPF332X1LN18W40	2x4 6300 Lumen Center Basket w/3x18W LED T8 4000K Lamps Included

EM8 OS5 CCT2 SURF AIR RET LED FLUOR X1LEDT8D

Change PF to LL for Linear Ribbed Lens.  
To surface mount add SH to the prefix of the item and add \$35 for 1x4 and 2x2 and \$45 for 2x4.

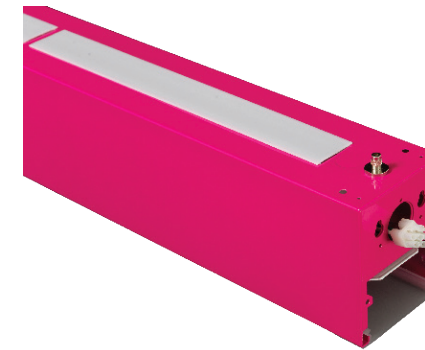

Saylite offers a wide range of linear pendant LED fixtures in all the most popular profiles, from Flat Panels to geometric rectangles, to clouds, with many also available as companion recessed or surface mounted. We offer the most competitive lead times and custom capabilities in the industry. Steel fixtures are manufactured in our USA factory allowing for custom capabilities, faster lead times and cost-effective solutions.

## DUAL BASKET



ITEM NO.	DESCRIPTION
UDPF217X1LN15W40	2x2 3400 Lumen Troffer w/2x15W LED T8 4000K Lamps Included
UDPF232X1LN18W40	2x4 4200 Lumen Dual Basket w/2x18W LED T8 4000K Lamps Included

EM8 OS5 CCT2 SURF LED FLUOR X1LEDT8D

Change PF to LL for Linear Ribbed Lens

## TROFFER



ITEM NO.	DESCRIPTION
131A23212X1LN18W40	1x4 4200 Lumen Troffer w/2x18W LED T8 4000K Lamps included
131A217X1LN15W40	2x2 3400 Lumen Troffer w/2x15W LED T8 4000K Lamps included
131A317X1LN15W40	2x2 5100 Lumen Troffer w/3x15W LED T8 4000K Lamps included
131A417X1LN15W40	2x2 6800 Lumen Troffer w/4x15W LED T8 4000K Lamps included
131A232X1LN18W40	2x4 4200 Lumen Troffer w/2x18W LED T8 4000K Lamps included
131A332X1LN18W40	2x4 6300 Lumen Troffer w/3x18W LED T8 4000K Lamps included
131A432X1LN18W40	2x4 8400 Lumen Troffer w/4x18W LED T8 4000K Lamps included

EM8 OS5 CCT2 SURF AIR RET LED FLUOR X1LEDT8D



Saylite offers a complete palette of linear pendant channel fixtures for every project, in 0.7, 1.3, 2, 2.5, 4, and 6" widths, individual or continuous run, direct/indirect, and direct only, and available in pendant, surface or wall mount. Still don't see exactly what you want? Please ask us. We design and build to specification every day. Saylite is your factory at your fingertips!

### LED LINEAR PENDANT 2" X 3" DIRECT OR INDIRECT ONLY

Our signature micro pendant (2" wide, Direct or Indirect only) is suitable for modern corridors, lobbies and offices and can be installed individually or in continuous run. Snap-in lens hides LED arrays and provides excellent glare control. Consult for custom sizes or configured in patterns.

ITEM NO.	DESCRIPTION
L23PSF24LT13W1300LDMV40KWHHC605WH	24"L x 2"W x 3"H / Frosted Lens / 13W, 1300L / 0-10V Dim / 4000K / White / 6ft WH Canopy Kit with 5 Wire Cord
L23PSF24LT19W1900LDMV40KWHHC605WH	24"L x 2"W x 3"H / Frosted Lens / 19W, 1900L / 0-10V Dim / 4000K / White / 6ft WH Canopy Kit with 5 Wire Cord
L23PSF48LT26W2600LDMV40KWHHC605WH	48"L x 2"W x 3"H / Frosted Lens / 26W, 2600L / 0-10V Dim / 4000K / White / 6ft WH Canopy Kit with 5 Wire Cord
L23PSF48LT38W3800LDMV40KWHHC605WH	48"L x 2"W x 3"H / Frosted Lens / 38W, 3800L / 0-10V Dim / 4000K / White / 6ft WH Canopy Kit with 5 Wire Cord
L23PSF48LT45W4500LDMV40KWHHC605WH	48"L x 2"W x 3"H / Frosted Lens / 45W, 4500L / 0-10V Dim / 4000K / White / 6ft WH Canopy Kit with 5 Wire Cord
L23PSF96LT52W5200LDMV40KWHHC605WH	96"L x 2"W x 3"H / Frosted Lens / 52W, 5200L / 0-10V Dim / 4000K / White / 6ft WH Canopy Kit with 5 Wire Cord
L23PSF96LT76W7600LDMV40KWHHC605WH	96"L x 2"W x 3"H / Frosted Lens / 76W, 7600L / 0-10V Dim / 4000K / White / 6ft WH Canopy Kit with 5 Wire Cord
L23PSF96LT90W9000LDMV40KWHHC605WH	96"L x 2"W x 3"H / Frosted Lens / 90W, 9000L / 0-10V Dim / 4000K / White / 6ft WH Canopy Kit with 5 Wire Cord

EM3 G120 OS2 D1MV 90CRI CCT1 SURF REC WALL



Ordering is for Direct lighting. For Indirect Lighting Add U after the "L" after the length. To surface mount, remove HC605WH.

### LED LINEAR PENDANT 2" X 3" DIRECT & INDIRECT

Our signature micro pendant (2" wide, Uplight and Downlight) is suitable for modern corridors, lobbies and offices and can be installed individually or in continuous run. Snap-in lens hides LED arrays and provides excellent glare control.

ITEM NO.	DESCRIPTION
L23PSF24LUV6WDT12WDMV40KWHHC605WH	24"L x 2"W x 3"H / Frosted Lens / Up 6W, Dn 12, 1800L / 0-10V Dim / 4000K / White / 6ft WH Canopy Kit with 5 Wire Cord
L23PSF24LUV9WDT18WDMV40KWHHC605WH	24"L x 2"W x 3"H / Frosted Lens / Up 9W, Dn 18, 2700L / 0-10V Dim / 4000K / White / 6ft WH Canopy Kit with 5 Wire Cord
L23PSF48LUV12WDT24WDMV40KWHHC605WH	48"L x 2"W x 3"H / Frosted Lens / Up 12W, Dn 24, 3600L / 0-10V Dim / 4000K / White / 6ft WH Canopy Kit with 5 Wire Cord
L23PSF48LUV18WDT36WDMV40KWHHC605WH	48"L x 2"W x 3"H / Frosted Lens / Up 18W, Dn 36W, 5400L / 0-10V Dim / 4000K / White / 6ft WH Canopy Kit with 5 Wire Cord
L23PSF96LUV24WDT48WDMV40KWHHC605WH	96"L x 2"W x 3"H / Frosted Lens / Up 24W, Dn 48W, 7200L / 0-10V Dim / 4000K / White / 6ft WH Canopy Kit with 5 Wire Cord
L23PSF96LUV36WDT72WDMV40KWHHC605WH	96"L x 2"W x 3"H / Frosted Lens / Up 36W, Dn 72W, 10800L / 0-10V Dim / 4000K / White / 6ft WH Canopy Kit with 5 Wire Cord

EM6 G120 D1MV 90CRI CCT1 SURF REC WALL

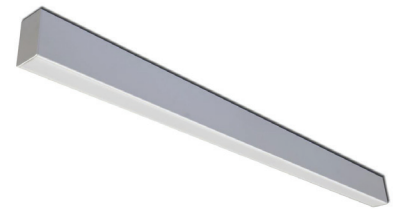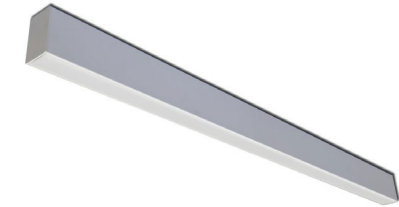

Ordering is for Direct lighting. For Indirect Lighting Add U after the "L" after the length. To surface mount, remove.



Ordering is for Direct lighting. For Indirect Lighting Add "U" after the "L." To surface mount, remove HC3015WWH.

### LED LINEAR PENDANT 2.5" X 3.5" DIRECT OR INDIRECT

This fixture series delivers maximum light output in a narrow body and it is the smallest fixture that accepts an integral emergency. Our US factory can fabricate this fixture to your exact specifications – length, finish, output, and configuration. For individual or continuous run. Consult for direct/indirect combination.

ITEM NO.	DESCRIPTION
L34PSF24LT22W2200LDMV40KWHHC3015WWH	24"L x 2.5"W x 3.25"H / Frosted Lens / 22W, 2200L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
L34PSF48LT26W2600LDMV40KWHHC3015WWH	48"L x 2.5"W x 3.25"H / Frosted Lens / 26W, 2600L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
L34PSF48LT45W4500LDMV40KWHHC3015WWH	48"L x 2.5"W x 3.25"H / Frosted Lens / 45W, 4500L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
L34PSF96LT52W5200LDMV40KWHHC3015WWH	96"L x 2.5"W x 3.25"H / Frosted Lens / 52W, 5200L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
L34PSF96LT90W9000LDMV40KWHHC3015WWH	96"L x 2.5"W x 3.25"H / Frosted Lens / 90W, 9000L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord

EM6 G120 OS2 RGBW D1MV 90CRI CCT1 SURF REC WALL

### LED LINEAR PENDANT 4" X 4" DIRECT OR INDIRECT ONLY

The 4" x 4" steel profile provides a bold architectural look used individually or in continuous lengths to provide comfortable, bright general lighting. Snap fit frosted lens hides the LED arrays and provides excellent glare control. Easy to join, and easy to install. Available in standard sizes, outputs and finishes with a vast array of custom options.

ITEM NO.	DESCRIPTION
44PSF24LR24W2400LDMV40KWH-HC3015WWH	24"L x 4"W x 4"H / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
44PSF48LR24W2400LDMV40KWH-HC3015WWH	48"L x 4"W x 4"H / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
44PSF48LR48W4800LDMV40KWH-HC3015WWH	48"L x 4"W x 4"H / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
44PSF96LR48W4800LDMV40KWH-HC3015WWH	96"L x 4"W x 4"H / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
44PSF96LR96W9600LDMV40KWH-HC3015WWH	96"L x 4"W x 4"H / Frosted Lens / 96W, 9600L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord

EM6 G120 OS2 RGBW D1MV 90CRI CCT1 SURF REC WALL X1LED FLUOR

### LED LINEAR PENDANT 4" X 5" UPLIGHT AND DOWNLIGHT

Designed for distinctive architectural lighting plans, this linear 4" X 5" pendant (direct and indirect) can be installed individually or in group patterns. The snap fit lens provides excellent lighting and the five inch height makes a bold statement.

ITEM NO.	DESCRIPTION
45PSF24LUR9WD18WDMV40KWH-HC3015WWH	24"L x 4"W x 5"H / Frosted Lens / Up 9W, Dn 18W, 2700L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
45PSF48LUR12WD24WDMV40KWH-HC3015WWH	48"L x 4"W x 5"H / Frosted Lens / Up 12W, Dn 24, 3600L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
45PSF48LUR18WD36WDMV40KWH-HC3015WWH	48"L x 4"W x 5"H / Frosted Lens / Up 18W, Dn 36W, 5400L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
45PSF96LUR24WD48WDMV40KWH-HC3015WWH	96"L x 4"W x 5"H / Frosted Lens / Up 24W, Dn 48W, 7200L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
45PSF96LUR36WD72WDMV40KWH-HC3015WWH	96"L x 4"W x 5"H / Frosted Lens / Up 36W, Dn 72W, 10800L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord

EM6 G120 OS2 RGBW WALL X1LED FLUOR

Ordering is for Direct lighting. For Indirect Lighting Add "U" after the "L." For size 4"W x 4"H, change 45 to 44.

# Linear

(Pendant & Surface Mount)



## LED LINEAR PENDANT 6" X 6" DIRECT OR INDIRECT ONLY

This spec-grade geometric (6" X 6" Direct or Indirect only) fixture is ideal for general or perimeter lighting applications where a bolder size is required and can be installed individually or in group patterns.

ITEM NO.	DESCRIPTION
66PSF24LR12W1200LDMV40KWH-HC3015WWH	24"L x 6"W x 6"H / Frosted Lens / 12W, 1200L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
66PSF24LR24W2400LDMV40KWH-HC3015WWH	24"L x 6"W x 6"H / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
66PSF48LR24W2400LDMV40KWH-HC3015WWH	48"L x 6"W x 6"H / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
66PSF48LR48W4800LDMV40KWH-HC3015WWH	48"L x 6"W x 6"H / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
66PSF96LR48W4800LDMV40KWH-HC3015WWH	96"L x 6"W x 6"H / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
66PSF96LR96W9600LDMV40KWH-HC3015WWH	96"L x 6"W x 6"H / Frosted Lens / 96W, 9600L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord

EM6 G120 OS2 RGBW D1MV 90CRI CCT1 SURF REC WALL X1LED FLUOR

Ordering is for Direct lighting. For Indirect Lighting Add "U" after the "L."  
To surface mount, remove HC3015WWH.


## LED LINEAR PENDANT 6" X 6" DIRECT AND INDIRECT

This spec-grade geometric (6" X 6" Uplight and Downlight) fixture is ideal for general or perimeter lighting applications where a bolder size is required and can be installed individually or in group patterns.

ITEM NO.	DESCRIPTION
66PSF24LUR6WD12WDMV40KWH-HC3015WWH	24"L x 6"W x 6"H / Frosted Lens / Up 6W, Dn 12W, 1800L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
66PSF24LUR12WD24WDMV40KWH-HC3015WWH	24"L x 6"W x 6"H / Frosted Lens / Up 12W, Dn 24W, 3600L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
66PSF48LUR12WD24WDMV40KWH-HC3015WWH	48"L x 6"W x 6"H / Frosted Lens / Up 12W, Dn 24W, 3600L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
66PSF48LUR24WD48WDMV40KWH-HC3015WWH	48"L x 6"W x 6"H / Frosted Lens / Up 18W, Dn 36W, 5400L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
66PSF96LUR24WD48WDMV40KWH-HC3015WWH	96"L x 6"W x 6"H / Frosted Lens / Up 24W, Dn 48W, 7200L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
66PSF96LUR36WD72WDMV40KWH-HC3015WWH	96"L x 6"W x 6"H / Frosted Lens / Up 36W, Dn 72W, 10800L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord

EM6 G120 OS2 RGBW D1MV 90CRI CCT1 WALL X1LED FLUOR

## PENDANT CANOPY KITS

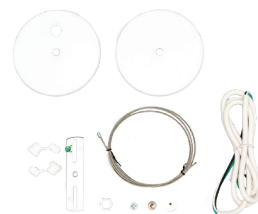

Pendant Canopy Kit (HC301WH/HC401WH are 5FT Length) & (HC302WH/HC402WH are 12FT Length).  
Standard Power Cords are 3 Wire for 5 Wire or 6 Wire Cords add 5W or 6W after number.



Power Feed Canopy Kit



Non Power Feed Kit

Both come in complete kit.

# X1LED



## 4X4 LINEAR PENDANT

ITEM NO.	DESCRIPTION
44PSF117X1WHLN15W40-HC301WH	4" x 24" 1700 Lumen Pendant w/Cable Kit 1x15W LED T8 4000K Lamps Included
44PSF217X1WHLN15W40-HC301WH	4" x 24" 3400 Lumen Pendant w/Cable Kit 2x15W LED T8 4000K Lamps Included
44PSF132X1WHLN18W40-HC301WH	4" x 48" 2100 Lumen Pendant w/Cable Kit 1x18W LED T8 4000K Lamps Included
44PSF232X1WHLN18W40-HC301WH	4" x 48" 4200 Lumen Pendant w/Cable Kit 2x18W LED T8 4000K Lamps Included
44PSF1328X1WHLN18W40-HC301WH	4" x 96" 4200 Lumen Pendant w/Cable Kit 2x18W LED T8 4000K Lamps Included
44PSF2328X1WHLN18W40-HC301WH	4" x 96" 8400 Lumen Pendant w/Cable Kit 4x18W LED T8 4000K Lamps Included

EM8 OS5 CCT2 SURF PEND WALL LED FLUOR X1LEDT8D

Change SF (Snap Fit Frosted Lens) to MW for Matte White Regressed Lens  
Change HC301WH to HC302WH for 10" Cable Kit.  
Change WH to BK (Black), IR (Iron), SL (Silver) or BR (Bronze).  
For surface mount, remove HC301WH.

## 6X6 LINEAR PENDANT

ITEM NO.	DESCRIPTION
66PMW117X1WHLN15W40-HC301WH	6" x 26" 1700 Lumen Pendant w/Cable Kit 1x15W LED T8 4000K Lamps Included
66PMW217X1WHLN15W40-HC301WH	6" x 26" 3400 Lumen Pendant w/Cable Kit 2x15W LED T8 4000K Lamps Included
66PMW132X1WHLN18W40-HC301WH	6" x 48" 2100 Lumen Pendant w/Cable Kit 1x18W LED T8 4000K Lamps Included
66PMW232X1WHLN18W40-HC301WH	6" x 48" 4200 Lumen Pendant w/Cable Kit 2x18W LED T8 4000K Lamps Included
66PMW1328X1WHLN18W40-HC301WH	6" x 96" 4200 Lumen Pendant w/Cable Kit 2x18W LED T8 4000K Lamps Included
66PMW2328X1WHLN18W40-HC301WH	6" x 96" 8400 Lumen Pendant w/Cable Kit 4x18W LED T8 4000K Lamps Included

EM8 OS5 SURF PEND WALL LED FLUOR X1LEDT8D

Change HC301WH to HC302WH for 10" Cable Kit.  
Change WH to BK (Black), IR (Iron), SL (Silver) or BR (Bronze).  
For surface mount, remove HC301WH.  
For Baffled Louver, change MW to BL.

## LED T8 PENDANT (SUSPENDED ONLY - COMES W/ PENDANT)

ITEM NO.	DESCRIPTION
LTX132X1CHLN18W40K	48" Linear Pendant 2100 Lumens 1x18W LED T8 Chrome
LTX132X1WHLN18W40K	48" Linear Pendant 2100 Lumens 1x18W LED T8 White

CCT2 X1LEDT8D

Comes with 5ft Cable Kit.



# Linear

(Pendant & Surface Mount)



JUST RIGHT,  
RIGHT NOW.

Choice of 2.2" or 3.5" Wide Linear Aluminum Channel available in 4ft and 8ft or join for longer runs for direct lighting. 2.2" is also available in direct and indirect output. Ships in less than 48 hours.

## LED LINEAR PENDANT CHANNEL 2.2" X 2.80" **NEW** DIRECT AND INDIRECT

Aluminum 2.2" profile with the perfect ratio direct and indirect light. Frosted lens housed in Satin Aluminum or white finished channel. Ideal for open office plans, it comes in 4- or 8- foot individual fixtures or join multiple fixtures for continuous runs. Dubbed "the easiest LED channel in the industry", the CLLBF is easy to specify, order, and install, and ships in less than 48 hours.



2 LED Strips provides uplight. 40% uplight and 60% downlight is ideal for most applications.



2.2" Wide Silhouette x 3.2" Height with Integral Driver for 0-10V Dimming.

ITEM NO.	DESCRIPTION
CLLLBF48LU18WD27WDMV30KSAHC705WH	2.2"W X 2.8"H X 48.43"L / LED Direct/Indirect Pend / Up 18W, Dn 27W, 4500L Total / 0-10V Dim / 3000K / Satin Aluminum / 5FT Cable Kit
CLLLBF96LU36WD54WDMV30KSAHC705WH	2.2"W X 2.8"H X 96.42"L / LED Direct/Indirect Pend / Up 36W, Dn 54W, 9000L Total / 0-10V Dim / 3000K / Satin Aluminum / 5FT Cable Kit
CLLLBF144LU54WD81WDMV30KSAHC705WH	144"L x 2.2"W x 2.8"H / LED Direct/Indirect Pend / Up 54W, Dn 81W, 13500L Total / 0-10V Dim / 3000K / Satin Aluminum / 5FT Cable Kit
CLLLBF192LU72WD108WDMV30KSAHC705WH	192"L x 2.2"W x 2.8"H / LED Direct/Indirect Pend / Up 72W, Dn 108W, 18000L Total / 0-10V Dim / 3000K / Satin Aluminum / 5FT Cable Kit

**OS3** **CCT4**

For White Finish Change SA to WH. For 12ft Mounting cable change HC705WH to HC712WH.


This series, as well as the other CLLL series ship from stock within 48 hours.




Sensor option.  
Consult Factory.

For White Finish, Change SA to WH. For 12ft cable kit change HC605WH to HC612WH.

2 SIZES READY TO SHIP  
Satin Aluminum or White Finishes



LLLSF  
2.16" Wide, 2.75" Tall



LLLSG  
3.54" Wide, 3.38" Tall



## LED LINEAR PENDANT CHANNEL 2.2" X 3.15" DOWNLIGHT ONLY

Aluminum 2.2" profile with the perfect amount of smooth downlight. Frosted lens housed in Satin Aluminum or white finished channel. Ideal for open office plans, it comes in 4 or 8 foot individual fixtures or join multiple fixtures for continuous runs. Dubbed "the easiest LED channel in the industry", the CLLLSF is easy to specify, order, and install, and ships in less than 48 hours.

Surface

ITEM NO.	DESCRIPTION
CLLLSF48L31WCDMV30KSASURF	Aluminum Channel / 48"L x 2.2"W x 2.8"H / 31W 3100L / 0-10V Dim / 3000K / Satin Aluminum / Surface Mount
CLLLSF96L62WCDMV30KSASURF	Aluminum Channel / 96"L x 2.2"W x 2.8"H / 62W 6200L / 0-10V Dim / 3000K / Satin Aluminum / Surface Mount
CLLLSF144L93WCDMV30KSASURF	Aluminum Channel / 144"L x 2.2"W x 2.8"H / 93W 9300L / 0-10V Dim / 3000K / Satin Aluminum / Surface Mount
CLLLSF192L124WCDMV30KSASURF	Aluminum Channel / 192"L x 2.2"W x 2.8"H / 124W 12400L / 0-10V Dim / 3000K / Satin Aluminum / Surface Mount

Pendant

ITEM NO.	DESCRIPTION
CLLLSF48L31WCDMV30KSAHC605WH	Aluminum Channel / 48"L x 2.2"W x 2.8"H / 31W 3100L / 0-10V Dim / 3000K / Satin Aluminum / 5' WH Canopy Kit
CLLLSF96L62WCDMV30KSAHC605WH	Aluminum Channel / 96"L x 2.2"W x 2.8"H / 62W 6200L / 0-10V Dim / 3000K / Satin Aluminum / 5' WH Canopy Kit
CLLLSF144L93WCDMV30KSAHC605WH	Aluminum Channel / 144"L x 2.2"W x 2.8"H / 93W 9300L / 0-10V Dim / 3000K / Satin Aluminum / 5' WH Canopy Kit
CLLLSF192L124WCDMV30KSAHC605WH	Aluminum Channel / 192"L x 2.2"W x 2.8"H / 124W 12400L / 0-10V Dim / 3000K / Satin Aluminum / 5' WH Canopy Kit

**OS3** **CCT3** **SURF**

## LED LINEAR PENDANT CHANNEL 3.25" X 2.8" DOWNLIGHT ONLY

Aluminum 3.5" profile with the perfect amount of smooth downlight. See description above.

Surface

ITEM NO.	DESCRIPTION
CLLLSG48L45WCDMV30KSASURF	Aluminum Channel / 48"L x 3.5"W x 2.8"H / 45W 5000L / 0-10V Dim / 3000K / Satin Aluminum / Surface Mount
CLLLSG96L90WCDMV30KSASURF	Aluminum Channel / 96"L x 3.5"W x 2.8"H / 90W 10000L / 0-10V Dim / 3000K / Satin Aluminum / Surface Mount
CLLLSG144L135WCDMV30KSASURF	Aluminum Channel / 144"L x 3.5"W x 2.8"H / 135W 13500L / 0-10V Dim / 3000K / Satin Aluminum / Surface Mount
CLLLSG192L180WCDMV30KSASURF	Aluminum Channel / 192"L x 3.5"W x 2.8"H / 180W 18000L / 0-10V Dim / 3000K / Satin Aluminum / Surface Mount




Pendant

CLLLSG48L45WCDMV30KSAHC605WH	Aluminum Channel / 48"L x 3.5"W x 2.8"H / 45W 5000L / 0-10V Dim / 3000K / Satin Aluminum / 5' WH Canopy Kit
CLLLSG96L90WCDMV30KSAHC605WH	Aluminum Channel / 96"L x 3.5"W x 2.8"H / 90W 10000L / 0-10V Dim / 3000K / Satin Aluminum / 5' WH Canopy Kit
CLLLSG144L135WCDMV30KSAHC605WH	Aluminum Channel / 144"L x 3.5"W x 2.8"H / 135W 13500L / 0-10V Dim / 3000K / Satin Aluminum / 5' WH Canopy Kit
CLLLSG192L180WCDMV30KSAHC605WH	Aluminum Channel / 192"L x 3.5"W x 2.8"H / 180W 18000L / 0-10V Dim / 3000K / Satin Aluminum / 5' WH Canopy Kit

**CCT3** **SURF**

# Linear

(Pendant & Surface Mount)

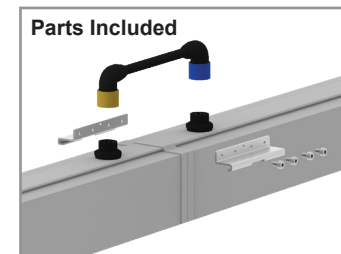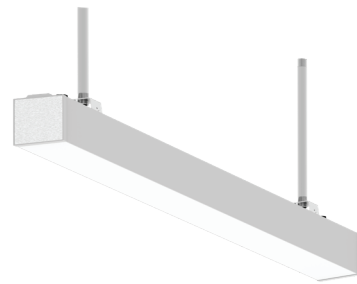

## WET LOCATION LINEAR PENDANT **NEW**

Now bring your exterior applications to life with a special designed wet location linear pendant. This aluminum extrusion is 3.5" wide for a bold yet minimal look with a sealed lens to keep out moisture and bugs. Specially designed power cord and mounting kits allows the fixture to be pendant or surface mounted. Choose individual fixtures or fixtures made especially for continuous runs. Both versions complete with all mounting brackets and joiner accessories. Available in satin aluminum and in 4000 and 5000 kelvin or consult for other custom options.

ITEM NO.	DESCRIPTION
Individual Fixtures	
CWLLL48L45W4900LDMV40KSA	48.7"L x 3.58"W x 3.58"H / Frosted Lens / 45W, 4900L / 0-10V Dim / 4000K / Satin Aluminum / Included 1xWLLLPF6, 1xWLLLMT
CWLLL96L90W9800LDMV40KSA	96.7"L x 3.58"W x 3.58"H / Frosted Lens / 90W, 9800L / 0-10V Dim / 4000K / Satin Aluminum / Included 1xWLLLPF6, 1xWLLLMT
Longer Run - Specify Beginner (-B), Joiner (-J) and Ender (-E)	
CWLLL48L45W4900LDMV40KSA-B	48.7"L x 3.58"W x 3.58"H / Frosted Lens / 45W, 4900L / 0-10V Dim / 4000K / Satin Aluminum / Beginner / Included 1xWLLLPF6, 1xWLLLMT
CWLLL96L90W9800LDMV40KSA-B	96.7"L x 3.58"W x 3.58"H / Frosted Lens / 90W, 9800L / 0-10V Dim / 4000K / Satin Aluminum / Beginner / Included 1xWLLLPF6, 1xWLLLMT
CWLLL48L45W4900LDMV40KSA-J	48.7"L x 3.58"W x 3.58"H / Frosted Lens / 45W, 4900L / 0-10V Dim / 4000K / Satin Aluminum / Joiner / Included 1xWLLLMT, 1xWLLLJB, WLLJN8
CWLLL96L90W9800LDMV40KSA-J	96.7"L x 3.58"W x 3.58"H / Frosted Lens / 90W, 9800L / 0-10V Dim / 4000K / Satin Aluminum / Joiner / Included 1xWLLLMT, 1xWLLLJB, WLLJN8
CWLLL48L45W4900LDMV40KSA-E	48.7"L x 3.58"W x 3.58"H / Frosted Lens / 45W, 4900L / 0-10V Dim / 4000K / Satin Aluminum / Ender / Included 1xWLLLMT, 1xWLLLJB, WLLJN8
CWLLL96L90W9800LDMV40KSA-E	96.7"L x 3.58"W x 3.58"H / Frosted Lens / 90W, 9800L / 0-10V Dim / 4000K / Satin Aluminum / Ender / Included 1xWLLLMT, 1xWLLLJB, WLLJN8
Accessories (only for specials)	
WLLLPF6	6ft black 5 wires dimming power feed with fast connector one side
WLLJN8	8.67" black dimming wiring harness with fast connector both side
WLLLMT	Fix Clips for surface mounted and pendant bracket / 2 pieces per set
WLLLJB	180° Straight connector / 2 pieces per set


**CCT6 WET**



Create Linear Impact Outdoors

# Acoustical Lighting

See website <https://www.saylite.com/products/acoustical-lighting> for complete acoustical lighting assortment.

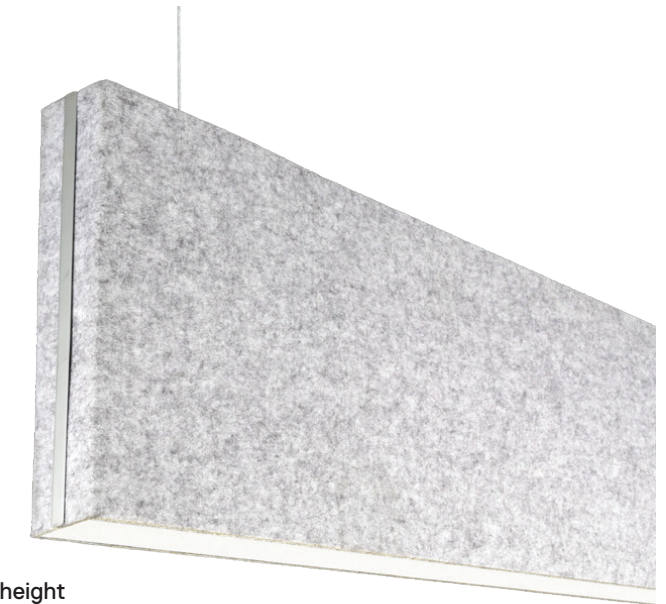

## LINEAR BAFFLE ACOUSTIC

This highly customizable fixture seamlessly integrates quality lighting with sound absorbing technology. With four different length options, three different height options, and three different end styles, the creative possibilities are endless for your unique space. It is functional as a stand alone fixture or as part of a matching baffle system.

SERIES	LENGTH	X	HEIGHT	GEAR	DIRECT/INDIRECT	WATTAGE & LUMENS	DRIVER	COLOR TEMP
LAB Linear Acoustic Baffle	24	24.00"	12	LY	D	12Watts 1320 Lumens 24Watts 2640 Lumens	DMV G120 0-10V dimming Triac or ELV dimming at 120V only	30K
			16		U			35K
			24					40K
	48	48.00"	Consult for other height options			24Watts 2640 Lumens		50K
			48W	48 Watts 5280 Lumens				
			72W	72 Watts 7920 Lumens				
96	96.00"				52Watts 5720 Lumens 96Watts 10560 Lumens			

FLAIR A	FLAIR B	MATERIAL CLASS	OPTIONS
A52 Latte	Blank Regressed	Blank Class B	HC605WH Cable kit with 6' cable & 5 wire power feed/cable incl., clear cord and white canopy (included power feed and non-power feed)
A50 Caramel	W Wood Ends	A Class A	HC605WHNPF Cable kit with 6' cable & white canopy, non power feed (non-power feed only)
A43 Lava	M Metal Seam		

Consult for pricing.

## Unit Baffles

SERIES	LENGTH	X	HEIGHT	FLAIR A	FLAIR B	MATERIAL CLASS	OPTIONS
LAB Linear Acoustic Baffle	24	24.00"	12	A52	Blank	Class B	HC605WHNPF Cable kit with 6' cable & white canopy, non power feed (non-power feed only)
			16	A50	W	Class A	
			24	A43	M	HC612WHNPF Cable kit with 12' cable & white canopy, non power feed (non-power feed only)	
			24.00"				

# Linear

(Pendant & Surface Mount)



For continuous runs, see ordering on page 79.

Consult for PLIN series in X1LED

## LED LINEAR LOW PROFILE ELLIPSOIDAL DIRECT/INDIRECT

When suspended, this sleek and compact, low profile ellipsoidal fixture appears to float in the space and is especially designed for direct/indirect lighting. Available in 96" and 48" modular lengths for individual or row configurations.

ITEM NO.	DESCRIPTION
<b>Downlight</b>	
LPLINFR48LY48W5900LDMV40KWHHC4015WWH	48"L x 10.80"W x 3.50"W / Dn 48W, 5900L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
LPLINFR96LY96W11850LDMV40KWHHC4015WWH	96"L x 10.80"W x 3.50"W / Dn 96W, 11850L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
<b>Up and Downlight</b>	
LPLINFR48LUI12WD24WDMV40KWHHC4015WWH	48"L x 10.80"W x 3.50"W / Up 12W, Dn 24W, 4790L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
LPLINFR48LUI16WD32WDMV40KWHHC4015WWH	48"L x 10.80"W x 3.50"W / Up 16W, Dn 32W, 6470L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
LPLINFR48LUI30WD60WDMV40KWHHC4015WWH	48"L x 10.80"W x 3.50"W / Up 30W, Dn 60W, 10820L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
LPLINFR96LUI24WD48WDMV40KWHHC4015WWH	96"L x 10.80"W x 3.50"W / Up 24W, Dn 48W, 9580L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
LPLINFR96LUI32WD64WDMV40KWHHC4015WWH	96"L x 10.80"W x 3.50"W / Up 32W, Dn 64W, 12940L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
LPLINFR96LUI60WD120WDMV40KWHHC4015WWH	96"L x 10.80"W x 3.50"W / Up 60W, Dn 120W, 21640L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord

EM3 G120 OS1 RGBW D1MV 90CRI CCT1

## SLOTTED LOW PROFILE LED LINEAR PENDANT

The clean SLP's lines are ideal for general lighting for circulation spaces, high impact areas, kitchen islands, and offices. Can be pendant-mounted individually or in continuous runs. Add sensors. Smart sensors available.

ITEM NO.	DESCRIPTION
<b>Downlight</b>	
SLPFR48LY48W5400LDMV40KWHHC4015WWH	48"L x 7.70"W x 2"W / Frosted Lens / 48W, 5400L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
SLPFR96LY96W10800LDMV40KWHHC4015WWH	96"L x 7.70"W x 2"W / Frosted Lens / 96W, 10800L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
<b>Up and Downlight</b>	
SLPFR48LUI12WD24WDMV40KWHHC4015WWH	48"L x 7.70"W x 2"W / Frosted Lens / Up 12W, Dn 24W, 3600L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
SLPFR48LUI18WD36WDMV40KWHHC4015WWH	48"L x 7.70"W x 2"W / Frosted Lens / Up 18W, Dn 36W, 5400L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
SLPFR96LUI24WD48WDMV40KWHHC4015WWH	96"L x 7.70"W x 2"W / Frosted Lens / Up 24W, Dn 48W, 7200L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
SLPFR96LUI36WD72WDMV40KWHHC4015WWH	96"L x 7.70"W x 2"W / Frosted Lens / Up 36W, Dn 72W, 10800L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord

EM6 G120 OS2 RGBW D1MV 90CRI CCT1 SURF WALL X1LEDT5 FLUORT5



New Door Frame and Lens is a high style option for LED.

Consult for finish options.



Consult for Inlay Lens.

## LED LINEAR PENDANT HIGH BAY WITH LENS

FHBFR features a frosted lens, ideal for office and retail applications. Premium full specular white reflectors are standard for high efficiency lighting.

ITEM NO.	DESCRIPTION
FHBFR48LS32W4050LW30DMV40K	48"L x 11.25"W x 4.25"H / Frosted Lens / 32W, 4050L / 0-10V Dim / 4000K
FHBFR48LY48W5650LW30DMV40K	48"L x 11.25"W x 4.25"H / Frosted Lens / 48W, 5650L / 0-10V Dim / 4000K
FHBFR48LY57W6400LW30DMV40K	48"L x 11.25"W x 4.25"H / Frosted Lens / 57W, 6400L / 0-10V Dim / 4000K
FHBFR48LY72W8200LW30DMV40K	48"L x 11.25"W x 4.25"H / Frosted Lens / 72W, 8200L / 0-10V Dim / 4000K
FHBFR96LY97W11300LW30DMV40K	96"L x 11.25"W x 4.25"H / Frosted Lens / 97W, 11300L / 0-10V Dim / 4000K
FHBFR96LY114W12800LW30DMV40K	96"L x 11.25"W x 4.25"H / Frosted Lens / 114W, 12800L / 0-10V Dim / 4000K

EM2 G120 RGBW D1MV 90CRI CCT1 X1LED FLUOR

## LED LINEAR PENDANT HIGH BAY WITH BAFFLE

FHB features a specially designed baffle to reduce glare. Premium full specular white reflectors are standard for high efficiency lighting. Ideal for retail applications.

ITEM NO.	DESCRIPTION
FHBL48LY32W4050LW30DMV40K	48"L x 11.25"W x 4.25"H / Baffle / 32W, 4050L / 0-10V Dim / 4000K
FHBL48LY48W5400LW30DMV40K	48"L x 11.25"W x 4.25"H / Baffle / 48W, 5400L / 0-10V Dim / 4000K
FHBL48LY57W6000LW30DMV40K	48"L x 11.25"W x 4.25"H / Baffle / 57W, 6000L / 0-10V Dim / 4000K
FHBL48LY72W7600LW30DMV40K	48"L x 11.25"W x 4.25"H / Baffle / 72W, 7600L / 0-10V Dim / 4000K
FHBL96LY97W10800LW30DMV40K	96"L x 11.25"W x 4.25"H / Baffle / 97W, 10800L / 0-10V Dim / 4000K
FHBL96LY114W12000LW30DMV40K	96"L x 11.25"W x 4.25"H / Baffle / 114W, 12000L / 0-10V Dim / 4000K

EM2 G120 RGBW D1MV 90CRI CCT1 X1LED FLUOR

## LED LINEAR PENDANT LOUVERED INDUSTRIAL 6"

This direct, louvered, industrial strip makes a bold statement perfect for a modern industrial aesthetic. Louver is matte silver anodized parabolic.

ITEM NO.	DESCRIPTION
LVS648LY48W4000LDMV40KWHHC3015WWH	48"L x 6"W x 5.12"H / Louver / 48W, 4000L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
LVS648LY57W4800LDMV40KWHHC3015WWH	48"L x 6"W x 5.12"H / Louver / 57W, 4800L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
LVS648LY72W6000LDMV40KWHHC3015WWH	48"L x 6"W x 5.12"H / Louver / 72W, 6000L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
LVS696LY48W4000LDMV40KWHHC3015WWH	96"L x 6"W x 5.12"H / Louver / 48W, 4000L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
LVS696LY96W8000LDMV40KWHHC3015WWH	96"L x 6"W x 5.12"H / Louver / 96W, 8000L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
LVS696LY114W9600LDMV40KWHHC3015WWH	96"L x 6"W x 5.12"H / Louver / 114W, 9600L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
LVS696LY144W12000LDMV40KWHHC3015WWH	96"L x 6"W x 5.12"H / Louver / 144W, 12000L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord



EM2 G120 RGBW D1MV 90CRI CCT1 SURF X1LED FLUOR

For Inlay Lens add MW after LVS. Available in Black (BK), Silver (SL), Bronze (BZ) or Galvanized (GV). Consult for lensed version.

# Linear

(Pendant & Surface Mount)

Make a bold statement with a minimalist design using the MAX linear light. Available in a variety of standard powder coated finish options, as well as custom colors. Scaled to the LED module, the drop frosted diffuser surrounds the LEDs for soft lighting. Use them individually or in a continuous run, either surface, wall, or pendant mounted. Available in two widths to perfectly fit your space. Ideal for retail applications.

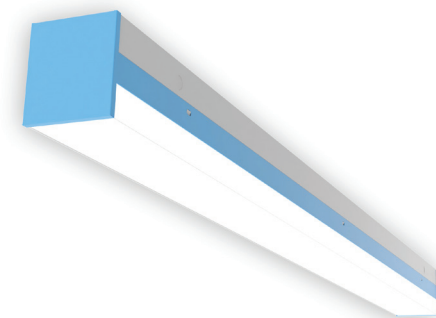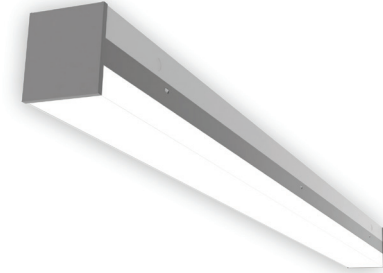

## MAX LED STRIP 2"

A low-profile LED strip with a frosted, dropped lens that diffuses light in three directions. Available in a variety of standard powder coated finishes.

ITEM NO.	DESCRIPTION
MAX2FR24LQ14W1700LDMV40KWH	MAX/ 2"W x 24"L/ 14W/ 1700 LUMEN
MAX2FR24LQ22W2600LDMV40KWH	MAX/ 2"W x 24"L/ 22W/ 2600 LUMEN
MAX2FR36LQ21W2550LDMV40KWH	MAX/ 2"W x 36"L/ 21W/ 2550 LUMEN
MAX2FR36LQ33W3900LDMV40KWH	MAX/ 2"W x 36"L/ 33W/ 3900 LUMEN
MAX2FR48LQ28W3400LDMV40KWH	MAX/ 2"W x 48"L/ 28W/ 3400 LUMEN
MAX2FR48LQ44W5200LDMV40KWH	MAX/ 2"W x 48"L/ 44W/ 5200 LUMEN
MAX2FR96LQ56W6800LDMV40KWH	MAX/ 2"W x 96"L/ 56W/ 6800 LUMEN
MAX2FR96LQ88W10400LDMV40KWH	MAX/ 2"W x 96"L/ 88W/ 10400 LUMEN

EM2 OS2 CCT1 PEND WALL

For pendant mount, add HC3015WWH.


## MAX LED STRIP 3"

A low-profile LED strip with a frosted, dropped lens that diffuses light in three directions. Available in a variety of standard powder coated finishes.

ITEM NO.	DESCRIPTION
MAX3FR24LQ20W2500LDMV40KWH	MAX/ 3"W x 24"L/ 20W/ 2500 LUMEN
MAX3FR24LB41W5000LDMV40KWH	MAX/ 3"W x 24"L/ 41W/ 5000 LUMEN
MAX3FR36LQ28W3000LDMV40KWH	MAX/ 3"W x 36"L/ 28W/ 3000 LUMEN
MAX3FR48LQ41W5000LDMV40KWH	MAX/ 3"W x 48"L/ 41W/ 5000 LUMEN
MAX3FR48LB82W10000LDMV40KWH	MAX/ 3"W x 48"L/ 82W/ 10000 LUMEN
MAX3FR96Q82W10000LDMV40KWH	MAX/ 3"W x 96"L/ 82W/10000 LUMEN
MAX3FR96LB164W20000DMV40KWH	MAX/ 3"W x 96"L/ 164W/ 20000 LUMEN

EM2 OS2 CCT1 PEND WALL

For pendant mount, add HC3015WWH.

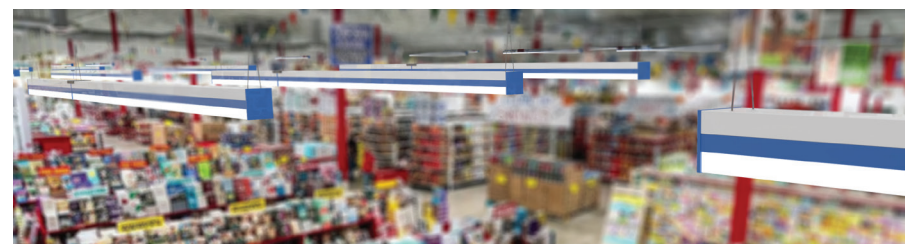

## ROUND MAX LED STRIP 2"

Add a new dimension to your design with our all NEW Round Max LED Strip. Equipped with a drop frosted diffuser to provide soft lighting from all three sides.

ITEM NO.	DESCRIPTION
RDX2FR24LQ14W1700LDMV40KWH	RDX/ 2"W x 24"L/ 14W/ 1700 LUMEN
RDX2FR24LQ22W2600LDMV40KWH	RDX/ 2"W x 24"L/ 22W/ 2600 LUMEN
RDX2FR36LQ21W2550LDMV40KWH	RDX/ 2"W x 36"L/ 21W/ 2550 LUMEN
RDX2FR36LQ33W3900LDMV40KWH	RDX/ 2"W x 36"L/ 33W/ 3900 LUMEN
RDX2FR48LQ28W3400LDMV40KWH	RDX/ 2"W x 48"L/ 28W/ 3400 LUMEN
RDX2FR48LQ44W5200LDMV40KWH	RDX/ 2"W x 48"L/ 44W/ 5200 LUMEN
RDX2FR96LQ56W6800LDMV40KWH	RDX/ 2"W x 96"L/ 56W/ 6800 LUMEN
RDX2FR96LQ88W10400LDMV40KWH	RDX/ 2"W x 96"L/ 88W/ 10400 LUMEN

EM2 OS2 CCT1 WALL PEND

For pendant mount, add HC3015WWH.

## ROUND MAX LED STRIP 3"

Get maximum lighting coverage with minimalistic design. Equipped with a drop frosted diffuser to provide soft lighting from all three sides.

ITEM NO.	DESCRIPTION
RDX3FR24LQ20W2500LDMV40KWH	RDX/ 3"W x 24"L/ 20W/ 2500 LUMEN
RDX3FR24LB41W5000LDMV40KWH	RDX/ 3"W x 24"L/ 41W/ 5000 LUMEN
RDX3FR36LQ28W3000LDMV40KWH	RDX/ 3"W x 36"L/ 28W/ 3000 LUMEN
RDX3FR48LQ41W5000LDMV40KWH	RDX/ 3"W x 48"L/ 41W/ 5000 LUMEN
RDX3FR48LB82W10000LDMV40KWH	RDX/ 3"W x 48"L/ 82W/ 10000 LUMEN
RDX3FR96LQ82W10000LDMV40KWH	RDX/ 3"W x 96"L/ 82W/10000 LUMEN
RDX3FR96LB164W20000DMV40KWH	RDX/ 3"W x 96"L/ 164W/ 20000 LUMEN

EM2 OS2 CCT1 WALL PEND

For pendant mount, add HC3015WWH.

Ideal for corridors, over mirrors or merchandising to draw people into the space.



Round Max is available in two different sizes. Get the sleek look with the 2" RDX or a heavy duty look with 3" RDX

# Linear

(Pendant & Surface Mount)



## LED LINEAR CONTOURED STRIP

A versatile workhorse with great lighting in all directions out of the lens specifically designed for LED. Can be wall, ceiling, surface or pendant mounted. Standard in white, but with a variety of finish options. Available in 3 sizes for individual or continuous run.

ITEM NO.	DESCRIPTION
SERFR24LT14W1400LDMV40KWH	24"L x 3.79"W x 3.93"H / Frosted Lens / 14W, 1400L / 0-10V Dim / 4000K
SERFR24LT20W2000LDMV40KWH	24"L x 3.79"W x 3.93"H / Frosted Lens / 20W, 2000L / 0-10V Dim / 4000K
SERFR48LT28W2800LDMV40KWH	48"L x 3.79"W x 3.93"H / Frosted Lens / 28W, 2800L / 0-10V Dim / 4000K
SERFR48LT40W4000LDMV40KWH	48"L x 3.79"W x 3.93"H / Frosted Lens / 40W, 4000L / 0-10V Dim / 4000K
SERFR96LT56W5600LDMV40KWH	96"L x 3.79"W x 3.93"H / Frosted Lens / 56W, 5600L / 0-10V Dim / 4000K
SERFR96LT80W8000LDMV40KWH	96"L x 3.79"W x 3.93"H / Frosted Lens / 80W, 8000L / 0-10V Dim / 4000K

EM6 G120 OS3 RGBW D1MV 90CRI CCT1 SURF XILED5 FLUORT5

Specify pendant cable kit separately, see page 153.

## LINEAR STRIP WORKHORSE

Ideal for continuous runs, this medium body strip with a frosted lens is sleek and stylized, yet economical. Ideal for many retail and industrial applications as well as mezzanine low-ceiling installations where a wide distribution is needed.



Pendant mount available.

ITEM NO.	DESCRIPTION
FSFFR48LY31W3400LDMV40KWH	48"L x 4.25"W x 3.25"H / Frosted Lens / 31W, 3400L / 0-10V Dim / 4000K / White
FSFFR48LY57W6300LDMV40KWH	48"L x 4.25"W x 3.25"H / Frosted Lens / 57W, 6300L / 0-10V Dim / 4000K / White
FSFFR96LY62W6600LDMV40KWH	96"L x 4.25"W x 3.25"H / Frosted Lens / 62W, 6600L / 0-10V Dim / 4000K / White
FSFFR96LY114W12600LDMV40KWH	96"L x 4.25"W x 3.25"H / Frosted Lens / 114W, 12600L / 0-10V Dim / 4000K / White

EM6 G120 OS1 RGBW D1MV 90CRI CCT1

For Sensor Option add SM in front or MDT4. See Retrofit Kit on page 92.

## ECONOMY LENSED STRIP

Ideal for cove lighting, this sleek, enclosed strip is highly engineered for quick installation, low maintenance, and long life. Available in 2', 4', and 8' lengths for individual or continuous run.



ITEM NO.	DESCRIPTION
RKDFR24LY12W1200LDMV40KWH	24"L x 1.96"W x 2.93"H / Frosted Lens / 12W, 1200L / 0-10V Dim / 4000K
RKDFR24LY24W2400LDMV40KWH	24"L x 1.96"W x 2.93"H / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K
RKDFR48LY28W2800LDMV40KWH	48"L x 1.96"W x 2.93"H / Frosted Lens / 28W, 2800L / 0-10V Dim / 4000K
RKDFR48LY48W4800LDMV40KWH	48"L x 1.96"W x 2.93"H / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K
RKDFR96LY57W5700LDMV30KWH	48"L x 1.96"W x 2.93"H / Frosted Lens / 57W, 5700L / 0-10V Dim / 4000K
RKDFR96LY96W9600LDMV40KWH	48"L x 1.96"W x 2.93"H / Frosted Lens / 96W, 9600L / 0-10V Dim / 4000K

EM3 G120 RGBW D1MV 90CRI CCT1

For Continuous runs add P11 or P13D after DMV for Electrical Connector.



## LINEAR STRIP

Designed for commercial (warehouse, office, garage, display shop) applications. The 8 foot fixture features one lens, for a clean, continuous appearance and an ideal replacement for fluorescent strips.

ITEM NO.	DESCRIPTION
JSR48L36M4680LDMVMCT	42.44"L x 3.25"W x 3.75"H / Matt White Lens 24W/36W/40W, 3500/4000/5000K
JSR96L48M6240LDMVMCT	90.47"L x 3.25"W x 3.75"H 36W/48W/60W, 3500/4000/5000K

EM1 CCT2

## LINEAR STRIP

With it's slim design, this new linear strip light seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most application needs. Eight foot strip comes as two four foot strips that join together easily and with little visible seam.

Saves on handling and freight.



ITEM NO.	DESCRIPTION
GSR24L20W2600LDMVMCT	LED STRIP 2FT 20W DMV 30/40/50K
GSR48L33M4400MDMVMCT	LED STRIP 4FT 22/33/45W DMV 30/40/50K
GSR96L50M6800MDMVMCT	LED STRIP 8FT 33/50/69W DMV 30/40/50K

EM1 CCT2

## LED LENSED STRIP (4.25" WIDE)

Low profile economy linear strip provides light where you need it. End cap and lens finish the look and provides low glare lighting.



ITEM NO.	DESCRIPTION
C24LFRY15WDMV40K	24"L x 4.25"W x 2.95"H / Frosted Lens / 15W, 2500L / 0-10V Dim / 4000K
C24LFRY20WDMV40K	24"L x 4.25"W x 2.95"H / Frosted Lens / 20W, 3200L / 0-10V Dim / 4000K
C48LFRY25WDMV40K	48"L x 4.25"W x 2.95"H / Frosted Lens / 25W, 4200L / 0-10V Dim / 4000K
C48LFRY35WDMV40K	48"L x 4.25"W x 2.95"H / Frosted Lens / 35W, 5850L / 0-10V Dim / 4000K
C48LFRY45WDMV40K	48"L x 4.25"W x 2.95"H / Frosted Lens / 45W, 7400L / 0-10V Dim / 4000K
C96LFRY50WDMV40K	96"L x 4.25"W x 2.95"H / Frosted Lens / 50W, 8400L / 0-10V Dim / 4000K
C96LFRY70WDMV40K	96"L x 4.25"W x 2.95"H / Frosted Lens / 70W, 11700L / 0-10V Dim / 4000K
C96LFRY90WDMV40K	96"L x 4.25"W x 2.95"H / Frosted Lens / 90W, 14800L / 0-10V Dim / 4000K



EM6 G120 OS1 RGBW D1MV 90CRI CCT1 XILED FLUOR

For Wire Guard add WG. See specification sheet for more DLC item options.



# Linear

(Pendant & Surface Mount)



## INDUSTRIAL STRIP W/REFLECTOR AND LENS

ITEM NO.	DESCRIPTION
CIND48LY32W5000LW30DMV40K	48"L x 8.06"W x 4.25"H/ Frosted Lens and White Reflector / 32W, 5000L / 0-10V Dim / 4000K
CIND48LY57W7800LW30DMV40K	48"L x 8.06"W x 4.25"H/ Frosted Lens and White Reflector / 57W, 7800L / 0-10V Dim / 4000K
CIND96LY57W7800LW30DMV40K	96"L x 8.06"W x 4.25"H/ Frosted Lens and White Reflector / 57W, 7800L / 0-10V Dim / 4000K
CIND96LY97W12400LW30DMV40K	96"L x 8.06"W x 4.25"H/ Frosted Lens and White Reflector / 97W, 12400L / 0-10V Dim / 4000K
CIND96LY114W14000LW30DMV40K	96"L x 8.06"W x 4.25"H/ Frosted Lens and White Reflector / 114W, 14000L / 0-10V Dim / 4000K

EM1 G120 OS1 RGBW D1MV 90CRI CCT1

## INDUSTRIAL LED

Ideal for Ceilings Between 10 and 18 feet this workhorse provides concentrated illumination in a commercial quality configuration.

ITEM NO.	DESCRIPTION
IND48LY32W5000LW30DMV40K	48"L x 8.06"W x 4.25"H/ White Reflector / 32W, 5000L / 0-10V Dim / 4000K
IND48LY57W7800LW30DMV40K	48"L x 8.06"W x 4.25"H/ White Reflector / 57W, 7800L / 0-10V Dim / 4000K
IND96LY57W7800LW30DMV40K	96"L x 8.06"W x 4.25"H/ White Reflector / 57W, 7800L / 0-10V Dim / 4000K
IND96LY97W12400LW30DMV40K	96"L x 8.06"W x 4.25"H/ White Reflector / 97W, 12400L / 0-10V Dim / 4000K
IND96LY114W14000LW30DMV40K	96"L x 8.06"W x 4.25"H/ White Reflector / 114W, 14000L / 0-10V Dim / 4000K

EM6 G120 OS1 RGBW D1MV 90CRI CCT1 X1LED FLUOR

Add wire guard IND48WGW.

## INDUSTRIAL STRIP FAMILY

One style offered three ways to meet any industrial application – cost effective and high output - Open Strip, Frosted Lens, or a highly focused Narrow Reflector.

ITEM NO.	DESCRIPTION
<b>Enclosed with Hinged Frosted Lens</b>	
RRSFR48LY48W4600LDMV40K	48"L x 2.925"W x 3.395"H / Frosted Lens / 48W, 4600L / 0-10V Dim / 4000K
RRSFR48LY57W5400LDMV40K	48"L x 2.925"W x 3.395"H / Frosted Lens / 57W, 5400L / 0-10V Dim / 4000K
RRSFR96LY57W5400LDMV40K	96"L x 2.925"W x 3.395"H / Frosted Lens / 57W, 5400L / 0-10V Dim / 4000K
RRSFR96LY96W9200LDMV40K	96"L x 2.925"W x 3.395"H / Frosted Lens / 96W, 9200L / 0-10V Dim / 4000K
RRSFR96LY114W10400LDMV40K	96"L x 2.925"W x 3.395"H / Frosted Lens / 114W, 10400L / 0-10V Dim / 4000K
<b>Enhanced White Reflector</b>	
RRS48LY48W5650LW30DMV40K	48"L x 4.70"W x 6.20"H / White Reflector / 48W, 5650L / 0-10V Dim / 4000K
RRS48LY57W6400LW30DMV40K	48"L x 4.70"W x 6.20"H / White Reflector / 57W, 6400L / 0-10V Dim / 4000K
RRS96LY57W6400LW30DMV40K	96"L x 4.70"W x 6.20"H / White Reflector / 57W, 6400L / 0-10V Dim / 4000K
RRS96LY96W11300LW30DMV40K	96"L x 4.70"W x 6.20"H / White Reflector / 96W, 11300L / 0-10V Dim / 4000K
RRS96LY114W12800LW30DMV40K	96"L x 4.70"W x 6.20"H / White Reflector / 114W, 12800L / 0-10V Dim / 4000K
<b>Open Strip</b>	
RRS48LY28W4300LDMV40K	48"L x 2.925"W x 1.778"H/ Open / 28W, 4300L / 0-10V Dim / 4000K
RRS48LY48W7000LDMV40K	48"L x 2.925"W x 1.778"H/ Open / 48W, 7000L / 0-10V Dim / 4000K
RRS96LY57W8000LDMV40K	96"L x 2.925"W x 1.778"H/ Open / 57W, 8000L / 0-10V Dim / 4000K
RRS96LY96W12000LDMV40K	96"L x 2.925"W x 1.778"H/ Open / 96W, 12000L / 0-10V Dim / 4000K
RRS96LY114W13800LDMV40K	96"L x 2.925"W x 1.778"H/ Open / 114W, 13800L / 0-10V Dim / 4000K

EM6 G120 OS2 RGBW D1MV 90CRI CCT1

Lens

Multiple sensor options available.

Reflector (Narrow Spread)

Open



## SOHO SERIES

Latest in design for simple, yet elegant linear with the hint of a reflector. Available in either integral LED or X1LED. The X1LED is designed to look like integral LED with the sockets cleverly hidden. Choice of finishes.

ITEM NO.	DESCRIPTION
SOHFR48LT40W4400LDMV40KWH	48"L x 6.9"W x 3.5"H / Frosted Lens / 40W, 4400L / 0-10V Dim / 4000K / White
SOHFR48LT80W8800LDMV40KWH	48"L x 6.9"W x 3.5"H / Frosted Lens / 80W, 8800L / 0-10V Dim / 4000K / White
SOHFR232X1WHLN18W40	48"L x 6.9"W x 3.5"H / 4200 Lumen 2 x 18W LED T8 4000K Lamps Included / White

For Pendant Mount add - HC401WH (\$28 adder) or HC4015WWH (\$37 adder). For Red change WH to RD, Silver to SL and Bronze BZ and add \$20.

EM6 G120 D1MV 90CRI X1LED

## LED ROUND LENS W/ SMARTSENSE

Featuring a micro silhouette scaled to the LED module. The matte white diffuser surrounds the LEDs for soft lighting. Sensor in center of fixture provides control based occupancy.

ITEM NO.	DESCRIPTION
SSFSFFR48LY31W3400LDMV40KWH	48"L x 4.25"W x 3.25"H / Frosted Lens / Occ Sensor / 31W, 3400L / 0-10V Dim / 4000K / White
SSFSFFR48LY57W6300LDMV40KWH	48"L x 4.25"W x 3.25"H / Frosted Lens / Occ Sensor / 57W, 6300L / 0-10V Dim / 4000K / White
SSFSFFR96LY62W6600LDMV40KWH	96"L x 4.25"W x 3.25"H / Frosted Lens / Occ Sensor / 62W, 6600L / 0-10V Dim / 4000K / White
SSFSFFR96LY114W12600LDMV40KWH	96"L x 4.25"W x 3.25"H / Frosted Lens / Occ Sensor / 114W, 12600L / 0-10V Dim / 4000K / White

EM6 G120 OS1 RGBW D1MV 90CRI CCT1 X1LED FLUOR




## LED LINEAR 3" LOW PROFILE STRIP W/ SMARTSENSE

Fixture on when occupied, off when vacant.

ITEM NO.	DESCRIPTION
SSSKDWBFR24LZ35W3400LDMV40KWH	23.84"L x 3"W x 3"H / Occ Sensor / Frosted Lens / 35W, 3400L / 0-10V Dim / 4000K
SSSKDWBFR48LZ40W4000LDMV40KWH	46.00"L x 3"W x 3"H / Occ Sensor / Frosted Lens / 40W, 4000L / 0-10V Dim / 4000K
SSSKDWBFR48LZ72W7000LDMV40KWH	46.00"L x 3"W x 3"H / Occ Sensor / Frosted Lens / 72W, 7000L / 0-10V Dim / 4000K
SSSKDWBFR96LZ80W8000LDMV40KWH	92.00"L x 3"W x 3"H / Occ Sensor / Frosted Lens / 80W, 8000L / 0-10V Dim / 4000K
SSSKDWBFR96LZ114W10800LDMV40KWH	92.00"L x 3"W x 3"H / Occ Sensor / Frosted Lens / 114W, 10800L / 0-10V Dim / 4000K

EM6 G120 OS2 RGBW D1MV 90CRI CCT1 X1LED FLUOR

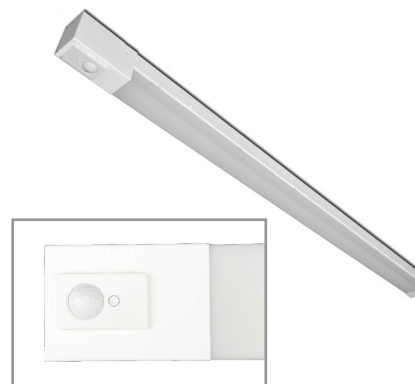

# Linear

(Pendant & Surface Mount)



## LED OPEN STRIP (4.25" WIDE)

This medium-body open strip is ideal for warehouses, retail, and utility areas requiring general illumination with a commercial wide strip configuration, low maintenance, and maximum flexibility to quickly change wattage, lumens, or color temperature, simply by changing the lamp. Frosted lens accessory available. Consult to add reflectors.

ITEM NO.	DESCRIPTION
C24LY15WDMV40K	24"L x 4.25"W x 2"H / Open / 15W, 2500L / 0-10V Dim / 4000K
C24LY20WDMV40K	24"L x 4.25"W x 2"H / Open / 20W, 3200L / 0-10V Dim / 4000K
C48LY25WDMV40K	48"L x 4.25"W x 2"H / Open / 25W, 4200L / 0-10V Dim / 4000K
C48LY35WDMV40K	48"L x 4.25"W x 2"H / Open / 35W, 5850L / 0-10V Dim / 4000K
C48LY45WDMV40K	48"L x 4.25"W x 2"H / Open / 45W, 7400L / 0-10V Dim / 4000K
C96LY50WDMV40K	96"L x 4.25"W x 2"H / Open / 50W, 8400L / 0-10V Dim / 4000K
C96LY70WDMV40K	96"L x 4.25"W x 2"H / Open / 70W, 11700L / 0-10V Dim / 4000K
C96LY90WDMV40K	96"L x 4.25"W x 2"H / Open / 90W, 14800L / 0-10V Dim / 4000K

EM6 G120 OS1 RGBW D1MV 90CRI CCT1 X1LED FLUOR

See specification sheet for more DLC item options.

## LED OPEN STRIP (2.75" WIDE)

This narrow open strip is ideal for warehouses, retail, and utility areas requiring general illumination with a commercial narrow strip configuration, low maintenance, and maximum flexibility to quickly change wattage, lumens, or color temperature, simply by changing the lamp. Frosted lens accessory available.

ITEM NO.	DESCRIPTION
S24LY20WDMV40K	24"L x 2.75"W x 2"H / Open / 20W, 3200L / 0-10V Dim / 4000K
S48LY40WDMV40K	48"L x 2.75"W x 2"H / Open / 40W, 6650L / 0-10V Dim / 4000K
S96LY80WDMV40K	96"L x 2.75"W x 2"H / Open / 80W, 13300L / 0-10V Dim / 4000K

### Frosted Lens

S24LFY20WDMV40K	24"L x 2.75"W x 2"H / Frosted Lens / 20W, 3200L / 0-10V Dim / 4000K
S48LFY40WDMV40K	48"L x 2.75"W x 2"H / Frosted Lens / 40W, 6650L / 0-10V Dim / 4000K
S96LFY80WDMV40K	96"L x 2.75"W x 2"H / Frosted Lens / 80W, 13300L / 0-10V Dim / 4000K

EM6 G120 OS1 RGBW D1MV 90CRI CCT1 X1LED FLUOR

## LED OPEN STRIP (1.62" WIDE)

KDS is a spec-grade, mini body open strip, ideal for size-critical applications such as display cabinets or coves.

ITEM NO.	DESCRIPTION
KDS48LY24W2800LDMV40K	48"L x 1.62"W x 1.62"H / 24W, 2800L / 0-10V Dim / 4000K
KDS48LY28W3200LDMV40K	48"L x 1.62"W x 1.62"H / 28W, 3200L / 0-10V Dim / 4000K
KDS48LY35W4000LDMV40K	48"L x 1.62"W x 1.62"H / 35W, 4000L / 0-10V Dim / 4000K
KDS96LY48W5650LDMV40K	96"L x 1.62"W x 1.62"H / 48W, 5650L / 0-10V Dim / 4000K
KDS96LY57W6400LDMV40K	96"L x 1.62"W x 1.62"H / 57W, 6400L / 0-10V Dim / 4000K
KDS96LY72W8000LDMV40K	96"L x 1.62"W x 1.62"H / 72W, 8000L / 0-10V Dim / 4000K

EM3 G120 RGBW D1MV 90CRI CCT1 X1LED FLUOR

For Wire Guard add WG.

# X1LED

## 2 OR 3 LIGHT STRIP 4.25"

ITEM NO.	DESCRIPTION
C217X1L18W40	2ft. Strip 3400 Lumen 2x15W LED T8 4000K Lamps Included
C317X1L18W40	2ft. Strip 5400 Lumen 3x15W LED T8 4000K Lamps Included
C232X1L18W40	4ft. Strip 4200 Lumen 2x18W LED T8 4000K Lamps Included
C332X1L18W40	4ft. Strip 6300 Lumen 3x18W LED T8 4000K Lamps Included
C2328X1L18W40	8ft. Tandem Strip 8400 Lumen 4x18W LED T8 4000K Lamps Included



BEST SELLER

EM9 OS5 CCT2 LED FLUOR X1LED8D

## 1 LIGHT STRIP 2.75"

ITEM NO.	DESCRIPTION
S117X1L18W40	2ft. Strip 1700 Lumen 1x15W LED T84000K Lamps Included
S132X1L18W40	4ft. Strip 2100 Lumen 1x18W LED T84000K Lamps Included
S1328X1L18W40	8ft. Tandem Strip 4200 Lumen 2x18W LED T8 4000K Lamps Included



EM9 OS5 CCT2 LED FLUOR X1LED8D

## MINI STRIP (1.6 IN.) 1 LIGHT

ITEM NO.	DESCRIPTION
KDST8117X1L18W40	1.6 " 2 ft. Strip 1700 Lumen 1x15W LED T84000K Lamps Included
KDST8132X1L18W40	1.6 " 4 ft. Strip 2100 Lumen 1x18W LED T84000K Lamps Included



EM3 CCT2 LED FLUOR X1LED8D

## INDUSTRIAL

ITEM NO.	DESCRIPTION
IND232W30X1L18W40	4ft. Industrial 4200 Lumen 2x18W LED T8 4000K Lamps Included
IND332W30X1L18W40	4ft. Industrial 6300 Lumen 3x18W LED T8 4000K Lamps Included
IND2328W30X1L18W40	8ft. Tandem Industrial 8400 Lumen 4x18W LED T8 4000K Lamps Included
IND3328W30X1L18W40	8ft. Tandem Industrial 12600 Lumen 6x18W LED T8 4000K Lamps Included



EM9 OS5 CCT2 LED FLUOR X1LED8D



Order IND48WG for Wire guard.






# Architectural Flair

**Exceed your lighting expectations, not your budget.**

Whether you're revitalizing an existing space or designing a new one, finding the right lighting shouldn't come down to a decision between visual appeal or affordability. At Saylite, we believe in delivering both.

Our Architectural Flair collection makes it easy to turn heads and create an impression from lighting designed with beauty and personality at its core. Every fixture is built with the latest energy-saving, long-lasting LED technology you depend on. And because of our efficient USA-based manufacturing structure and industrial designs, we offer a fair value that doesn't come at the expense of your bottom line.

For more information about Architectural Flair visit [sayliteshowcase.com](http://sayliteshowcase.com)

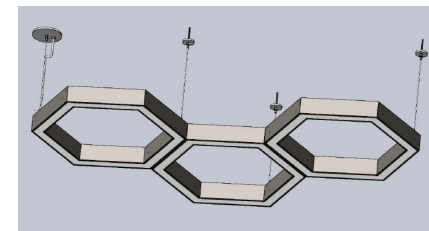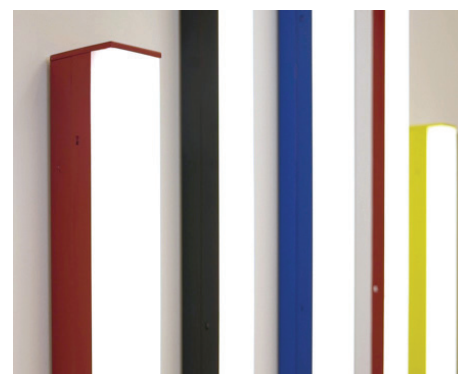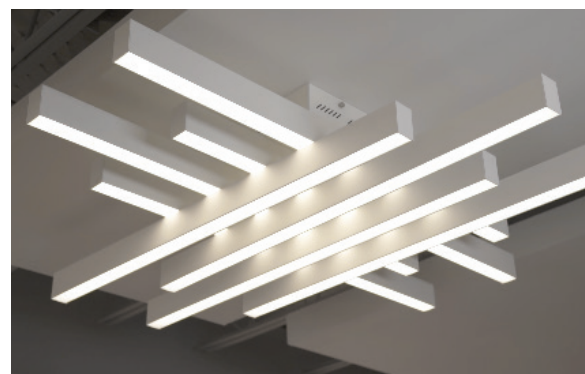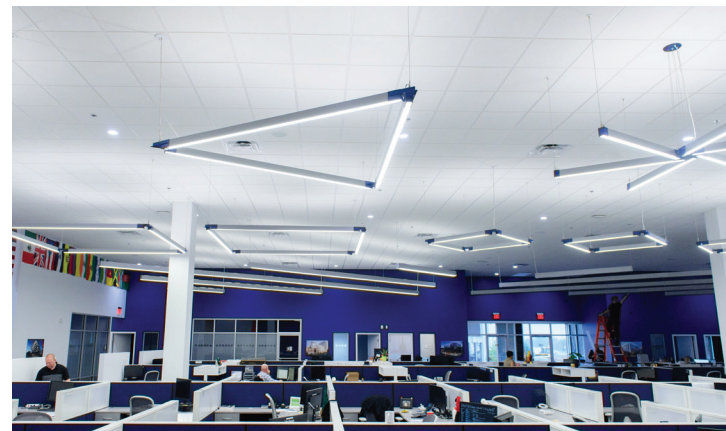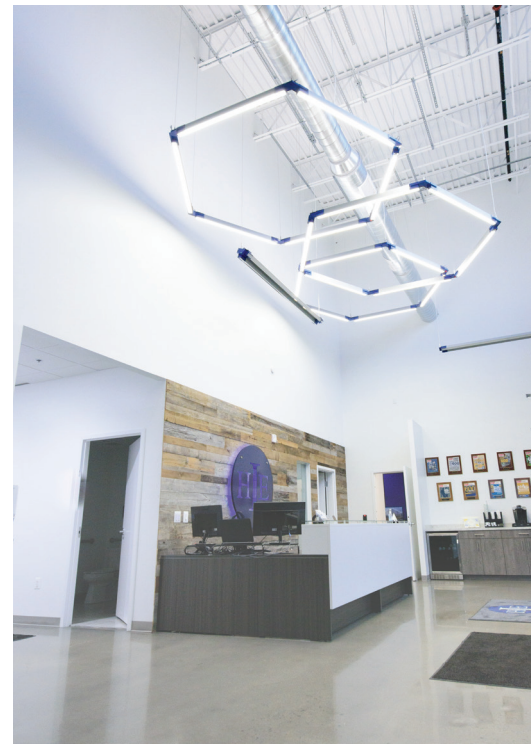



## HEX LINEAR CONNECTOR SERIES

Explore infinite design possibilities and add a unique element to your existing design by tapping into nature's strongest shape. The brand-NEW HEX Series provides opportunities to make each design space your own allowing you to make a statement with lighting! Utilize a single HEX or a 3 Light HEX individually or in a cluster design to make the perfect hanging fixture. Ideal for large circulation spaces or conference rooms.

Get 3-dimensional, statement lighting with infinite configuration possibilities. Connected in series of 1's and 3's, multiple knockouts on fixtures allow for seamless wiring between fixture sets.

ITEM NO.	DESCRIPTION
LHCPFR24DLQ40WDMVWH40K-01	24D/PENDANT/FROSTED LENS/40W, 1950L/ 0-10V DIM/40K/PENDANT UNO
LHCPFR24DLQ120WDMVWH40K-03	24D/PENDANT/FROSTED LENS/120W, 5850L/0-10V DIM/40K/PENDANT TRIO

**D1MV** **CCT1** **PEND**

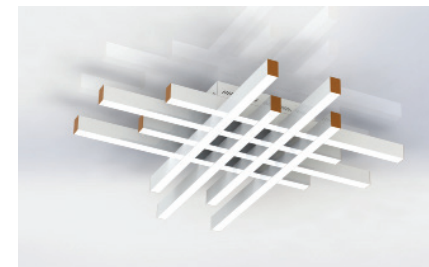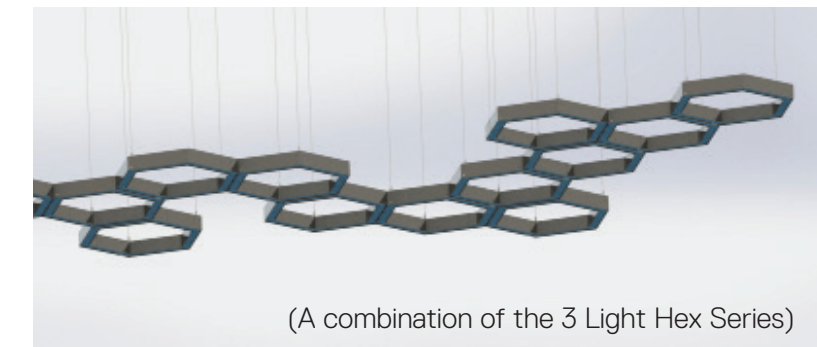

## L23H HASHTAG LUMINAIRE



The Hashtag series gives you the ability to alter your space, providing an abundance of light from a linear LED cross-fixture system. Two tiers of staggered L23 luminaires create an intriguing, contemporary look that will add beauty and sophistication to any hospitality, office, or retail space. A variety of powder coated finishes are available for both the body and end caps.

A uniquely engineered cross-fixture system featuring two tiers of staggered 2"x3" linear fixtures that creates a contemporary LED installation.

ITEM NO.	DESCRIPTION
L23HSFR58X58LQ148WDMVWH40KRD	HASHTAG SERIES/ 58.25"W x 58.25"L x 9"H/ 148W
L23HSFR58X58LQ220WDMVWH40KRD	HASHTAG SERIES/ 58.25"W x 58.25"L x 9"H/ 266W

**EM6** **G120** **OS2** **D1MV** **90CRI** **CCT1**



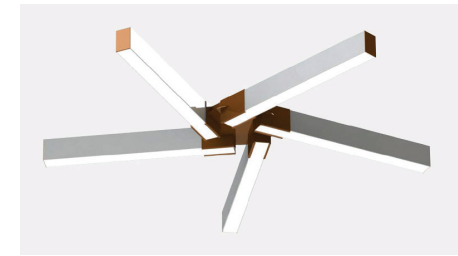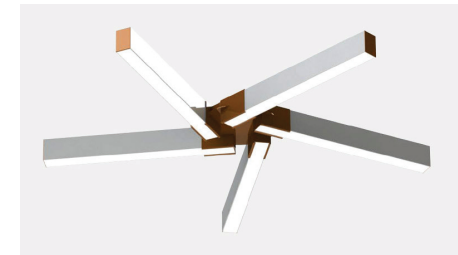

## PLY23 FAN DIRECT AND INDIRECT

The PLY23 Fan has a specially designed central bracket to create this radial, monopoint configuration using 3, 5, or 6 blades.

ITEM NO.	DESCRIPTION
PLY23PFR51LUT36WD60WDMVWH40KRD-F3	24" L23/ 51" DIA x 3.23" H/ 3 BLADE/ FAN
PLY23PFR51LUT60WD100WDMVWH40KRD-F5	24" L23/ 51" DIA x 3.23" H/ 5 BLADE/ FAN
PLY23PFR51LUT72WD120WDMVWH40KRD-F6	24" L23/ 51" DIA x 3.23" H/ 6 BLADE/ FAN
PLY23PFR99LUT72WD120WDMVWH40KRD-F3	48" L23/ 99" DIA x 3.23" H/ 3 BLADE/ FAN
PLY23PFR99LUT120WD200WDMVWH40KRD-F5	48" L23/ 99" DIA x 3.23" H/ 5 BLADE/ FAN
PLY23PFR99LUT144WD240WDMVWH40KRD-F6	48" L23/ 99" DIA x 3.23" H/ 6 BLADE/ FAN
PLY23PFR147LUT108WD180WDMVWH40KRD-F3	72" L23/ 147" DIA x 3.23" H/ 3 BLADE/ FAN
PLY23PFR147LUT180WD300WDMVWH40KRD-F5	72" L23/ 147" DIA x 3.23" H/ 5 BLADE/ FAN
PLY23PFR147LUT216WD360WDMVWH40KRD-F6	72" L23/ 147" DIA x 3.23" H/ 6 BLADE/ FAN

EM6 G120 OS2 D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.

## PLY23 FAN DIRECT ONLY


The PLY23 Fan has a specially designed central bracket to create this radial, monopoint configuration using 3, 5, or 6 blades.

ITEM NO.	DESCRIPTION
PLY23PFR99LT120WDMVWH40KRD-F3	48" L23/ 99" DIA x 3.23" H/ DOWN ONLY/ 3 BLADE/ FAN
PLY23PFR99LT200WDMVWH40KRD-F5	48" L23/ 99" DIA x 3.23" H/ DOWN ONLY/ 5 BLADE/ FAN
PLY23PFR99LT240WDMVWH40KRD-F6	48" L23/ 99" DIA x 3.23" H/ DOWN ONLY/ 6 BLADE/ FAN
PLY23PFR51LT60WDMVWH40KRD-F3	24" L23/ 51" DIA x 3.23" H/ DOWN ONLY/ 3 BLADE/ FAN
PLY23PFR51LT100WDMVWH40KRD-F5	24" L23/ 51" DIA x 3.23" H/ DOWN ONLY/ 5 BLADE/ FAN
PLY23PFR51LT120WDMVWH40KRD-F6	24" L23/ 51" DIA x 3.23" H/ DOWN ONLY/ 6 BLADE/ FAN
PLY23PFR147LT180WDMVWH40KRD-F3	72" L23/ 147" DIA x 3.23" H/ DOWN ONLY/ 3 BLADE/ FAN
PLY23PFR147LT300WDMVWH40KRD-F5	72" L23/ 147" DIA x 3.23" H/ DOWN ONLY/ 5 BLADE/ FAN
PLY23PFR147LT360WDMVWH40KRD-F6	72" L23/ 147" DIA x 3.23" H/ DOWN ONLY/ 6 BLADE/ FAN

EM6 G120 OS2 D1MV 90CRI CCT1



Hanging Kits with 5 Wire 5 Ft Included.

Most fixtures are available in a range of finishes, see page 196.

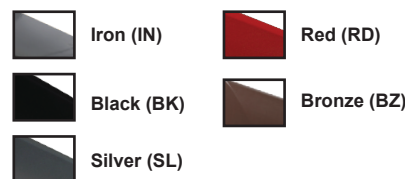

**EASY TO INSTALL, HARD TO IGNORE.**

When designing the PLY series, ease of ordering and install were of top priority. Simply order using one item number that includes everything needed for install. Assemble within minutes by following simplified installation instructions available for download at [sayliteshowcase.com](http://sayliteshowcase.com).

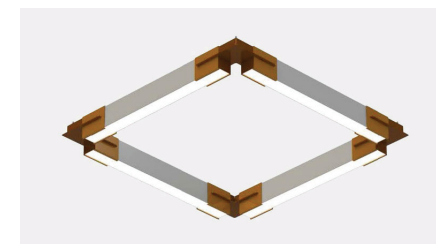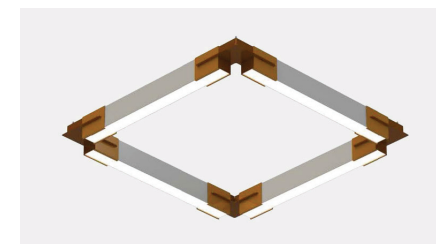

## PLY23 TRIANGLE DIRECT AND INDIRECT

The PLY23 Triangle uses 2"X3" linears and uniquely designed brackets that allow for an easy "plug and play" installation.

ITEM NO.	DESCRIPTION
PLY23PFR30X35LUT36WD60WDMVWH40KRD-TR	24" L23/ 30" W x 35" L x 3.23" H/ TRIANGLE
PLY23PFR51X59LUT72WD120WDMVWH40KRD-TR	48" L23/ 51" W x 59" L x 3.23" H/ TRIANGLE
PLY23PFR72X83LUT108WD180WDMVWH40KRD-TR	72" L23/ 72" W x 83" L x 3.23" H/ TRIANGLE
PLY23PFR93X107LUT144WD240WDMVWH40KRD-TR	96" L23/ 93" W x 107" L x 3.23" H/ TRIANGLE

EM6 G120 OS2 D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.

## PLY23 TRIANGLE DIRECT ONLY

The PLY23 Triangle uses 2"X3" linears and uniquely designed brackets that allow for an easy "plug and play" installation.

ITEM NO.	DESCRIPTION
PLY23PFR30X35LT60WDMVWH40KRD-TR	24" L23/ 30" W x 35" L x 3.23" H/ DOWN ONLY/ TRIANGLE
PLY23PFR51X59LT120WDMVWH40KRD-TR	48" L23/ 51" W x 59" L x 3.23" H/ DOWN ONLY/TRIANGLE
PLY23PFR72X83LT180WDMVWH40KRD-TR	72" L23/ 72" W x 83" L x 3.23" H/ DOWN ONLY/ TRIANGLE
PLY23PFR93X107LT240WDMVWH40KRD-TR	96" L23/ 93" W x 107" L x 3.23" H/ DOWN ONLY/TRIANGLE

EM6 G120 OS2 D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.

## PLY23 SQUARE DIRECT AND INDIRECT

The PLY23 Square uses 2"X3" linears and uniquely designed brackets that allow for an easy "plug and play" installation.

ITEM NO.	DESCRIPTION
PLY23PFR32X32LUT48WD80WDMVWH40KRD-SQ	24" L23/ 32" W x 32" L x 3.23" H/ SQUARE
PLY23PFR56X56LUT96WD160WDMVWH40KRD-SQ	48" L23/ 56" W x 56" L x 3.23" H/ SQUARE
PLY23PFR80X80LUT144WD240WDMVWH40KRD-SQ	72" L23/ 80" W x 80" L x 3.23" H/ SQUARE
PLY23PFR104X104LUT192WD320WDMVWH40KRD-SQ	96" L23/ 104" W x 104" L x 3.23" H/ SQUARE

EM6 G120 OS2 D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.

## PLY23 SQUARE DIRECT ONLY

The PLY23 Square uses 2"X3" linears and uniquely designed brackets that allow for an easy "plug and play" installation.

ITEM NO.	DESCRIPTION
PLY23PFR32X32LT80WDMVWH40KRD-SQ	24" L23/ 32" W x 32" L x 3.23" H/ DOWN ONLY/ SQUARE
PLY23PFR56X56LT160WDMVWH40KRD-SQ	48" L23/ 56" W x 56" L x 3.23" H/ DOWN ONLY/ SQUARE
PLY23PFR80X80LT240WDMVWH40KRD-SQ	72" L23/ 80" W x 80" L x 3.23" H/ DOWN ONLY/ SQUARE
PLY23PFR104X104LT320WDMVWH40KRD-SQ	96" L23/ 104" W x 104" L x 3.23" H/ DOWN ONLY/ SQUARE

EM6 G120 OS2 D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.



## PLY23 PENTAGON DIRECT AND INDIRECT

The PLY23 Pentagon uses 2”X3” linears and uniquely designed brackets that allow for an easy “plug and play” installation.

ITEM NO.	DESCRIPTION
PLY23PFR57LUT60WD100WDMVWH40KRD-PT	24" L23/ 57" DIA x 3.23" H/ PENTAGON
PLY23PFR92LUT120WD200WDMVWH40KRD-PT	48" L23/ 92" DIA x 3.23" H/ PENTAGON
PLY23PFR133LUT180WD300WDMVWH40KRD-PT	72" L23/ 133" DIA x 3.23" H/ PENTAGON
PLY23PFR174LUT400WD500WDMVWH40KRD-PT	96" L23/ 174" DIA x 3.23" H/ PENTAGON

EM6 G120 OS2 D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.

## PLY23 PENTAGON DIRECT ONLY

The PLY23 Pentagon uses 2”X3” linears and uniquely designed brackets that allow for an easy “plug and play” installation.

ITEM NO.	DESCRIPTION
PLY23PFR92LT200WDMVWH40KRD-PT	48" L23/ 92" DIA x 3.23" H/ DOWN ONLY/ PENTAGON
PLY23PFR133LT300WDMVWH40KRD-PT	72" L23/ 133" DIA x 3.23" H/ DOWN ONLY/ PENTAGON
PLY23PFR174LT500WDMVWH40KRD-PT	96" L23/ 174" DIA x 3.23" H/ DOWN ONLY/ PENTAGON

EM6 G120 OS2 D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.

## PLY23 HEXAGON DIRECT AND INDIRECT

The PLY23 Hexagon uses 2”X3” linears and uniquely designed brackets that allow for an easy “plug and play” installation.

ITEM NO.	DESCRIPTION
PLY23PFR69LUT72WD120WDMVWH40KRD-HX	24" L23/ 61" DIA x 3.23" H/ HEXAGON
PLY23PFR109LUT144WD240WDMVWH40KRD-HX	48" L23/ 109" DIA x 3.23" H/ HEXAGON
PLY23PFR157LUT180WD300WDMVWH40KRD-HX	72" L23/ 157" DIA x 3.23" H/ HEXAGON
PLY23PFR205LUT240WD400WDMVWH40KRD-HX	96" L23/ 205" DIA x 3.23" H/ HEXAGON

EM6 G120 OS2 D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.


## PLY23 HEXAGON DIRECT ONLY

The PLY23 Hexagon uses 2”X3” linears and uniquely designed brackets that allow for an easy “plug and play” installation.

ITEM NO.	DESCRIPTION
PLY23PFR69LT120WDMVWH40KRD-HX	24" L23/ 61" DIA x 3.23" H/ DOWN ONLY/ HEXAGON
PLY23PFR109LT240WDMVWH40KRD-HX	48" L23/ 109" DIA x 3.23" H/ DOWN ONLY/ HEXAGON
PLY23PFR157LT300WDMVWH40KRD-HX	72" L23/ 157" DIA x 3.23" H/ DOWN ONLY/ HEXAGON
PLY23PFR205LT400WDMVWH40KRD-HX	96" L23/ 205" DIA x 3.23" H/ DOWN ONLY/ HEXAGON

EM6 G120 OS2 D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.

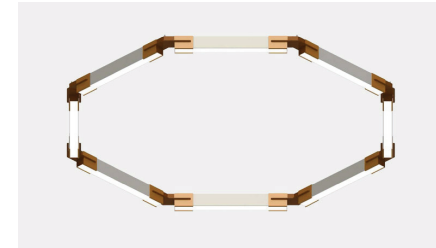

## PLY23 OCTAGON DIRECT AND INDIRECT

The PLY23 Octagon uses 2”X3” linears and uniquely designed brackets that allow for an easy “plug and play” installation.

ITEM NO.	DESCRIPTION
PLY23PFR77LUT96WD160WDMVWH40KRD-OT	24" L23/ 77" DIA x 3.23" H/ OCTAGON
PLY23PFR202LUT192WD320WDMVWH40KRD-OT	48" L23/ 202" DIA x 3.23" H/ OCTAGON
PLY23PFR223LUT288WD480WDMVWH40KRD-OT	72" L23/ 223" DIA x 3.23" H/ OCTAGON
PLY23PFR265LUT384WD640WDMVWH40KRD-OT	96" L23/ 265" DIA x 3.23" H/ OCTAGON

EM6 G120 OS2 D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.






## PLY23 OCTAGON DIRECT ONLY

The PLY23 Octagon uses 2”X3” linears and uniquely designed brackets that allow for an easy “plug and play” installation.

ITEM NO.	DESCRIPTION
PLY23PFR77LT160WDMVWH40KRD-OT	24" L23/ 77" DIA x 3.23" H/ DOWN ONLY/ OCTAGON
PLY23PFR202LT320WDMVWH40KRD-OT	48" L23/ 202" DIA x 3.23" H/ DOWN ONLY/ OCTAGON
PLY23PFR223LT480WDMVWH40KRD-OT	72" L23/ 223" DIA x 3.23" H/ DOWN ONLY/ OCTAGON
PLY23PFR265LT640WDMVWH40KRD-OT	96" L23/ 265" DIA x 3.23" H/ DOWN ONLY/ OCTAGON

EM6 G120 OS2 D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.

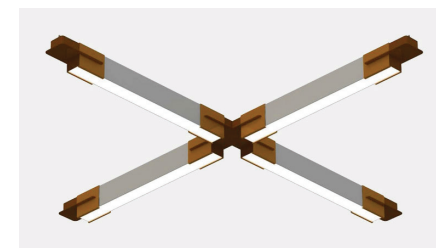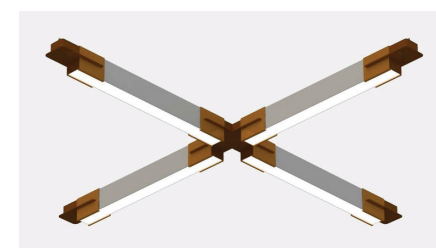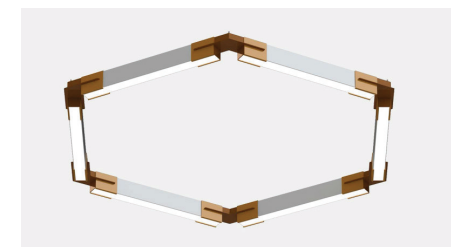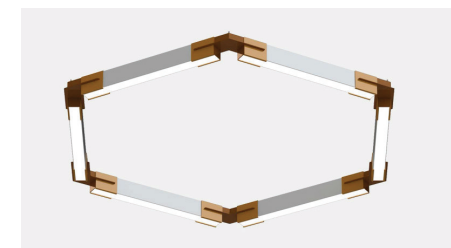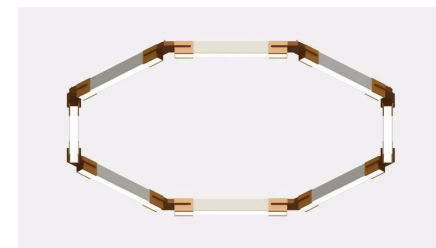

## PLY23 CROSS DIRECT AND INDIRECT

The PLY23 Cross uses 2”X3” linears and uniquely designed brackets that allow for an easy “plug and play” installation.

ITEM NO.	DESCRIPTION
PLY23PFR60X60LUT48WD80WDMVWH40KRD-CR	24" L23/ 60" W x 60" L / CROSS
PLY23PFR108X108LUT96WD160WDMVWH40KRD-CR	48" L23/ 108" W x 108" L / CROSS
PLY23PFR156X156LUT144WD240WDMVWH30KRD-CR	72" L23/ 156" W x 156" L / CROSS
PLY23PFR204X204LUT192WD320WDMVWH30KRD-CR	96" L23/ 204" W x 204" L / CROSS

EM6 G120 OS2 D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.





## PLY23 CROSS DIRECT ONLY

The PLY23 Cross uses 2”X3” linears and uniquely designed brackets that allow for an easy “plug and play” installation.

ITEM NO.	DESCRIPTION
PLY23PFR60X60LT80WDMVWH40KRD-CR	24" L23/ 60" W x 60" L / DOWN ONLY/ CROSS
PLY23PFR108X108LT160WDMVWH40KRD-CR	48" L23/ 108" W x 108" L / DOWN ONLY/ CROSS
PLY23PFR156X156LT240WDMVWH30KRD-CR	72" L23/ 156" W x 156" L / DOWN ONLY/ CROSS
PLY23PFR204X204LT320WDMVWH30KRD-CR	96" L23/ 204" W x 204" L / DOWN ONLY/ CROSS

EM6 G120 OS2 D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.



## PLY44 SQUARE DIRECT AND INDIRECT

The PLY44 Square's unique plug and play design makes for a seamless installation process using 4"x4" linears and connectors.

ITEM NO.	DESCRIPTION
PLY44SF34X34LUR56WD96WDMVWH40KRD-SQ	24" 44P/ 34" W x 34" L x 4.05"H/ SQUARE
PLY44SF58X58LUR112WD192WDMVWH40KRD-SQ	48" 44P/ 58" W x 58" L x 4.05"H/ SQUARE
PLY44SF82X82LUR168WD288WDMVWH40KRD-SQ	78" 44P/ 82" W x 82" L x 4.05"H/ SQUARE
PLY44SF108X108LUR224WD384WDMVWH40KRD-SQ	96" 44P/ 108" W x 108" L x 4.05"H/ SQUARE

EM6 G120 OS2 RGBW D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.

## PLY44 SQUARE DIRECT ONLY

The PLY44 Square's unique plug and play design makes for a seamless installation process using 4"x4" linears and connectors.

ITEM NO.	DESCRIPTION
PLY44SF34X34LR96WDMVWH40KRD-SQ	24" 44P/ 34" W x 34" L x 4.05"H/ DOWN ONLY/ SQUARE
PLY44SF58X58LR192WDMVWH40KRD-SQ	48" 44P/ 58" W x 58" L x 4.05"H/ DOWN ONLY/ SQUARE
PLY44SF82X82LR288WDMVWH40KRD-SQ	78" 44P/ 82" W x 82" L x 4.05"H/ DOWN ONLY/ SQUARE
PLY44SF108X108LR384WDMVWH40KRD-SQ	96" 44P/ 108" W x 108" L x 4.05"H/ DOWN ONLY/ SQUARE

EM6 G120 OS2 RGBW D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.

## PLY44 HEXAGON DIRECT AND INDIRECT

The PLY44 Hexagon's unique plug and play design makes for a seamless installation process using 4"x4" linears and connectors.

ITEM NO.	DESCRIPTION
PLY44SF61LUR84WD144WDMVWH40KRD-HX	24" 44P / 61" DIA/ HEXAGON
PLY44SF108LUR168WD288WDMVWH40KRD-HX	48" 44P / 108" DIA/ HEXAGON
PLY44SF156LUR252WD432WDMVWH40KRD-HX	72" 44P/ 156" DIA/ HEXAGON
PLY44SF204LUR336WD576WDMVWH40KRD-HX	96" 44P/ 204" DIA/ HEXAGON

EM6 G120 OS2 RGBW D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.

## PLY44 HEXAGON DIRECT ONLY

The PLY44 Hexagon's unique plug and play design makes for a seamless installation process using 4"x4" linears and connectors.

ITEM NO.	DESCRIPTION
PLY44SF61LRD144DMVWH40KRD-HX	24" 44P / 61" DIA/ DOWN ONLY/ HEXAGON
PLY44SF108LRD288DMVWH40KRD-HX	48" 44P / 108" DIA/ DOWN ONLY/ HEXAGON
PLY44SF156LRD432DMVWH40KRD-HX	72" 44P/ 156" DIA/ DOWN ONLY/ HEXAGON
PLY44SF204LRD576DMVWH40KRD-HX	96" 44P/ 204" DIA/ DOWN ONLY/ HEXAGON

EM6 G120 OS2 RGBW D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.



## PLY44 OCTAGON DIRECT AND INDIRECT

The PLY44 Octagon's unique plug and play design makes for a seamless installation process using 4"x4" linears and connectors.

ITEM NO.	DESCRIPTION
PLY44SF77LUR112WD192WDMVWH40KRD-OT	24" 44P / 77" DIA/ OCTAGON
PLY44SF140LUR224WD384WDMVWH40KRD-OT	48" 44P / 140" DIA/ OCTAGON
PLY44SF203LUR336WD576WDMVWH40KRD-OT	72" 44P / 203" DIA/ OCTAGON
PLY44SF265LUR448WD768WDMVWH40KRD-OT	96" 44P / 265" DIA/ OCTAGON

EM6 G120 OS2 RGBW D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.

## PLY44 OCTAGON DIRECT ONLY

The PLY44 Octagon's unique plug and play design makes for a seamless installation process using 4"x4" linears and connectors.

ITEM NO.	DESCRIPTION
PLY44SF77LR192WDMVWH40KRD-OT	24" 44P / 77" DIA/ DOWN ONLY/ OCTAGON
PLY44SF140LR384WDMVWH40KRD-OT	48" 44P / 140" DIA/ DOWN ONLY/ OCTAGON
PLY44SF203LR576WDMVWH40KRD-OT	72" 44P / 203" DIA/ DOWN ONLY/ OCTAGON
PLY44SF265LR768WDMVWH40KRD-OT	96" 44P / 265" DIA/ DOWN ONLY/ OCTAGON

EM6 G120 OS2 RGBW D1MV 90CRI CCT1

Hanging Kits with 5 Wire 5 Ft Included.



**They brew it up. We make it shine.**

**Find the right solution with a one-of-a-kind statement fixture.**

A major convenience store chain in Florida was looking to create a bold but cost-effective in-store experience by shining a light on their new coffee bar as a modern, inviting space. The installation needed to reflect the "better than convenience store" quality of their coffee.

# Architectural Flair



Lit corners

Consult for Different Configurations  
(Squares or Rectangles, Up and Downlight Versions, or Different Shapes of Lit Patterns)

## LED LINEAR PENDANT SQUARE 4" X 4", 4-FOOT AND 8-FOOT SQUARES

Create dramatic geometric lines of light in 4-foot or 8-foot squares or consult for custom lit configurations. Lit corners, shadowless LED and energy-efficient performance provide excellent general lighting. Ideal for circulation spaces, lobbies, retail and conference rooms with high ceilings, a desire for industrial feel and a compliment to the architectural style.

ITEM NO.	DESCRIPTION
44PSF4X4R96WDMV40KWH-HC4015WWH	4"x4" 4ft. Sq / 96W, 9600L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
44PSF4X4R128WDMV40KWH-HC4015WWH	4"x4" 4ft. Sq / 128W, 12800L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
44PSF8X8R192WDMV40KWH-HC4015WH	4"x4" 8ft. Sq / 192W, 19200L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
44PSF8X8R256WDMV40KWH-HC4015WWH	4"x4" 8ft. Sq / 256W, 25600L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord

EM2 G120 RGBW D1MV 90CRI CCT1 SURF

## LED LINEAR PENDANT SQUARE DIRECT/INDIRECT

The 45 Series offers all the benefits of the 44 Series but is specifically designed for direct/indirect lighting with a snap-in lens to hide the lamps or LED arrays. Ideal where downlight and uplight are required.




ITEM NO.	DESCRIPTION
45PSF4X4UR24WD96WDMV40KWHHC4015WWH	4"x5" 4ft. Sq / Up 24W, Dn 96W, 12000L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
45PSF4X4UR32WD128WDMV40KWHHC4015WWH	4"x5" 4ft. Sq / Up 32W, Dn 128W, 16000L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
45PSF8X8UR48WD192WDMV40KWHHC4015WH	4"x5" 8ft. Sq / Up 48W, Dn 192W, 24000L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord
45PSF8X8UR64WD256WDMV40KWHHC4015WWH	4"x5" 8ft. Sq / Up 64W, Dn 256W, 32000L / 0-10V Dim / 4000K / White / 4ft WH Canopy Kit with 5 Wire Cord

EM2 G120 RGBW D1MV 90CRI CCT1 NEW

## LED LINEAR PENDANT FIXED RECTANGULAR CHANNEL


Make a bold design statement with this geometric-shaped line of light. The CLLLSF4X8 is easy to specify, order, and install, making it ideal for both residential and commercial general lighting applications. This 4 x 8 foot rectangle with 2.2" wide linear channel with center lit channel is available for quick ship and economical applications to fill a large space without impairing visibility. See [www.saylite.com](http://www.saylite.com) for video on how to install.

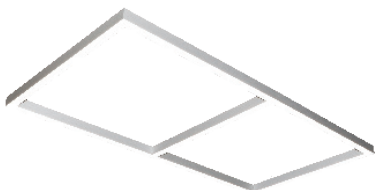

ITEM NO.	DESCRIPTION
CLLLSF4X8T210WDMV35KALHC705WH	4' x 8' / 2.2"W x 2.7"H / 210W, 21000L / 0-10V Dim / 3500K / Silver / 6ft WH Canopy Kit with 5 Wire Cord
CLLLSF4X8T210WDMV35KWHHC705WH	4' x 8' / 2.2"W x 2.7"H / 210W, 21000L / 0-10V Dim / 3500K / White / 6ft WH Canopy Kit with 5 Wire Cord
CLLLSF4X8T210WDMV40KALHC705WH	4' x 8' / 2.2"W x 2.7"H / 210W, 21000L / 0-10V Dim / 4000K / Silver / 6ft WH Canopy Kit with 5 Wire Cord
CLLLSF4X8T210WDMV40KWHHC705WH	4' x 8' / 2.2"W x 2.7"H / 210W, 21000L / 0-10V Dim / 4000K / White / 6ft WH Canopy Kit with 5 Wire Cord

CCT5

Custom Configurations Available.



See page 39 for new Hexagon fixture.

# SBC

Upgrade your lighting with the luminous and redefining SBC series. This fixture features an ultra-thin face for a virtually frameless appearance. Engineered stretch glow fabric produces a soft glow, while specially designed LED strips provide bright, white and energy efficient illumination. Six standard sizes and three mounting options are available. Utilize multiple fixtures for a dramatic display or use as custom signage by printing artwork directly onto the fabric.



## SBC LED SHADOW BOX

This fixture features an ultra-thin face for a virtually frameless appearance. Engineered stretch glow fabric produces an even, soft glow for a cloud-like appearance.



ITEM NO.	DESCRIPTION
SBCSM9X9LP10DMVWH40	SBC/ 9"W x9"L/ 10W/ SURFACE
SBCSM12X12LP12DMVWH40	SBC/ 12"W x12"L/ 12W/ SURFACE
SBCSM20X20LP18DMVWH40	SBC/ 20"W x20"L/ 18W/ SURFACE
SBCSM24X24LP22DMVWH40	SBC/ 24"W x24"L/ 22W/SURFACE
SBCSM24X48LP44DMVWH40	SBC/ 24"W x48"L/ 44W/ SURFACE
SBCSM48X48LP88DMVWH40	SBC/ 48"W x48"L/ 88W/SURFACE

EM7 G120 D1MV CCT1 PEND

For pendant mount change SM to P. Pendant kit includes cable kit.



For the Icon Legend, see pages 92-93. Item numbers highlighted in gray are DLC Listed.

# Surface Mount

Saylite has a wide selection of surface-mounted LED fixtures for every application, and many are companion fixtures to our extensive recessed and pendant-mounted fixtures. An extensive selection of linear channels are available from less than 1 inch wide to more than 6 inches wide (See Linear Pendant Section). From Flat Panels to wraparounds, to specialty corridor and wall wash fixtures, to low profile “clouds”, there is a fixture for every lighting design and every application. Each surface mount is available in a variety of sizes, wattages and lumen outputs. Choose the color temperature and fixture color that works for the application. Consult our “Factory at Your Fingertips” if you don’t see what you need.



## LED SURFACE PREMIUM LOW-PROFILE WELDED FLAT PANEL

This sleek, ultra-thin, LED flat panel is only 2.5” in height and available in three sizes housed in low profile welded steel frame. Ideal for offices, circulation spaces, retail, and residential kitchens where a “skylight” appearance is desired.

ITEM NO.	DESCRIPTION
SHPFPPELP22LED40DMVWH40	2x2 / 40W, 5000L / 0-10V Dim / 4000K
SHPFPPELP14LED40DMVWH40	1x4 / 40W, 5000L / 0-10V Dim / 4000K
SHPFPPELP24LED50DMVWH40	2x4 / 50W, 6250L / 0-10V Dim / 4000K

EM3 CCT2 REC

## SLOTTED LOW PROFILE LED LINEAR

The shallow, spec-grade SLP offers clean rectilinear lines, ideal for commercial or residential general lighting and for circulation spaces, high impact areas, kitchen islands, and offices.

ITEM NO.	DESCRIPTION
SLFFR48LY24W2700LDMV40KWH	48"L x 7.70"W x 2"H / Frosted Lens / 24W, 2700L / 0-10V Dim / 4000K / White
SLFFR48LY48W5400LDMV40KWH	48"L x 7.70"W x 2"H / Frosted Lens / 48W, 5400L / 0-10V Dim / 4000K / White
SLFFR96LY48W5400LDMV40KWH	96"L x 7.70"W x 2"H / Frosted Lens / 48W, 5400L / 0-10V Dim / 4000K / White
SLFFR96LY96W10800LDMV40KWH	96"L x 7.70"W x 2"H / Frosted Lens / 96W, 10800L / 0-10V Dim / 4000K / White

EM6 G120 OS2 RGBW D1MV 90CRI CCT1 PEND WALL X1LEDT5 FLUORT5

Special size EM.

## Center Basket

Low profile, center-lensed fixture offers a “skylight” appearance with a linear ribbed lens designed to maximize efficiency and minimize glare. See matching recessed version on page 12.



ITEM NO.	DESCRIPTION
SHUCLL14LY20W2800LDMV40K	1x4 / 20W, 2800L / 0-10V Dim / 4000K
SHUCLL14LY33W4550LDMV40K	1x4 / 33W, 4550L / 0-10V Dim / 4000K
SHUCLL22LY20W2700LDMV40K	2x2 / 20W, 2700L / 0-10V Dim / 4000K
SHUCLL22LY25W3325LDMV40K	2x2 / 25W, 3325L / 0-10V Dim / 4000K
SHUCLL22LY33W4275LDMV40K	2x2 / 33W, 4275L / 0-10V Dim / 4000K
SHUCLL24LY25W3800LDMV40K	2x4 / 25W, 3800L / 0-10V Dim / 4000K
SHUCLL24LY40W5950LDMV40K	2x4 / 40W, 5950L / 0-10V Dim / 4000K
SHUCLL24LY54W7700LDMV40K	2x4 / 54W, 7700L / 0-10V Dim / 4000K

EM4 G120 OS1 D1MV 90CRI CCT1 SURF X1LED FLUOR

For all Center Basket or Dual Basket Surface, see page 12 & 13.



## LED SURFACE TROFFER WITH WELDED SEAMLESS BODY

This spec-grade, low-profile troffer with welded seamless body provides almost limitless flexibility where surface mounting is required. Ideal for all commercial and industrial buildings.


ITEM NO.	DESCRIPTION
153A22LY20W2700LDMV40K	24"L x 24"W x 3.75"H / 20W, 2700L / 0-10V Dim / 4000K
153A22LY25W3300LDMV40K	24"L x 24"W x 3.75"H / 25W, 3300L / 0-10V Dim / 4000K
153A22LY33W4250LDMV40K	24"L x 24"W x 3.75"H / 33W, 4250L / 0-10V Dim / 4000K
153A14LY30W4350LDMV40K	48"L x 12"W x 3.75"H / 30W, 4350L / 0-10V Dim / 4000K
153A14LY45W6100LDMV40K	48"L x 12"W x 3.75"H / 45W, 6100L / 0-10V Dim / 4000K
153A24LY30W4750LDMV40K	48"L x 24"W x 3.75"H / 30W, 4750L / 0-10V Dim / 4000K
153A24LY45W6750LDMV40K	48"L x 24"W x 3.75"H / 45W, 6750L / 0-10V Dim / 4000K
153A24LY54W7700LDMV40K	48"L x 24"W x 3.75"H / 54W, 7700L / 0-10V Dim / 4000K

EM7 G120 OS1 RGBW D1MV 90CRI CCT1 REC X1LED FLUOR

Dress up with higher efficient Frosted Lens made special for LED. Replace “A” with “FR”.



# Surface Mount



## LED ENGINEERED HEAVY-DUTY WRAPAROUND WITH SOLID ENDS

This industrial grade wrap is ideal for individual or continuous runs with solid ends for demanding applications. This high efficiency luminaire delivers excellent brightness control, featuring a high-performance clear acrylic lens.

ITEM NO.	DESCRIPTION
EWPLR48LY32W4200LDMV40K	48.0"L x 9.56"W x 3.19"H / 32W, 4200L / 0-10V Dim / 4000K
EWPLR48LY48W5800LDMV40K	48.0"L x 9.56"W x 3.19"H / 48W, 5800L / 0-10V Dim / 4000K
EWPLR48LY72W8700LDMV40K	48.0"L x 9.56"W x 3.19"H / 72W, 8700L / 0-10V Dim / 4000K
EWPLR96LY48W5800LDMV40K	96.0"L x 9.56"W x 3.19"H / 48W, 5800L / 0-10V Dim / 4000K
EWPLR96LY65W8400LDMV40K	96.0"L x 9.56"W x 3.19"H / 65W, 8400L / 0-10V Dim / 4000K
EWPLR96LY97W11600LDMV40K	96.0"L x 9.56"W x 3.19"H / 97W, 11600L / 0-10V Dim / 4000K

EM2 G120 OS2 RGBW D1MV 90CRI CCT1 X1LED FLUOR

## LED LINEAR WALL WASH

Lit walls expand the space and draw the eye. This architectural linear wall wash solution does it in a sleek, inconspicuous form factor. Ideal for lobbies, circulation spaces, and office environments. Available in two-, four-, and eight- foot lengths, individual or group patterns with asymmetrical light output.



ITEM NO.	DESCRIPTION
W4ASSF48LR24W2400LDMV40KWH	48"L x 4"W x 4"H / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K
W4ASSF48LR48W4800LDMV40KWH	48"L x 4"W x 4"H / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K
W4ASSF96LR48W4800LDMV40KWH	96"L x 4"W x 4"H / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K
W4ASSF96LR96W9600LDMV40KWH	96"L x 4"W x 4"H / Frosted Lens / 96W, 9600L / 0-10V Dim / 4000K

EM1 G120 OS1 RGBW D1MV 90CRI CCT1

## LED SURFACE VANDAL-PROOF

Ideal for locker rooms, or any high-abuse, vandal-prone application. Suitable for damp location, five-year warranty. This heavy duty steel welded body will withstand a celebration after a big win or a devastating defeat.



ITEM NO.	DESCRIPTION
LRSFR24LY25W2800LDMV40KWH	24"L x 12"W x 6"H / Frosted Lens / 25W, 2800L / 0-10V Dim / 4000K / White
LRSFR48LY50W5600LDMV40KWH	48"L x 12"W x 6"H / Frosted Lens / 50W, 5600L / 0-10V Dim / 4000K / White

EM3 G120 RGBW D1MV 90CRI CCT1

Available with Clear Lens change FR to CL.



## NARROW WRAPAROUND

This slim designed LED wrap is feature right with multi-wattage and color temperature.

ITEM NO.	DESCRIPTION
WRP48L30M3800MDMVMCT	47"L x 5.9"W x 3.3"H / Frosted Lens / 15W, 30W or 41W / 126 Lumens per watt

## LED SPEC-GRADE WIDE WRAPAROUND

All the benefits of a wraparound, but with a sleek low profile, comfortable brightness values, an upright component, and the flexibility of two-, four-, and eight-foot lengths. This spec-grade fixture is ideal for schools, stores, and offices.



8 FT Size Available




ITEM NO.	DESCRIPTION
200A224LY25WDMV40K	24"L x 11.25"W x 3.4"H / Acrylic Lens / 28W, 3300L / 0-10V Dim / 4000K
200A224LY33WDMV40K	24"L x 11.25"W x 3.4"H / Acrylic Lens / 33W, 4250L / 0-10V Dim / 4000K
200A248LY35WDMV40K	48"L x 11.25"W x 3.4"H / Acrylic Lens / 35W, 5650L / 0-10V Dim / 4000K
200A248LY45WDMV40K	48"L x 11.25"W x 3.4"H / Acrylic Lens / 45W, 7100L / 0-10V Dim / 4000K
200A248LY54WDMV40K	48"L x 11.25"W x 3.4"H / Acrylic Lens / 54W, 8250L / 0-10V Dim / 4000K
200A296LY70WDMV40K	96"L x 11.25"W x 3.4"H / Acrylic Lens / 70W, 11300L / 0-10V Dim / 4000K
200A296LY90WDMV40K	96"L x 11.25"W x 3.4"H / Acrylic Lens / 90W, 14200L / 0-10V Dim / 4000K

EM3 G120 OS1 RGBW D1MV 90CRI CCT1 X1LED FLUOR

## LED LOW-PROFILE 9" ECONOMY WRAPAROUND

This 9" wide, low-profile, low cost, maintenance-free fixture delivers high efficiency and brightness control in either two- or four-foot lengths.

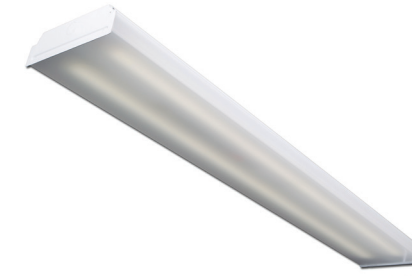

For XLED version, see page 51.

ITEM NO.	DESCRIPTION
209A24LY20WDMV40K	24"L x 9.375"W x 3"H / Acrylic Lens / 20W, 2700L / 0-10V Dim / 4000K
209A24LY33WDMV40K	24"L x 9.375"W x 3"H / Acrylic Lens / 33W, 4250L / 0-10V Dim / 4000K
209A48LY35WDMV40K	48"L x 9.375"W x 3"H / Acrylic Lens / 35W, 5650L / 0-10V Dim / 4000K
209A48LY45WDMV40K	48"L x 9.375"W x 3"H / Acrylic Lens / 45W, 7100L / 0-10V Dim / 4000K
209FR48LY48W5700LDMV40K	48"L x 9.375"W x 3"H / Frosted Lens / 48W, 5700L / 0-10V Dim / 4000K
209FR48LY57W6700LDMV40K	48"L x 9.375"W x 3"H / Frosted Lens / 57W, 6700L / 0-10V Dim / 4000K

EM3 G120 OS1 RGBW D1MV 90CRI CCT1 X1LED FLUOR

See specification sheet for more DLC item options.

## LED LOW-PROFILE 7" OR 13" ECONOMY WRAPAROUND

This 7" wide, low-profile, low initial cost, maintenance-free fixture delivers high efficiency in either 2FT or 4FT lengths and two widths for multiple lumen packages.



Consult for 8ft. LED Wrap.



ITEM NO.	DESCRIPTION
207A224LY20WDMV40K	24"L x 7.625"W x 3"H / Frosted Lens / 20W, 2700L / 0-10V Dim / 4000K
207A224LY25WDMV40K	24"L x 7.625"W x 3"H / Frosted Lens / 25W, 3300L / 0-10V Dim / 4000K
207A248LY25WDMV40K	48"L x 7.625"W x 3"H / Frosted Lens / 25W, 4100L / 0-10V Dim / 4000K
207A248LY35WDMV40K	48"L x 7.625"W x 3"H / Frosted Lens / 35W, 5650L / 0-10V Dim / 4000K
207A248LY50WDMV40K	48"L x 7.625"W x 3"H / Frosted Lens / 50W, 7800L / 0-10V Dim / 4000K
207FR448LY65W8100LDMV40K	48"L x 13"W x 3"H / Frosted Lens / 65W, 8100L / 0-10V Dim / 4000K
207FR448LY97W11200LDMV40K	48"L x 13"W x 3"H / Frosted Lens / 97W, 11200L / 0-10V Dim / 4000K

EM3 G120 OS1 RGBW D1MV 90CRI CCT1 X1LED FLUOR

For the Icon Legend, see pages 92-93. Item numbers highlighted in gray are DLC Listed.

# Surface Mount



Available in 6 different end caps.

## LED SURFACE ROUNDED SILHOUETTE

The softly rounded Eclipse profile adds a pleasant architectural element to any commercial environment. Featuring a choice of decorative end cap finishes, both luminous and opaque, to coordinate with the most popular interior finishes.

ITEM NO.	DESCRIPTION
ECLMW224LY24W2000DMV40KWH	25.75"L x 9.5"W x 4.5"H / Matte White Lens / 24W, 2000L / 0-10V Dim / 4000K / WH End Caps
ECLMW224LY36W2900LDMV40KWH	25.75"L x 9.5"W x 4.5"H / Matte White Lens / 36W, 2900L / 0-10V Dim / 4000K / WH End Caps
ECLMW248LY32W2900LDMV40KWH	51.25"L x 9.5"W x 4.5"H / Matte White Lens / 32W, 2900L / 0-10V Dim / 4000K / WH End Caps
ECLMW248LY48W4000LDMV40KWH	51.25"L x 9.5"W x 4.5"H / Matte White Lens / 48W, 4000L / 0-10V Dim / 4000K / WH End Caps
ECLMW248LY57W4500LDMV40KWH	51.25"L x 9.5"W x 4.5"H / Matte White Lens / 57W, 4500L / 0-10V Dim / 4000K / WH End Caps
ECLMW424LY48W4000LDMV40KWH	25.75"L x 16.5"W x 4.5"H / Matte White Lens / 48W, 4000L / 0-10V Dim / 4000K / WH End Caps
ECLMW448LY96W8000LDMV40KWH	51.25"L x 16.5"W x 4.5"H / Matte White Lens / 96W, 8000L / 0-10V Dim / 4000K / WH End Caps

EM3 G120 OS3 RGBW D1MV 90CRI CCT1 X1LED FLUOR

Finishes for End Caps: SL-Silver, BM-Black Marble, TO- Tortoise, IM-Ivory, WM-White Marble, WH-White

## LED SURFACE SPILL RING

Brushed nickel end caps and white bull-nosed diffuser add deco contemporary style for any commercial or residential application.



ITEM NO.	DESCRIPTION
FL48L45W3700LMVSNMCT	48.25"L *11.5"W*4.5"H / 45W, 3700L / 120-277V / Available in 3000K, 3500K or 4000K / Satin Nickel Spill Ring / No Dim
FL48LY57W5400LDMV40KSN	48.25"L x 11.5"W x 4.5"H / 57W, 5400L / 0-10V Dim / 4000K / Satin Nickel Spill Ring

EM3 G120 OS3 RGBW 90CRI CCT1 X1LED FLUOR

Consult for Bronze. Consult for 24 inches.

## LED SURFACE CLOUD

A shallow, contemporary opal acrylic diffuser softly and evenly distributes light at comfortable levels. Specify this fixture for a "puff" of light in discriminating homes or offices.




ITEM NO.	DESCRIPTION
PUF22LY24W1800LDMV40K	26.5"L x 26.5"W x 6"H / Matte White Lens / 24W, 1800L / 0-10V Dim / 4000K
PUF22LY36W2900LDMV40K	26.5"L x 26.5"W x 6"H / Matte White Lens / 36W, 2900L / 0-10V Dim / 4000K
PUF248LY32W2600LDMV40K	50.5"L x 11.75"W x 6"H / Matte White Lens / 32W, 2600L / 0-10V Dim / 4000K
PUF248LY48W3500LDMV40K	50.5"L x 11.75"W x 6"H / Matte White Lens / 48W, 3500L / 0-10V Dim / 4000K
PUF248LY57W4200LDMV40K	50.5"L x 11.75"W x 6"H / Matte White Lens / 57W, 4200L / 0-10V Dim / 4000K
PUF248LY72W5400LDMV40K	50.5"L x 11.75"W x 6"H / Matte White Lens / 72W, 5400L / 0-10V Dim / 4000K
PUF424LY32W2600LDMV40K	26.5"L x 17"W x 6"H / Matte White Lens / 32W, 2600L / 0-10V Dim / 4000K
PUF424LY48W3500LDMV40K	26.5"L x 17"W x 6"H / Matte White Lens / 48W, 3500L / 0-10V Dim / 4000K
PUF448LY65W5200LDMV40K	50.5"L x 17"W x 6"H / Matte White Lens / 65W, 5200L / 0-10V Dim / 4000K
PUF448LY97W7000LDMV40K	50.5"L x 17"W x 6"H / Matte White Lens / 97W, 7000L / 0-10V Dim / 4000K
PUF448LY114W8400LDMV40K	50.5"L x 17"W x 6"H / Matte White Lens / 114W, 8400L / 0-10V Dim / 4000K

EM6 G120 OS3 RGBW D1MV 90CRI CCT1 X1LED FLUOR

Consult for full size 2x4 version.

# X1LED

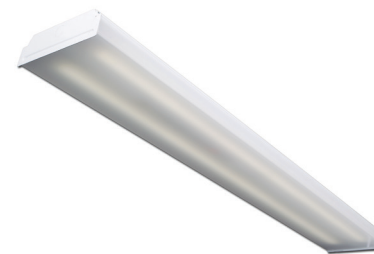

## ECLIPSE

ITEM NO.	DESCRIPTION
ECLMW217X1WHLN15W40K (TO, BM, IM, SI, WM)	9"x24" 3400 Lumen w/2x15W LED T8 4000K Lamps Included
ECLMW232X1WHLN18W40K (TO, BM, IM, SI, WM)	9"x48" 4200 Lumen w/2x18W LED T8 4000K Lamps Included
ECLMW417X1WHLN15W40K (TO, BM, IM, SI, WM)	17"x24" 6800 Lumen w/4x15W LED T8 4000K Lamps Included
ECLMW432X1WHLN18W40K (TO, BM, IM, SI, WM)	17"x48" 8400 Lumen w/4x18W LED T8 4000K Lamps Included

EM9 OS3 CCT2 REC LED FLUOR X1LEDT8D

## PUF SURFACE LINEAR

ITEM NO.	DESCRIPTION
PUF23211X1LN18W40K	11x48 inches 4200 Lumen w/2x18W LED T8 4000K Lamps Included
PUF41717X1LN15W40K	17x24 inches 6800 Lumen w/4x15W LED T8 4000K Lamps Included
PUF43217X1LN18W40K	17x48 inches 8400 Lumen w/4x18W LED T8 4000K Lamps Included

EM8 OS3 CCT2 REC WALL LED FLUOR X1LEDT8D

## WRAPAROUND 7"

ITEM NO.	DESCRIPTION
207A217X1LN15W40	7" x 24" 3400 Lumen 2 Light Wraparound w/2x15W LED T8 4000K Lamps Included
207A232X1LN18W40	7" x 48" 4200 Lumen 2 Light Wraparound w/2x18W LED T8 4000K Lamps Included
207A332X1LN18W40	13" x 48" 6300 Lumen 3 Light Wraparound w/3x18W LED T8 4000K Lamps Included
207A432X1LN18W40	13" x 48" 8400 Lumen 4 Light Wraparound w/4x18W LED T8 4000K Lamps Included

## WRAPAROUND 9"

ITEM NO.	DESCRIPTION
209A232X1LN18W40	9" x 48" 4200 Lumen 2 Light Wraparound w/2x18W LED T8 4000K Lamps Included

EM9 OS3 CCT2 LED FLUOR X1LEDT8D

## WRAPAROUND SPECIFICATION GRADE

ITEM NO.	DESCRIPTION
200A217X1LN15W40	11" x 24" 3400 Lumen 2 Light Wraparound w/2x15W LED T8 4000K Lamps Included
200A232X1LN18W40	11" x 48" 4200 Lumen 2 Light Wraparound w/2x18W LED T8 4000K Lamps Included
200A2328X1LN18W40	11" x 96" 8400 Lumen 4 Light Wraparound w/4x18W LED T8 4000K Lamps Included
200A432X1LN18W40	16" x 48" 8400 Lumen 4 Light Wraparound w/4x18W LED T8 4000K Lamps Included
200A4328X1LN18W40	16" x 96" 16800 Lumen 8 Light Wraparound w/8x18W LED T8 4000K Lamps Included

EM9 OS3 CCT2 LED FLUOR X1LEDT8D

**SURFACE TROFFER**

ITEM NO.	DESCRIPTION
153A23212X1LN18W40	1x4 4200 Lumen Troffer w/2x18W LED T8 4000K Lamps Included
153A217X1LN18W40	2x2 3400 Lumen Troffer w/2x15W LED T8 4000K Lamps Included
153A317X1LN18W40	2x2 5100 Lumen Troffer w/3x15W LED T8 4000K Lamps Included
153A417X1LN18W40	2x2 6800 Lumen Troffer w/4x15W LED T8 4000K Lamps Included
153A232X1LN18W40	2x4 4200 Lumen Troffer w/2x18W LED T8 4000K Lamps Included
153A332X1LN18W40	2x4 6300 Lumen Troffer w/31x18W LED T8 4000K Lamps Included
153A432X1LN18W40	2x4 8400 Lumen Troffer w/4x18W LED T8 4000K Lamps Included

EM8 OS5 CCT2 REC LED FLUOR X1LEDT8D

For Frosted Lens change A to FR.

**SURFACE CENTER BASKET**

ITEM NO.	DESCRIPTION
SHUCPF23212X1LN18W40	1x4 4200 Lumen Center Basket w/2x18W LED T8 4000K Lamps Included
SHUCPF217X1LN18W40	2x2 3400 Lumen Center Basket w/2x15W LED T8 4000K Lamps Included
SHUCPF317X1LN18W40	2x2 5100 Lumen Center Basket w/3x15W LED T8 4000K Lamps Included
SHUCPF232X1LN18W40	2x4 4200 Lumen Center Basket w/2x18W LED T8 4000K Lamps Included
SHUCPF332X1LN18W40	2x4 6300 Lumen Center Basket w/3x18W LED T8 4000K Lamps Included

EM8 OS5 CCT2 REC LED FLUOR X1LEDT8D

Change PF to LL for Linear Ribbed Lens

**Consult for Wired for LED T8 Lamps with Lamps Sold Separately**

**SURFACE DUAL BASKET**

ITEM NO.	DESCRIPTION
SHUDPF217X1LN15W40	2x2 3400 Lumen Dual Basket w/2x15W LED T8 4000K Lamps Included
SHUDPF232X1LN18W40	2x4 4200 Lumen Dual Basket w/2x18W LED T8 4000K Lamps Included

EM8 OS5 CCT2 REC LED FLUOR X1LEDT8D

Change PF to LL for Linear Ribbed Lens



For Large Quantities, Call For Quote

# Linear Wall

Saylite offers a full palette of complementary wall fixtures for every application, in 2", 2.5", 4", and 6" wide profiles. Whether the plan calls for a sleek architectural form or a linear strip, we manufacture it to your specifications.



**CURVED BED LIGHT DIRECT/INDIRECT**

Unique curved shaped, modern designed bed light with direct/indirect separate control. Ideal for medical examination, relaxation or for reading and other tasks. Choose finishes and switching.

ITEM NO.	DESCRIPTION
CB6FR41LPU18WD18DMVWH40K	41.08L X 4.750W X 5.66H/ Frosted Lens/18W Up/Down, 680L/0-10V Dim/ 4000K

For separately switching, add 11 after DMV. For 4 way pull chain, add PC4. Available In Silver(SL) and Black(BK). Consult for different size options.

**BED LIGHT DIRECT/INDIRECT**

A sleek light provides both great light to read and functional light for an exam as well as softer indirect light for comfort and relaxation. Available with dual control options for wall or pull chain.

ITEM NO.	DESCRIPTION
STWFR24LY13W1300LDMV40K	24"L x 5.60"W x 4.58"H / Frosted Lens / 13W, 1300L / 0-10V Dim / 4000K / White
STWFR24LY23W2300LDMV40K	24"L x 5.60"W x 4.58"H / Frosted Lens / 23W, 2300L / 0-10V Dim / 4000K / White
STWFR48LY26W2600LDMV40K	48"L x 5.60"W x 4.58"H / Frosted Lens / 26W, 2600L / 0-10V Dim / 4000K / White
STWFR48LY45W4500LDMV40K	48"L x 5.60"W x 4.58"H / Frosted Lens / 45W, 4500L / 0-10V Dim / 4000K / White
STWFR24LUY12WD24WDMV40K	24"L x 5.60"W x 4.58"H / Frosted Lens / Up 12W, Dn 24W, 3600L / 0-10V Dim / 4000K / White
STWFR48LUY24WD48WDMV40K	48"L x 5.60"W x 4.58"H / Frosted Lens / Up 24W, Dn 48W, 7200L / 0-10V Dim / 4000K / White


EM6 G120 OS4 RGBW D1MV 90CRI CCT1

For separately switching, add 11 after DMV. For 4 way pull chain, add PC4.

# Linear Wall



See Matching Pendants on page 54.



Mounting brackets allows easy installation and floating look.

Ordering is for Direct lighting. For Indirect Lighting Add U after the "L" after the length.



## WALL LINEAR 2" X 3.5" DIRECT ONLY OR INDIRECT ONLY

Our signature micro pendant (2" wide, Direct or Indirect only) is suitable for modern corridors, lobbies and offices and can be installed individually or in continuous run. Snap-in lens hides LED arrays and provides excellent glare control. Consult for custom sizes or configured in patterns.

ITEM NO.	DESCRIPTION
L23WSF24LT13W1300LDMV40KWH	24"L x 2"W x 3"H / Frosted Lens / 13W, 1300L / 0-10V Dim / 4000K / White / Wall Mount Bracket
L23WSF24LT19W1900LDMV40KWH	24"L x 2"W x 3"H / Frosted Lens / 19W, 1900L / 0-10V Dim / 4000K / White / Wall Mount Bracket
L23WSF24LT23W2300LDMV40KWH	24"L x 2"W x 3"H / Frosted Lens / 23W, 2300L / 0-10V Dim / 4000K / White / Wall Mount Bracket
L23WSF48LT26W2600LDMV40KWH	48"L x 2"W x 3"H / Frosted Lens / 26W, 2600L / 0-10V Dim / 4000K / White / Wall Mount Bracket
L23WSF48LT38W3800LDMV40KWH	48"L x 2"W x 3"H / Frosted Lens / 38W, 3800L / 0-10V Dim / 4000K / White / Wall Mount Bracket
L23WSF48LT45W4500LDMV40KWH	48"L x 2"W x 3"H / Frosted Lens / 45W, 4500L / 0-10V Dim / 4000K / White / Wall Mount Bracket
L23WSF96LT52W5200LDMV40KWH	96"L x 2"W x 3"H / Frosted Lens / 52W, 5200L / 0-10V Dim / 4000K / White / Wall Mount Bracket
L23WSF96LT76W7600LDMV40KWH	96"L x 2"W x 3"H / Frosted Lens / 76W, 7600L / 0-10V Dim / 4000K / White / Wall Mount Bracket
L23WSF96LT90W9000LDMV40KWH	96"L x 2"W x 3"H / Frosted Lens / 90W, 9000L / 0-10V Dim / 4000K / White / Wall Mount Bracket

EM3 G120 OS2 D1MV 90CRI CCT1 SURF PEND REC

## WALL LINEAR 2" X 3.5" DIRECT/INDIRECT

Our signature micro pendant (2" wide, Uplight and Downlight) is suitable for modern corridors, lobbies and offices and can be installed individually or in continuous run. Snap-in lens hides LED arrays and provides excellent glare control.

ITEM NO.	DESCRIPTION
L23WSF24LUV6WDT12WDMV40KWH	24"L x 2"W x 3"H / Frosted Lens / Up 6W, Dn 12W, 1800L / 0-10V Dim / 4000K / White / Wall Mount Bracket
L23WSF24LUV9WDT18WDMV40KWH	24"L x 2"W x 3"H / Frosted Lens / Up 9W, Dn 18W, 2700L / 0-10V Dim / 4000K / White / Wall Mount Bracket
L23WSF48LUV12WDT24WDMV40KWH	48"L x 2"W x 3"H / Frosted Lens / Up 12W, Dn 24W, 3600L / 0-10V Dim / 4000K / White / Wall Mount Bracket
L23WSF48LUV18WDT36WDMV40KWH	48"L x 2"W x 3"H / Frosted Lens / Up 18W, Dn 36W, 5400L / 0-10V Dim / 4000K / White / Wall Mount Bracket
L23WSF96LUV24WDT48WDMV40KWH	96"L x 2"W x 3"H / Frosted Lens / Up 24W, Dn 48W, 7200L / 0-10V Dim / 4000K / White / Wall Mount Bracket
L23WSF96LUV36WDT72WDMV40KWH	96"L x 2"W x 3"H / Frosted Lens / Up 36W, Dn 72W, 10800L / 0-10V Dim / 4000K / White / Wall Mount Bracket

EM3 G120 OS2 D1MV 90CRI CCT1 SURF PEND REC



## WALL LED LINEAR 4" X 4" DIRECT OR INDIRECT ONLY

The 4" x 4" steel profile provides a bold architectural look used individually or in continuous lengths to provide comfortable, bright general lighting. Snap fit frosted lens hides the LED arrays and provides excellent glare control. Easy to join, and easy to install. Available in standard sizes, outputs and finishes with a vast array of custom options.

ITEM NO.	DESCRIPTION
<b>Direct</b>	
44WSF48LR24W2400LDMV40KWH	48"L x 4"W x 4"H / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K / White
44WSF48LR48W4800LDMV40KWH	48"L x 4"W x 4"H / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K / White
44WSF96LR48W4800LDMV40KWH	96"L x 4"W x 4"H / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K / White
44WSF96LR96W9600LDMV40KWH	96"L x 4"W x 4"H / Frosted Lens / 96W, 9600L / 0-10V Dim / 4000K / White

EM6 G120 OS2 RGBW D1MV 90CRI CCT1 SURF PEND REC X1LED FLUOR

## WALL LED LINEAR 4" X 4" DIRECT/INDIRECT ONLY

The 4" x 4" steel profile provides a bold architectural look used individually or in continuous lengths to provide comfortable, bright general lighting. Snap fit frosted lens hides the LED arrays and provides excellent glare control. Easy to join, and easy to install. Available in standard sizes, outputs and finishes with a vast array of custom options.

ITEM NO.	DESCRIPTION
<b>Direct</b>	
44WSF48LUR12WD24WDMV40KWH	48"L x 4"W x 4"H / Frosted Lens / Up 12W, Dn 24W, 3600L / 0-10V Dim / 4000K / White
44WSF48LUR18WD36WDMV40KWH	48"L x 4"W x 4"H / Frosted Lens / Up 18W, Dn 36W, 5400L / 0-10V Dim / 4000K / White
44WSF96LUR24WD48WDMV40KWH	96"L x 4"W x 4"H / Frosted Lens / Up 24W, Dn 48W, 7200L / 0-10V Dim / 4000K / White
44WSF96LUR36WD72WDMV40KWH	96"L x 4"W x 4"H / Frosted Lens / Up 36W, Dn 72W, 10800L / 0-10V Dim / 4000K / White

EM6 G120 OS2 RGBW D1MV 90CRI CCT1 SURF PEND REC X1LED FLUOR

## WALL LED LINEAR 4" X 5" DIRECT/INDIRECT ONLY

Designed for distinctive architectural lighting plans, this linear 4" X 5" pendant (direct and indirect) can be installed individually or in group patterns. The snap fit lens provides excellent lighting and the five inch height makes a bold statement.

ITEM NO.	DESCRIPTION
45WSF48LUR12WD24WDMV40KWH	48"L x 4"W x 5"H / Frosted Lens / Up 12W, Dn 24W, 3600L / 0-10V Dim / 4000K / White
45WSF48LUR18WD36WDMV40KWH	48"L x 4"W x 5"H / Frosted Lens / Up 18W, Dn 36W, 5400L / 0-10V Dim / 4000K / White
45WSF96LUR24WD48WDMV40KWH	96"L x 4"W x 5"H / Frosted Lens / Up 24W, Dn 48W, 7200L / 0-10V Dim / 4000K / White
45WSF96LUR36WD72WDMV40KWH	96"L x 4"W x 5"H / Frosted Lens / Up 36W, Dn 72W, 10800L / 0-10V Dim / 4000K / White

EM6 G120 OS2 RGBW D1MV 90CRI CCT1 PEND

# Linear Wall



See Matching Pendants or Surface Mounts on page 27.

Shown with baffled louvre. Change SF to BL.

## WALL LINEAR 6" X 6" DIRECT ONLY OR INDIRECT ONLY

This geometric 6" fixture adds a distinctive architectural element to any layout and is ideal for corridors, lobbies, and office areas. The efficient LED T8 lamps provide high lumen output with significant energy savings.

ITEM NO.	DESCRIPTION
66WSF48LR24W2400LDMV40KWH	48"L x 6"W x 6"H / Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K / White
66WSF48LR48W4800LDMV40KWH	48"L x 6"W x 6"H / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K / White
66WSF96LR48W4800LDMV40KWH	96"L x 6"W x 6"H / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K / White
66WSF96LR96W9600LDMV40KWH	96"L x 6"W x 6"H / Frosted Lens / 96W, 9600L / 0-10V Dim / 4000K / White

EM6 G120 OS2 RGBW D1MV 90CRI CCT1 SURF PEND REC X1LED FLUOR

Change SF to MW for Matte White Lens.

## WALL LINEAR 6" X 6" DIRECT/INDIRECT

This geometric 6" fixture adds a distinctive architectural element to any layout and is ideal for corridors, lobbies, and office areas. The efficient LED T8 lamps provide high lumen output with significant energy savings.

ITEM NO.	DESCRIPTION
66WSF48LUR12WD24WDMV40KWH	48"L x 6"W x 6"H / Frosted Lens / Up 12W, Dn 24W, 3600L / 0-10V Dim / 4000K / White
66WSF48LUR24WD48WDMV40KWH	48"L x 6"W x 6"H / Frosted Lens / Up 18W, Dn 36W, 5400L / 0-10V Dim / 4000K / White
66WSF96LUR24WD48WDMV40KWH	96"L x 6"W x 6"H / Frosted Lens / Up 24W, Dn 48W, 7200L / 0-10V Dim / 4000K / White
66WSF96LUR36WD72WDMV40KWH	96"L x 6"W x 6"H / Frosted Lens / Up 36W, Dn 72W, 10800L / 0-10V Dim / 4000K / White

EM6 G120 OS2 RGBW D1MV 90CRI CCT1 PEND

Change SF to MW for Matte White Lens.



Shown with wall mount brackets.

Special size EM.



For Matt White Lens, change "A" to "MW".



For separately switching, add 11 after DMV. For 4 way pull chain, add PC4.

For XLED version, consult factory.

## SLOTTED LOW PROFILE LED LINEAR PENDANT

The clean SLW's lines are ideal for general lighting for circulation spaces, high impact areas, kitchen islands, and offices. Can be pendant-mounted individually or in continuous runs. Add sensors. Smart sensors available.

ITEM NO.	DESCRIPTION
<b>Downlight Only</b>	
SLWFR48LY48W4800LDMV40KWH	48"L x 7.70"W x 2"W / Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K / White
SLWFR96LY96W9600LDMV40KWH	96"L x 7.70"W x 2"W / Frosted Lens / 96W, 9600L / 0-10V Dim / 4000K / White
<b>Direct/Indirect</b>	
SLWFR48LUY12WD24WDMV40KWH	48"L x 7.70"W x 2"W / Frosted Lens / Up 12W, Dn 24W, 3600L / 0-10V Dim / 4000K / White
SLWFR48LUY18WD36WDMV40KWH	48"L x 7.70"W x 2"W / Frosted Lens / Up 18W, Dn 36W, 5400L / 0-10V Dim / 4000K / White
SLWFR96LUY24WD48WDMV40KWH	96"L x 7.70"W x 2"W / Frosted Lens / Up 24W, Dn 48W, 7200L / 0-10V Dim / 4000K / White
SLWFR96LUY36WD72WDMV40KWH	96"L x 7.70"W x 2"W / Frosted Lens / Up 36W, Dn 72W, 10800L / 0-10V Dim / 4000K / White

EM6 G120 OS2 RGBW D1MV 90CRI CCT1 SURF WALL X1LED5 FLUORT5

## 4" WALL LINEAR

A stylish luminaire with a variety of LED combinations and sizes enhanced by a linear-sided acrylic diffuser. Designed for baths, kitchens, rec rooms, corridors, aisles, stairwells, and over mirrors and displays.

ITEM NO.	DESCRIPTION
555A24LY28W3200LDMV40KWH	24"L x 5.62"W x 4.5"H / Prismatic Acrylic Lens / 28W, 3200L / 0-10V Dim / 4000K / White
555A24LY35W4000LDMV40KWH	24"L x 5.62"W x 4.5"H / Prismatic Acrylic Lens / 35W, 4000L / 0-10V Dim / 4000K / White
555A48LY30W4100LDMV40KWH	48"L x 5.62"W x 4.5"H / Prismatic Acrylic Lens / 30W, 4100L / 0-10V Dim / 4000K / White
555A48LY48W6000LDMV40KWH	48"L x 5.62"W x 4.5"H / Prismatic Acrylic Lens / 48W, 6000L / 0-10V Dim / 4000K / White
555A48LY57W6900LDMV40KWH	48"L x 5.62"W x 4.5"H / Prismatic Acrylic Lens / 57W, 6900L / 0-10V Dim / 4000K / White
555A48LY72W8800LDMV40KWH	48"L x 5.62"W x 4.5"H / Prismatic Acrylic Lens / 72W, 8800L / 0-10V Dim / 4000K / White

EM1 G120 RGBW D1MV 90CRI CCT1 X1LED FLUOR

## DIRECT/INDIRECT WALL FIXTURE

This clean, crisp, spec-grade fixture is designed for "over the bed" applications and may also be used in bath, stairwells, and office applications. Up and down light may be controlled with optional dividers, front baffles, and dual drivers. Also available with pull chain.

ITEM NO.	DESCRIPTION
215A24L1U2DY36W3600LDFDMV40K	24"L x 5.62"W x 4.50"H / Prismatic Acrylic / 1U2D / 36W, 3600L / 0-10V Dim / 4000K
215A24L2U2DY48W4800LDFDMV40K	24"L x 5.62"W x 4.50"H / Prismatic Acrylic / 2U2D / 48W, 4800L / 0-10V Dim / 4000K
215A48L1U1DY48W4800LDFDMV40K	48"L x 5.62"W x 4.50"H / Prismatic Acrylic / 1U1D / 48W, 4800L / 0-10V Dim / 4000K
215A48L2U1DY73W7200LDFDMV40K	48"L x 5.62"W x 4.50"H / Prismatic Acrylic / 2U1D / 73W, 7200L / 0-10V Dim / 4000K
215A48L2U2DY97W9600LDFDMV40K	48"L x 5.62"W x 4.50"H / Prismatic Acrylic / 2U2D / 97W, 9600L / 0-10V Dim / 4000K

EM1 G120 RGBW D1MV 90CRI CCT1 X1LED FLUOR

# Linear Wall



## STAIRWELL STANDARD

This sleek, spec-grade, wall-mounted fixture with SMARTSENSE and forward throw optics is ideal for brightening the perimeters of offices or when used as a wall lighting system for corridors.

ITEM NO.	DESCRIPTION
SSSTWFR24LY15W2050LDMV(XX)40K	24"L x 5.62"W x 4.5"H / Frosted Lens / 15W, 2050L / 0-10V Dim / 4000K / White
SSSTWFR24LY24W3000LDMV(XX)40K	24"L x 5.62"W x 4.5"H / Frosted Lens / 24W, 3000L / 0-10V Dim / 4000K / White
SSSTWFR48LY48W6000LDMV(XX)40K	48"L x 5.62"W x 4.5"H / Frosted Lens / 46W, 5500L / 0-10V Dim / 4000K / White
SSSTWFR48LY57W6900LDMV(XX)40K	48"L x 5.62"W x 4.5"H / Frosted Lens / 46W, 5500L / 0-10V Dim / 4000K / White

EM4 G120 OS4 D1MV 90CRI CCT1

(XX) for Percentage of light output when it is not occupied.

## STAIRWELL LINEAR LED W/ 20% OUTPUT AND EMERGENCY UNIT


This sleek, spec-grade, wall-mounted fixture with SMARTSENSE and forward throw optics is preset for 20% output in standby mode and has an integrated emergency backup.



ITEM NO.	DESCRIPTION
SSSTWFR48LY46W5500LDMV(20)40KEM	48"L x 5.62"W x 4.5"H / Frosted Lens / 46W, 5500L / 0-10V Dim / 4000K / White / 10W EM

EM4 G120 OS4 D1MV 90CRI CCT1

Fixed output driver. No variations.

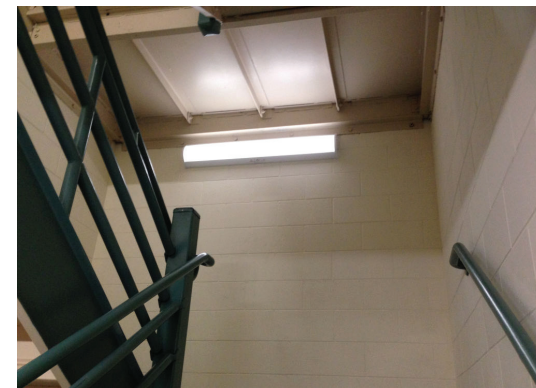

## LED STAIRWELL LINEAR 4" SQUARE

This clean, crisp, spec-grade fixture is designed for "over the bed" applications and may also be used in bath, stairwells, and office applications. Up and down light may be controlled with optional dividers, front baffles, and dual drivers. Features Saylite SMARTSENSE technology.



ITEM NO.	DESCRIPTION
SS213A24LY15W1500LDMV(XX)40K	24.25"L x 4.4"W x 4.5"H / Prismatic Acrylic Frosted Lens / 15W, 1500L / 0-10V Dim / 4000K / White
SS213A24LY24W2700LDMV(XX)40K	24.25"L x 4.4"W x 4.5"H / Prismatic Acrylic Frosted Lens / 24W, 2400L / 0-10V Dim / 4000K / White
SS213A48LY48W4800LDMV(XX)40K	48.25"L x 4.4"W x 4.5"H / Prismatic Acrylic Frosted Lens / 48W, 4800L / 0-10V Dim / 4000K / White
SS213A48LY57W5700LDMV(XX)40K	48.25"L x 4.4"W x 4.5"H / Prismatic Acrylic Frosted Lens / 57W, 5700L / 0-10V Dim / 4000K / White
SS213A48LY45W4500LDMV(20)40KEM	48.25"L x 4.4"W x 4.5"H / Prismatic Acrylic Frosted Lens / 45W, 4500L / 0-10V Dim / 4000K / White / 10W EM

EM1 G120 OS4 D1MV 90CRI CCT1 X1LED FLUOR

(XX) for Percentage of light output when it is not occupied.

## LED SPILL RING BATH

Linear-sided acrylic lens distributes light evenly while reducing glare and providing visual comfort. Ideal for over-vanity bath applications.

ITEM NO.	DESCRIPTION
HOTBD24L23W2195LMVSNMCT	24.6"L x 5.7"W x 4.4"E / 23W, 2195L / 120-277V / Satin Nickel / Dip Switch for 3000K, 3500K or 4000K / Non Dim
HOTBD36L34W3260LMVSNMCT	36.75"L x 6"W x 4.25"E / 34W, 3265L / 120-277V / Satin Nickel / Dip Switch for 3000K, 3500K or 4000K / Non Dim
HOTBD48L48W4590LMVSN30K	48.75"L x 6"W x 4.3"E / 48W, 4590L / 120-277V / Satin Nickel / 3000K or 4000K / Non Dim

EM3 G120 90CRI CCT4 SURF X1LED FLUOR

Consult for Bronze ends.

## LED Linkable Undercabinet

Acrylic prismatic lens distributes light evenly while reducing glare and providing visual comfort.

ITEM NO.	DESCRIPTION
LUC9L5WD120MCT	9"L x 5"W x 1"H / 5W, 250L / D120V / Color Selectable 30/35/40K / Finish: White
LUC12L6WD120MCT	12"L x 5"W x 1"H / 6W, 450L / D120V / Color Selectable 30/35/40K / Finish: White
LUC18L9WD120MCT	18"L x 5"W x 1"H / 9W, 675L / D120V / Color Selectable 30/35/40K / Finish: White
LUC24L11WD120MCT	24"L x 5"W x 1"H / 11W, 825L / D120V / Color Selectable 30/35/40K / Finish: White
LUC33L13WD120MCT	33"L x 5"W x 1"H / 13W, 975L / D120V / Color Selectable 30/35/40K / Finish: White
LUC42L16WD120MCT	42"L x 5"W x 1"H / 16W, 1200L / D120V / Color Selectable 30/35/40K / Finish: White

SURF

Undercabinets come with power cord, joiner cable, butt connector and a BX connector.

## LED HIGH LUMEN TAPE

LED tape lighting allows you to easily and inexpensively put light exactly where you need it. Available in warm white, natural, and white.

ITEM NO.	DESCRIPTION
T5050L24V27K*	LED HIGH LUMEN TAPE 1ft PIECES 24v 27K
T5050L24V30K	LED HIGH LUMEN TAPE 1ft PIECES 24v 30K
T5050L24V40K	LED HIGH LUMEN TAPE 1ft PIECES 24v 40K
TCON4M4M	LED 4 PIN TAPE MALE to MALE CONNECTOR
TEXT12IN	LED 12 inch 4 PIN TAPE JUMPER CABLE MtoF
TEXT36IN	LED 36 inch 4 PIN TAPE JUMPER CABLE MtoF
TEXT4IN	LED 4 inch 4 PIN TAPE JUMPER CABLE MtoF
THWCON10	LED 10 foot HARDWIRE CONNECTOR
TTCON	LED 4 PIN TAPE MALE to MALE T CONNECTOR

\*Priced per Foot, 16ft/Reel. Specify remote driver.

## REMOTE DRIVER (Dimmable with any standard MLV Triac (leading edge) control)

ITEM NO.	DESCRIPTION
MTIM20L24DC	Constant Voltage DRIVER 20W 24VDC USE MAGNETIC LV CONTROL
MTIM40L24DC	Constant Voltage DRIVER 40W 24VDC USE MAGNETIC LV CONTROL
MTIM60L24DC	Constant Voltage DRIVER 60W 24VDC USE MAGNETIC LV CONTROL
MTIM96L24DC	Constant Voltage DRIVER 96W 24VDC USE MAGNETIC LV CONTROL
MTIM150L24DC	Constant Voltage DRIVER 150W 24VDC USE MAGNETIC LV CONTROL
AC60VD24AB2RV	Constant Voltage Electronic, Driver 60W with Junction Box use 0-10V Dimming
AC100VD24AB2RV	Constant Voltage Electronic, Driver 100W with Junction Box use 0-10V Dimming



MCT - Provides choice of 3000, 3500 or 4000 kelvin from the same fixture with a dip switch.




MCT - Provides choice of 3000, 3500 or 4000 kelvin from the same fixture with a dip switch.



Consult for other drivers and wattages.

For the Icon Legend, see pages 92-93. Item numbers highlighted in gray are DLC Listed.

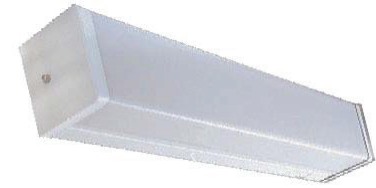

**WALL FIXTURE 4 FT.**

ITEM NO.	DESCRIPTION
555MW232X1LN18W40	4ft. Wall 4200 Lumen 2x18W LED T8 4000K Lamps Included

EM8 OS4 CCT2 LED FLUOR X1LEDT8D

**STAIRWELL 4FT. WITH ULTRASONIC SENSOR**

ITEM NO.	DESCRIPTION
SS213A232X1LN18W40	4ft. Wall 4200 Lumen 2x18W LED T8 4000K Lamps Included

EM8 OS4 CCT2 LED FLUOR X1LEDT8D

1 Light on Always, 1 Light on Sensor

**4X4 LINEAR WALL**



ITEM NO.	DESCRIPTION
44WSF117X1WHLN15W40	4" x 24" 1700 Lumen Pendant w/Cable Kit 1x15W LED T8 4000 Lamps Included
44WSF217X1WHLN15W40	4" x 24" 3400 Lumen Pendant w/Cable Kit 2x15W LED T8 4000 Lamps Included
44WSF132X1WHLN18W40	4" x 48" 2100 Lumen Pendant w/Cable Kit 1x18W LED T8 4000 Lamps Included
44WSF232X1WHLN18W40	4" x 48" 4200 Lumen Pendant w/Cable Kit 2x18W LED T8 4000 Lamps Included
44WSF1328X1WHLN18W40	4" x 96" 4200 Lumen Pendant w/Cable Kit 2x18W LED T8 4000 Lamps Included
44WSF2328X1WHLN18W40	4" x 96" 8400 Lumen Pendant w/Cable Kit 4x18W LED T8 4000 Lamps Included

EM8 OS5 CCT2 SURF PEND REC LED FLUOR X1LEDT8D

Change SF (Snap Fit Frosted Lens) to MW for Matte White Regressed Lens.  
Change WH to BK (Black), IR (Iron), SL (Silver) or BR (Bronze).  
For Baffled Louver, Change MW to BL.

**6X6 LINEAR WALL**




ITEM NO.	DESCRIPTION
66MMW117X1WHLN15W40	6" x 26" 1700 Lumen Pendant w/Cable Kit 1x15W LED T8 4000 Lamps Included
66MMW217X1WHLN15W40	6" x 26" 3400 Lumen Pendant w/Cable Kit 2x15W LED T8 4000 Lamps Included
66MMW132X1WHLN18W40	6" x 48" 2100 Lumen Pendant w/Cable Kit 1x18W LED T8 4000 Lamps Included
66MMW232X1WHLN18W40	6" x 48" 4200 Lumen Pendant w/Cable Kit 2x18W LED T8 4000 Lamps Included
66MMW1328X1WHLN18W40	6" x 96" 4200 Lumen Pendant w/Cable Kit 4x18W LED T8 4000 Lamps Included
66MMW2328X1WHLN18W40	6" x 96" 8400 Lumen Pendant w/Cable Kit 4x18W LED T8 4000 Lamps Included

EM8 OS5 CCT2 SURF PEND REC LED FLUOR X1LEDT8D

Change WH to BK (Black), IR (Iron), SL (Silver) or BR (Bronze).  
For Baffled Louver, Change MW to BL.

# High Bays

Saylite offers high-efficiency LED high bay fixtures for warehouse, manufacturing, and commercial facilities – anywhere you need exceptional light distribution for mounting heights up to 40 feet. The LED high bay’s superior lumen package is ideal for replacing traditional metal halide and linear fluorescent high bay systems. The benefits include high efficiency, excellent color rendering, long life, instant on, and improved uniformity. Saylite heavy-duty high bay housings are manufactured from steel for long-lasting performance. Choose from linear or round, lensed or open, and with a wide range of sensors and controls.

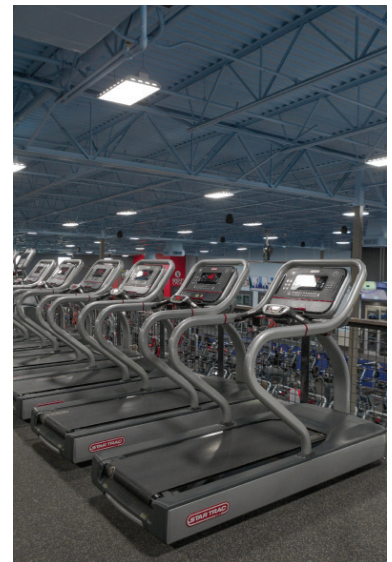

**THL SERIES**

Create an industrial modern look in your space with our new sleek THL Series. These cost-efficient fixtures provide high light output using a precision-formed reflector combined with high-performing led strips to provide max light output for ceilings from 15ft to 40ft. Ideal for warehouses, manufacturing plants, sports facilities and retail spaces.



ITEM NO.	DESCRIPTION
THLPFR20X24LB105WDMVWH50K	2X2/HIGH BAY/PENDANT/FROSTED LENS/105W, 15000L/0-10V DIM/50K
THLPFR20X24LB165WDMVWH50K	2X2/HIGH BAY/PENDANT/FROSTED LENS/165W, 24000L/0-10V DIM/50K
THLPFR20X48LB210WDMVWH50K	2X4/HIGH BAY/PENDANT/FROSTED LENS/210W, 30000L/0-10V DIM/50K
THLPFR20X48LB250WDMVWH50K	2X4/HIGH BAY/PENDANT/FROSTED LENS/250W, 35000L/0-10V DIM/50K
THLPFR20X48LB360WDMVWH50K	2X4/HIGH BAY/PENDANT/FROSTED LENS/360W, 52000L/0-10V DIM/50K

EM14 80CRI 90CRI CCT1 PEND

# High Bays



## MINI HIGH BAY

High efficiency LED high bay engineered for premium performance in low and medium ceiling applications ideally suited for warehouses, manufacturing plants, sports facilities and retail spaces. A precision-formed reflector system, available in highly reflective enhanced white achieves maximum light output for ceilings from 10 feet to 20 feet. The unique arrangement is ideal for wide area lighting and putting the light exactly where you need it with fewer fixtures. Surface, pendant, chain or stem mounting options.

ITEM NO.	DESCRIPTION
HBC24LB65W10000LA10DMV30K	24"L x 20.39"W x 3.62"H / Mini High Bay / 65W, 10000L / 0-10V Dim / 5000K
HBC24LB95W15000LA10DMV30K	24"L x 20.39"W x 3.62"H / Mini High Bay / 95W, 15000L / 0-10V Dim / 5000K
HBC24LB130W20000LA10DMV30K	24"L x 20.39"W x 3.62"H / Mini High Bay / 130W, 20000L / 0-10V Dim / 5000K
HBC24LB165W25000LA10DMV30K	24"L x 20.39"W x 3.62"H / Mini High Bay / 165W, 25000L / 0-10V Dim / 5000K
HBC24LB190W30000LA10DMV50K	24"L x 20.39"W x 3.62"H / Mini High Bay / 165W, 25000L / 0-10V Dim / 5000K

EM1 OS2 D1MV 90CRI CCT1 SURF PEND

For Door Frame and Lens add DFFR.

## LOW BAY

Same great version with lower output for low ceiling applications.

ITEM NO.	DESCRIPTION
HBC48LY65W10000LW30DMV50K	48.10"L x 16.39"W x 3.62"H / Low Bay / 65W, 10000L / 0-10V Dim / 5000K
HBC48LY95W15000LW30DMV50K	48.10"L x 16.39"W x 3.62"H / Low Bay / 95W, 15000L / 0-10V Dim / 5000K
HBC48LY130W20000LW30DMV50K	48.10"L x 16.39"W x 3.62"H / Low Bay / 130W, 20000L / 0-10V Dim / 5000K

EM1 OS2 D1MV 90CRI CCT1 SURF PEND X1LED FLUOR


Consult for Door Frame and Lens.

## HIGH BAY

This workhorse features a precision-formed reflector system available in highly reflective enhanced white to achieve maximum light output for warehouses, manufacturing plants, sports facilities and retail spaces. With surface, pendant, chain or stem mounting options.

ITEM NO.	DESCRIPTION
HBC48LB215W35000LA10DMV50K	48.10"L x 20.39"W x 3.62"H / High Bay / 215W, 35000L / 0-10V Dim / 5000K
HBC48LB260W40000LA10DMV50K	48.10"L x 20.39"W x 3.62"H / High Bay / 260W, 40000L / 0-10V Dim / 5000K
HBC48LB285W45000LA10DMV50K	48.10"L x 20.39"W x 3.62"H / High Bay / 285W, 45000L / 0-10V Dim / 5000K
HBC48LB320W50000LA10DMV50K	48.10"L x 20.39"W x 3.62"H / High Bay / 320W, 50000L / 0-10V Dim / 5000K

EM1 OS2 D1MV 90CRI CCT1 SURF PEND X1LED FLUOR



## T BAR HIGH BAY

The all NEW High bay 131 series offers high-quality industrial output engineered especially for T Bar ceiling. These fixtures offer durability, energy efficiency, and provide great illumination for general lighting applications. Ideal for commercial and industrial buildings.

ITEM NO.	DESCRIPTION
HB131FR2X2LB60WDMV50K	2X2/HIGH BAY/FROSTED LENS/60W,8600L/0-10V DIM/50K
HB131FR2X2LB100WDMV50K	2X2/HIGH BAY/FROSTED LENS/100W, 14250L/0-10V DIM/50K
HB131FR2X4LB120WD1MV50K	2X4/HIGH BAY/FROSTED LENS/120W, 17100L/0-10V DIM/50K
HB131FR2X4LB200WD1MV50K	2X4/HIGH BAY/FROSTED LENS/200W, 28500L/0-10V DIM/50K

EM6 EM20 G120 D1MV 90CRI CCT1 SURF PEND REC

**HB131 Series is ideal for large ceiling areas with T Bar ceilings.**

## LINEAR HIGH BAY w/SENSOR

ITEM NO.	DESCRIPTION
SSSGB48L180W24500LDMV40K	SGB Linear High Bay 180W DMV 40K +Sensor
SSSGB48L180W24500LDMV50K	SGB Linear High Bay 180W DMV 50K +Sensor



CPR Low Bay



RHB High Bay



RHB 55,000 Lumen



RHB with optional sensor & trunion mount.

## ROUND LOW AND HIGH BAY

A sleek, round low (CPR) and high bay (RHB) available in 3,500 or 55,500 Lumen versions makes designing in challenging environments like warehouses, gymnasiums, retail centers and manufacturing facilities easy. Engineered to withstand significant voltage surges common in these large venues, ambient temperatures up to 55 degree Celsius (131 degree Fahrenheit) and dust, moisture and airborne contaminants with IP65 rating. A knockout in the center of the body allows adding a sensor easily and economically for enhanced energy savings and performance.

ITEM NO.	DESCRIPTION
CPR12L30W3600LDMV50KWH	12" Dia x 3.32"H /30W, 3600L / 1-10V Dim / 5000K / Parking Garage,White
CPR12L45W5000LDMV50KWH	12" Dia x 3.32"H /45W, 5000L / 1-10V Dim / 5000K / Parking Garage,White

RHB11L67W9100LDMV50KKBK	13.03" Dia x 7.4"H /67W , 9100L /1-10V Dim / 5000K / Frosted lens,Black
RHB11L97W12300LDMV50KKBK	13.03" Dia x 7.4"H /97W , 12300L /1-10V Dim / 5000K / Frosted lens,Black
RHB13L140W17500LDMV50KKBK	13.03" Dia x 7.76"H /140W , 17500L /1-10V Dim / 5000K / Frosted lens,Black
RHB13L180W25000LDMV50KKBK	13.1" Dia x 7.1"H /180W, 24500L /1-10V Dim / 5000K / Frosted lens,Black
RHB13L215W30000LDMV50KKBK	13.1" Dia x 7.1"H /215W, 29000L /1-10V Dim / 5000K / Frosted lens,Black
RHB24L340W55500LDMV50KBZ	24.25" Dia x 8.72"H /340W, 55500L /1-10V Dim / 5000K / 120°Lens/ Bronze

Consult for bronze finish, with sensor or emergency.



# High Bays



## VAPOR TIGHT HIGH BAY WET LOCATION

Demanding environments call for this tough, enclosed and gasketed, high bay fixture. For use in both indoor and outdoor applications, appropriate for damp and wet locations, as well as for protection against dust and other non-hazardous contaminants. Ideal for food industry, cold storage, warehouses, parking garages, commercial kitchens, car washes, utility tunnels, laundries and industrial facilities. IP67, NEMA 4X.

ITEM NO.	DESCRIPTION
CITACL48LV80W9700LDMV50K	51.87"L x 14.44"W x 4.63"H / Clear with Matte White Ends Lens / 80W, 9700L / 0-10V Dim / 5000K
CITACL48LA120W15500LDMV50K	51.87"L x 14.44"W x 4.63"H / Clear with Matte White Ends Lens / 120W, 15500L / 0-10V Dim / 5000K
CITACL48LA140W18000LDMV50K	51.87"L x 14.44"W x 4.63"H / Clear with Matte White Ends Lens / 140W, 18000L / 0-10V Dim / 5000K
CITACL48LA150W19500LDMV50K	51.87"L x 14.44"W x 4.63"H / Clear with Matte White Ends Lens / 150W, 19500L / 0-10V Dim / 5000K
CITACL48LA180W23200LDMV50K	51.87"L x 14.44"W x 4.63"H / Clear with Matte White Ends Lens / 180W, 23200L / 0-10V Dim / 5000K

EM6 G120 OS1 RGBW D1MV 90CRI CCT1 X1LED FLUOR

See specification sheet for mounting options and accessories. CL is Clear Acrylic Lens, change to FR for Frosted Acrylic Lens. For Polycarbonate Versions add PC after CL or FR.

## VAPOR TIGHT LOW BAY WET LOCATION

A low bay version and lower output of the above fixture. IP67, NEMA 4X.

ITEM NO.	DESCRIPTION
CITACL24LY80W8000LDMV50K	26.6"L x 14.5"W x 5.8"H / Clear with Matte White Ends Lens / 80W, 8000L / 0-10V Dim / 5000K
CITACL24LY100W10000LDMV50K	26.6"L x 14.5"W x 5.8"H / Clear with Matte White Ends Lens / 100W, 10000L / 0-10V Dim / 5000K
CITACL24LY140W14000LDMV50K	26.6"L x 14.44"W x 5.8"H / Clear with Matte White Ends Lens / 140W, 14000L / 0-10V Dim / 5000K

EM3 G120 OS6 RGBW D1MV CCT1 SURF PEND

See specification sheet for mounting options and accessories. CL is Clear Acrylic Lens, change to FR for Frosted Acrylic Lens. For Polycarbonate Versions add PC after CL or FR.




Frosted Lens option (FR) provides soft, glare-free lighting.

Citadel High Bay is ideal for food processing areas where a wash down fixture with abundant lighting is required.



# X1LED

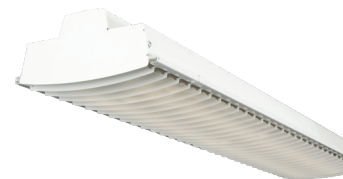

Special red sockets to identify fixtures made for LED T8 lamps.

## PREMIERE HIGH BAY

ITEM NO.	DESCRIPTION
HBC432M23X1LN18W50	High Bay 48 inch 8400 Lumens w/4x18W LED T8 5000K Lamps Included
HBC632M23X1LN18W50	High Bay 48 inch 12600 Lumens w/6x18W LED T8 5000K Lamps Included
HBC832M23X1LN18W50	High Bay 48 Inches 16800 Lumens w/8x18W LED T8 5000K Lamps Included
HBC1032M23X1LN18W50	High Bay 48 Inches 21000 Lumens w/10x18W LED T8 5000K Lamps Included
HBC1232M23X1LN18W50	High Bay 48 Inches 25200 Lumens w/12x18W LED T8 5000K Lamps Included

EM8 OS5 CCT2 LED FLUOR X1LEDT8D

## H6L SERIES

ITEM NO.	DESCRIPTION
H6L432M23X1LN18W50	High Bay 96 Inches Tandem 16800 Lumens w/8x18W LED T8 5000K Lamps Included
H6L432M23X1LN18W50	High Bay 48 Inches Tandem 8400 Lumens w/4x18W LED T8 5000K Lamps Included
H6L632M23X1LN18W50	High Bay 96 Inches Tandem 21000 Lumens w/10x18W LED T8 5000K Lamps Included
H6L632M23X1LN18W50	High Bay 48 Inches Tandem 12600 Lumens w/6x18W LED T8 5000K Lamps Included

EM8 CCT2 LED FLUOR X1LEDT8D

## H2L SERIES

ITEM NO.	DESCRIPTION
H2L132M23X1LN18W50	High Bay 48 Inches 2100 Lumens w/1x18W LED T8 5000K Lamps Included
H2L232M23X1LN18W50	High Bay 48 Inches 4200 Lumens w/2x18W LED T8 5000K Lamps Included

EM3 CCT2 LED FLUOR X1LEDT8D

## BAFFLED HIGH BAY

ITEM NO.	DESCRIPTION
FHBL232X1LN18W50	Linear Louvered 48 Inches 4200 Lumens w/2x18W LED T8 5000K Lamps Included
FHBL332X1LN18W50	Linear Louvered 48 Inches 6300 Lumens w/3x18W LED T8 5000K Lamps Included
FHBL432X1LN18W50	Linear Louvered 48 Inches 8400 Lumens w/4x18W LED T8 5000K Lamps Included
FHBL2328X1LN18W50	Linear Baffled Louver 96 Inches Tandem 8400 Lumens w/4x18W LED T8 5000K Lamps Included
FHBL3328X1LN18W50	Linear Baffled Louver 96 Inches Tandem 12600 Lumens w/6x18W LED T8 5000K Lamps Included
FHBL4328X1LN18W50	Linear Baffled Louver 96 Inches Tandem 16800 Lumens w/8x18W LED T8 5000K Lamps Included

EM9 CCT2 LED FLUOR X1LEDT8D

Consult for HBG (I Beam Version) Series

# Retrofit Kits

If you are looking for retrofitting expertise, you've come to the right place. Saylite offers a comprehensive assortment of LED retrofit products and we package and ship kits in ways that reduce time for storage, unpacking and installing, even pre-wiring kits in the factory to minimize time in the field. We also make custom-configured kits in a way that eliminates 15% of unnecessary costs associated with the "universal" kits from our competitors.



Saylite offers a full assortment of Savegreen Linear LED lamps and X1LED retrofit kits to change any fluorescent fixture to accept LED linear lamps. See Savegreen Lamps on pages 142-145.

## X1LED

At [www.saylite.com/support/videos](http://www.saylite.com/support/videos) you can view simple "how to" solutions for retrofitting strips and troffers.



Consult for  
Parabolic Retrofit Kit

Installs In Fluorescent  
Troffer In Under 5 Minutes



## LED TROFFER RETROFIT KIT

Designed to quickly convert a fluorescent troffer to a highly efficient LED light fixture. A durable gear tray installs quickly with four screws in minutes. LED arrays and drivers optimize performance and life with the heat sink of the gear tray.

ITEM NO.	DESCRIPTION
22CY20WW10DMV40K	22.6"L x 14.73"W x 1.74"H / 20W, 2700L / 0-10V Dim / 4000K
22CY25WW10DMV40K	22.6"L x 14.73"W x 1.74"H / 25W, 3300L / 0-10V Dim / 4000K
22CY33WW10DMV40K	22.6"L x 14.73"W x 1.74"H / 33W, 4250L / 0-10V Dim / 4000K
24CY35WW10DMV40K	46"L x 14.54"W x 1.85"H / 35W, 5400L / 0-10V Dim / 4000K
24CY45WW10DMV40K	46"L x 14.54"W x 1.85"H / 45W, 6750L / 0-10V Dim / 4000K
24CY54WW10DMV40K	46"L x 14.54"W x 1.85"H / 54W, 7700L / 0-10V Dim / 4000K

EM7 G120 OS1 D1MV 90CRI CCT1 SMART

## ENCLOSED STRIP RETROFIT KIT

This workhorse Retrofit solution is now available with a lens. It provides an economical and versatile solution for many applications including retail, industrial, and mezzanine low-ceilinged applications where a wide light distribution is needed.



ITEM NO.	DESCRIPTION
RFSFFR24LY12W1200LDMV40K	24.00"L x 4.25"W x 3.25"H / Frosted Lens / 12W, 1200L / 0-10V Dim / 4000K
RFSFFR48LY24W2600LDMV40K	48.00"L x 4.25"W x 3.25"H / Frosted Lens / 24W, 2600L / 0-10V Dim / 4000K
RFSFFR48LY48W5400LDMV40K	48.00"L x 4.25"W x 3.25"H / Frosted Lens / 48W, 5400L / 0-10V Dim / 4000K
RFSFFR48LY57W6200LDMV40K	48.00"L x 4.25"W x 3.25"H / Frosted Lens / 57W, 6200L / 0-10V Dim / 4000K
RFSFFR96LY62W6600LDMV40K	96.00"L x 4.25"W x 3.25"H / Frosted Lens / 62W, 6600L / 0-10V Dim / 4000K
RFSFFR96LY114W12400LDMV40K	96.00"L x 4.25"W x 3.25"H / Frosted Lens / 114W, 12400L / 0-10V Dim / 4000K

EM6 G120 OS1 RGBW D1MV 90CRI CCT1

Consult to retrofit 5" strip. See complete fixture on page 62.

## LED STRIP BALLAST COVER RETROFIT KIT (FOR 4.25" OR 5" STRIPS)

This economical Retrofit Kit provides enhanced output for an existing strip and is available in 48" and 96" lengths and with a frosted lens accessory to reduce LED brightness.



Frosted lens accessory  
reduces LED glare.  
C48FRLN



ITEM NO.	DESCRIPTION
4RB421LY25WDMV40K	48"L x 4.25"W x 0.5"H / 25W, 4200L / 0-10V Dim / 4000K
4RB421LY35WDMV40K	48"L x 4.25"W x 0.5"H / 35W, 5850L / 0-10V Dim / 4000K
4RB421LY45WDMV40K	48"L x 4.25"W x 0.5"H / 45W, 7400L / 0-10V Dim / 4000K
4RB501LY25WDMV40K	48"L x 5"W x 0.5"H / 25W, 4200L / 0-10V Dim / 4000K
4RB501LY35WDMV40K	48"L x 5"W x 0.5"H / 35W, 5850L / 0-10V Dim / 4000K
4RB501LY45WDMV40K	48"L x 5"W x 0.5"H / 45W, 7400L / 0-10V Dim / 4000K
8RB421LY50WDMV40K	96"L x 4.25"W x 0.5"H / 50W, 8400L / 0-10V Dim / 4000K
8RB421LY70WDMV40K	96"L x 4.25"W x 0.5"H / 70W, 11700L / 0-10V Dim / 4000K
8RB421LY90WDMV40K	96"L x 4.25"W x 0.5"H / 90W, 14800L / 0-10V Dim / 4000K
8RB501LY50WDMV40K	96"L x 5"W x 0.5"H / 50W, 8400L / 0-10V Dim / 4000K
8RB501LY70WDMV40K	96"L x 5"W x 0.5"H / 70W, 11700L / 0-10V Dim / 4000K
8RB501LY90WDMV40K	96"L x 5"W x 0.5"H / 90W, 14800L / 0-10V Dim / 4000K

EM6 G120 OS1 RGBW D1MV 90CRI CCT1 X1LED FLUOR

## CENTER BASKET

This retrofit fixture provides the look of a popular indirect/direct linear fixture but with a specially designed LED reflector and lens and provides comfortable, abundant lighting. Available in 1X4, 2X2 or 2X4 configurations and a variety of wattages, lumens, and color temperature



**Install in Minutes:**  
Place Rails between  
fixture and T-Bar  
on each side. Then  
latch and secure All-  
In-One-LED-Retrofit  
into place.




ITEM NO.	DESCRIPTION
DFUCLL22LY20W2700LDMV40K	23.90"L x 23.85"W x 3.65"H / Frosted Lens / 20W, 2700L / 0-10V Dim / 4000K
DFUCLL22LY25W3325LDMV40K	23.90"L x 23.85"W x 3.65"H / Frosted Lens / 25W, 3325L / 0-10V Dim / 4000K
DFUCLL22LY33W4275LDMV40K	23.90"L x 23.85"W x 3.65"H / Frosted Lens / 33W, 4275L / 0-10V Dim / 4000K
DFUCLL24LY25W3800LDMV40K	47.90"L x 23.85"W x 3.65"H / Frosted Lens / 25W, 3800L / 0-10V Dim / 4000K
DFUCLL24LY35W5250LDMV40K	47.90"L x 23.85"W x 3.65"H / Frosted Lens / 35W, 5250L / 0-10V Dim / 4000K
DFUCLL24LY45W6600LDMV40K	47.90"L x 23.85"W x 3.65"H / Frosted Lens / 45W, 6600L / 0-10V Dim / 4000K
DFUCLL24LY54W7700LDMV40K	47.90"L x 23.85"W x 3.65"H / Frosted Lens / 54W, 7700L / 0-10V Dim / 4000K

EM2 G120 OS2 RGBW D1MV CCT1

**RETROFIT LED T8 LAMP KIT** (Convert Existing Fluorescent Fixtures to LED)

Prewired UL socket kits to allow quick change from fluorescent to LED T8 Lamps.




ITEM NO.	DESCRIPTION
RLK1X1WR	Retrofit Lamp Kit Prewired Unshunted Sockets For 1 LED T8 Lamp Includes Companion Sockets
RLK2X1WR	Retrofit Lamp Kit Prewired Unshunted Sockets For 2 LED T8 Lamps Includes Companion Sockets
RLK3X1WR	Retrofit Lamp Kit Prewired Unshunted Sockets For 3 LED T8 Lamps Includes Companion Sockets
RLK4X1WR	Retrofit Lamp Kit Prewired Unshunted Sockets For 4 LED T8 Lamps Includes Companion Sockets
RLK1X1WRLI18W40	Retrofit Lamp Kit Prewired Unshunted Sockets For 1 LED T8 Lamp Included Plus Companion Sockets
RLK2X1WRLI18W40	Retrofit Lamp Kit Prewired Unshunted Sockets For 2 LED T8 Lamps Included Plus Companion Sockets
RLK3X1WRLI18W40	Retrofit Lamp Kit Prewired Unshunted Sockets For 3 LED T8 Lamps Included Plus Companion Sockets
RLK4X1WRLI18W40	Retrofit Lamp Kit Prewired Unshunted Sockets For 4 LED T8 Lamps Included Plus Companion Sockets

TB8 X1LEDT8D



UL Listed kit to bypass Fluorescent Ballast w/LED tubes.  
Add "8" after RLK for tandem version.  
To wire for Troffer Retrofit, add "TR" after "RLK".

Choice of Reflectors or Ballast Cover  
For ballast cover, choose strip width 4.25" or 5"

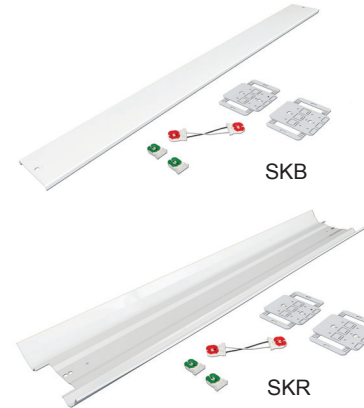

For enhanced light output add a mirrored specular reflector (M20) or white reflector (W10).

Universal socket bar SKRUSB is ideal to retrofit 4.25" to 5" strips with either reflector or ballast cover.

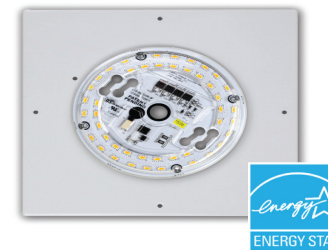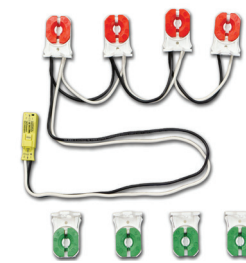

**UNIVERSAL STRIP RETROFIT KIT**

ITEM NO.	DESCRIPTION
SKB132B4L11X1L118W40	4.25" Strip Retrofit Kit 48". 2100 Lumen Included 1x18W 4000K Lamps
SKB232B4L11X1L118W40	4.25" Strip Retrofit Kit 48". 4200 Lumen Included 2x18W 4000K Lamps
SKB132B4L11X1L118W40	4.25" Strip Retrofit Kit 96". 4200 Lumen Included 2x18W 4000K Lamps
SKB232B4L11X1L118W40	4.25" Strip Retrofit Kit 96". 8400 Lumen Included 4x18W 4000K Lamps
SKB132B5L11X1L118W40	5" Strip Retrofit Kit 48". 2100 Lumen Included 1x18W 4000K Lamps
SKB232B5L11X1L118W40	5" Strip Retrofit Kit 48". 4200 Lumen Included 2x18W 4000K Lamps
SKB132B5L11X1L118W40	5" Strip Retrofit Kit 96". 8400 Lumen Included 2x18W 4000K Lamps
SKB232B5L11X1L118W40	5" Strip Retrofit Kit 96". 4200 Lumen Included 4x18W 4000K Lamps
SKR132W10L11X1L118W40	Strip Reflector Enhanced White Kit 48" 2100 Lumen Included 1x18W 4000K Lamp
SKR232W10L11X1L118W40	Strip Reflector Enhanced White Kit 48" 4100 Lumen Included 2x18W 4000K Lamp
SKR132W10L11X1L118W40	Strip Reflector Enhanced White Kit 96" 4200 Lumen Included 2x18W 4000K Lamp
SKR232W10L11X1L118W40	Strip Reflector Enhanced White Kit 96" 8400 Lumen Included 4x18W 4000K Lamp
SKR132M20L11X1L118W40	Strip Reflector Mirror Kit 48" 2100 Lumen Included 1x18W 4000K Lamp
SKR232M20L11X1L118W40	Strip Reflector Mirror Kit 48" 4100 Lumen Included 2x18W 4000K Lamp
SKR132M20L11X1L118W40	Strip Reflector Mirror Kit 96" 4200 Lumen Included 2x18W 4000K Lamp
SKR232M20L11X1L118W40	Strip Reflector Mirror Kit 96" 8400 Lumen Included 4x18W 4000K Lamp
SKRUSB	

CCT2 LED FLUOR X1LEDT8D

**RETROFIT REFLECTOR KIT FOR PARABOLICS/TROFFERS**

Convert a fluorescent troffer to LED T8 Lamps with reflectors to reduce the number of lamps.



To wire for Troffer Retrofit.

ITEM NO.	DESCRIPTION
22C2W10BL11X1L115W40	2x2 Retrofit Kit 4200 Lumen Enhanced White Reflector Includes 2x15W 4000K Lamps
22C3W10BL11X1L115W40	2x2 Retrofit Kit 6300 Lumen Enhanced White Reflector Includes 3x15W 4000K Lamps
24C2W10BL11X1L118W40	2x4 Retrofit Kit 4200 Lumen Enhanced White Reflector Includes 2x18W 4000K Lamps
24C3W10BL11X1L118W40	2x4 Retrofit Kit 6300 Lumen Enhanced White Reflector Includes 3x18W 4000K Lamps

TB8 EM8 LED FLUOR X1LEDT8D

**BALLAST COVER REFIT KIT** (Ideal to change 8ft Lamps to 4ft Tandem)

Convert a fluorescent strip to LED T8 Lamps.



ITEM NO.	DESCRIPTION
4RB421T8L11X1L118W40	4.25" Strip Retrofit Kit 48 In. 2100 Lumen Included 1x18W 4000K Lamp
4RB422T8L11X1L118W40	4.25" Strip Retrofit Kit 48 In. 4200 Lumen Included 2x18W 4000K Lamp
8RB421X2T8L11X1L118W40	4.25" Strip Retrofit Kit 96 In. 4200 Lumen Included 2x18W 4000K Lamp
8RB422X2T8L11X1L118W40	4.25" Strip Retrofit Kit 96 In. 8400 Lumen Included 4x18W 4000K Lamp

TB8 EM8 LED FLUOR X1LEDT8D

Consult for Lensed Strip X1LED Retrofit Kit.

**CTC / WALL FIXTURE RETROFITS**

The EOS features driver-on-board technology and heat sink for excellent light output. These Retrofit units are low maintenance and easy to install. Perfect for many applications including damp location.

ITEM NO.	DESCRIPTION
EOS12W900LD12030KSQ	EOS Array w/6" Sq Alum Heat Sink / 12W, 900L / Triac Dim / 3000K / 80CRI
EOS12W1000LD12040KSQ	EOS Array w/6" Sq Alum Heat Sink / 12W, 1000L / Triac Dim / 4000K / 80CRI
EOS15W1350LD12030KSQ	EOS Array w/8" Sq Alum Heat Sink / 15W, 1350L / Triac Dim / 3000K / 80CRI
EOS15W1400LD12040KSQ	EOS Array w/8" Sq Alum Heat Sink / 15W, 1400L / Triac Dim / 4000K / 80CRI
EOS22W1850LD12030KSQ	EOS Array w/8" Sq Alum Heat Sink / 22W, 1850L / Triac Dim / 3000K / 80CRI
EOS22W1900LD12040KSQ	EOS Array w/8" Sq Alum Heat Sink / 22W, 1900L / Triac Dim / 4000K / 80CRI
EOS32W2700LD12030KRD	EOS Array w/10" round Alum Heat Sink / 32W, 2700L / Triac Dim / 3000K/80CRI
EOS32W2700LD12040KRD	EOS Array w/10" round Alum Heat Sink / 32W, 2750L / Triac Dim / 4000K/80CRI

EOS12W900LD12030KSQ90	EOS Array w/6" Sq Alum Heat Sink / 12W, 900L / Triac Dim / 3000K/90CRI
EOS12W1000LD12040KSQ90	EOS Array w/6" Sq Alum Heat Sink / 12W, 1000L / Triac Dim / 4000K/90CRI
EOS15W1350LD12030KSQ90	EOS Array w/8" Sq Alum Heat Sink / 15W, 1350L / Triac Dim / 3000K/90CRI
EOS15W1400LD12040KSQ90	EOS Array w/8" Sq Alum Heat Sink / 15W, 1400L / Triac Dim / 4000K/90CRI
EOS22W1850LD12030KSQ90	EOS Array w/8" Sq Alum Heat Sink / 22W, 1850L / Triac Dim / 3000K/90CRI
EOS22W1900LD12040KSQ90	EOS Array w/8" Sq Alum Heat Sink / 22W, 1900L / Triac Dim / 4000K/90CRI
EOS32W2700LD12030KRD90	EOS Array w/10" round Alum Heat Sink / 31W, 2750L / Triac Dim / 3000K/90CRI
EOS32W2700LD12040KRD90	EOS Array w/10" round Alum Heat Sink / 31W, 2850L / Triac Dim / 4000K/90CRI

CCT4

Dimmable with standard dimmer. UL Classified for retrofit.

# CLOSE-TO-CEILING LED

Saylite offers a comprehensive selection of energy-efficient LED close-to-ceiling fixtures, and we offer them with a lead time that will feel like off-the-shelf. We offer many customizable options including sensors, lamps, diffusers and finishes. Need something that you don't see here? Just ask!



## LED SPILL RING CLOSE-TO-CEILING

This stylish ceiling fixture is offered in satin nickel or bronze (special order) and is available in multiple sizes from 10" to 32" to meet a wide variety of applications. Matching wall, bath, and linear versions make this fixture ideal for multi-family or hospitality applications.

ITEM NO.	DESCRIPTION
HOTCD10L18W1300LD120SN30K	9.8"D x 4.2"H / Matt White Lens / 18W, 1300L / Triac Dimming / 3000K / Satin Nickel
HOTCD12L17W1200LD120SN30K	11.8"D x 4.2"H / Matt White Lens / 17W, 1200L / Triac Dimming / 3000K / Satin Nickel
HOTCD12L18W1400LMVSNMCT	11.75"D x 4.2"H / Matt White Lens / 18W, 1400L / 120-277V / Available in 3000K, 3500K or 4000K / Non Dim
HOTCD14L24W2250LMVSNMCT	14.5"D x 4.75"H / Matt White Lens / 24W, 2260L / 120-277V / Available in 3000K, 3500K or 4000K / Non Dim
HOTCD16L30W2600LMVSNMCT	16"D x 5"H / Matt White Lens / 30W, 2600L / 120-277V / Available in 3000K, 3500K or 4000K / Non Dim
HOTCD18L33W3300LMVSNMCT	17.75"D x 5"H / Matt White Lens / 35W, 3300L / 120-277V / Available in 3000K, 3500K or 4000K / Non Dim

**CCT3**

MCT - Provides choice of 3000, 3500 or 4000 kelvin from the same fixture with a dip switch. Consult for 16 inch Version. For 4000K change 30K to 40K



Shown without lens to see sensor. Complete Fixture looks like HOTCD on left.

## LED MUSHROOM FIXTURE

TFC features a circular "puff" diffuser suitable for closets, laundry areas, and pantries in residential or light commercial applications.

ITEM NO.	DESCRIPTION
TFC11L13W900LD12030K	11"Dia x 3"E / Mushroom / 13W 900L / Triac Dim / 3000K
TFC11L14W1350LD12030K	11"Dia x 3"E / Mushroom / 14W 1350L / Triac Dim / 3000K
TFC14L14W1350LD12030K	14"Dia x 3"E / Mushroom / 14W 1350L / Triac Dim / 3000K
TFC14L23W1850LD12030K	14"Dia x 3"E / Mushroom / 23W 1850L / Triac Dim / 3000K

**CCT4**

Change 30K to 40K for 4000K. Consult for multi-volt and other wattage and lumen options.

## LED DRUM FIXTURE

CIRDC offers a clean, contemporary look, perfect for kitchens, hallways, laundry rooms, pantries, bathrooms, and general work areas.

ITEM NO.	DESCRIPTION
CIRDC11L13W900LD12030K	11"Dia x 3"E / Drum / 13W 900L / Triac Dim / 3000K
CIRDC11L14W1350LD12030K	11"Dia x 3"E / Drum / 14W 1350L / Triac Dim / 3000K
CIRDC14L14W1350LD12030K	14"Dia x 3"E / Drum / 14W 1350L / Triac Dim / 3000K
CIRDC14L23W1850LD12030K	14"Dia x 3"E / Drum / 23W 1850L / Triac Dim / 3000K

**CCT4**

Consult for multi-volt and other wattage and lumen options.

## LED DOME FIXTURE

HOTCE is a clean, stylized dome, suitable for a wide variety of residential and light commercial applications.

ITEM NO.	DESCRIPTION
HOTCE11L13W900LD12030K	11"Dia x 3.875"E / Dome / 13W 900L / Triac Dim / 3000K
HOTCE11L14W1350LD12030K	11"Dia x 3.875"E / Dome / 14W 1350L / Triac Dim / 3000K
HOTCE14L14W1350LD12030K	14"Dia x 4.25"E / Dome / 14W 1350L / Triac Dim / 3000K
HOTCE14L23W1850LD12030K	14"Dia x 4.25"E / Dome / 23W 1850L / Triac Dim / 3000K

**CCT4**

Change 30K to 40K for 4000K. Consult for multi-volt and other wattage and lumen options.

## LED SPILL RING CTC w/ SMARTSENSE

Provides adjustable soft illumination with dimming capability and occupancy sensing technology to fully illuminate areas when occupied and provide maximum cost savings when areas are not in use. The advanced microwave sensor technology has multiple sensor options available, including on/off sensor controlled, bi-level or adjustable standby, and even daylight sensing technology to ensure no is ever left in dark.

ITEM NO.	DESCRIPTION
SMHOTCD18L35W3300LMVSN(50)MCT	17.75"D x 5"H / 35W, 3300L / 0-10V Dim / Occupancy and Daylight Harvesting Sensor / Available in 3000K, 3500K or 4000K

**CCT3**

For Emergency version, add EM and \$100.

# Close-to-Ceiling



## ULTRA THIN EDGELIT DOWNLIGHT (WET LOCATION)

Choose either a round or square silhouette in two sizes and two finishes, white and brushed nickel with a special regressed lens to provide even, comfortable illumination from these edge-lit fixtures. Wet location for indoor and outdoor use. 120V only. Dims to 10% with standard dimmers.

ITEM NO.	DESCRIPTION
RCR5L10W660L30KBN	5.5"Dia x 0.625"H / LED Regressed Round Lens/ 10W, 660L / 120V Dim / 3000K / Brushed Nickel
RCR5L10W660L30KWH	5.5"Dia x 0.625"H / LED Regressed Round Lens/ 10W, 660L / 120V Dim / 3000K / White
RCR7L15W1000L30KBN	7"Dia x 0.625"H / LED Regressed Round Lens/ 15W, 1000L / 120V Dim / 3000K / Brushed Nickel
RCR7L15W1000L30KWH	7"Dia x 0.625"H / LED Regressed Round Lens/ 15W, 1000L / 120V Dim / 3000K / White
RCS5L10W660L30KBN	6.28"L x 0.625"H / LED Regressed Square Lens / 10W, 660L / 120V Dim / 3000K / Brushed Nickel
RCS5L10W660L30KWH	6.28"L x 0.625"H / LED Regressed Square Lens / 10W, 660L / 120V Dim / 3000K / White
RCS7L15W1000L30KBN	8"L x 0.625"H / LED Regressed Square Lens / 15W, 1000L / 120V Dim / 3000K / Brushed Nickel
RCS7L15W1000L30KWH	8"L x 0.625"H / LED Regressed Square Lens / 15W, 1000L / 120V Dim / 3000K / White

Lumens shown are gross lumens. Net lumens is 20% less.

## MICRO LED SURFACE MOUNT (WET LOCATION)

Low profile LED disc mounts directly to junction box or to 4" or 6" recessed housing to provide uniform look throughout your project. Easy dimming with standard dimmer. Wet location.



ITEM NO.	DESCRIPTION
SMC4L12W900L30KWH	4"(5.9"OD) x 1.2"H / Surface Mount / White Opal Acrylic Lens / 12W, 900L / 120V Dim / 3000K / White
SMC6L15W1100L30KWH	6"(7.4"OD) x 1.2"H / Surface Mount / White Opal Acrylic Lens / 15W, 1095L / 120V Dim / 3000K / White
SMC9L26W2100L30KWH	9"(9.5"OD) x 1.2"H / Surface Mount / White Opal Acrylic Lens / 26W, 1700L / 120V Dim / 3000K / White
SMC4RECACC	4in TORTIONITE ACCESSORY
SMC6RECACC	6in TORTIONITE ACCESSORY

Consult for bronze and satin nickel.

## SURFACE DISCS 11" AND 15" (WET LOCATION)

Large LED discs provide a sleek modern look to replace oversized flushmounts. These sealed fixtures are a great option for outdoor to prevent bug build up.



ITEM NO.	DESCRIPTION
SMC11L28W1700LD12030KWH	11"D x 1.2"H / Surface Mount / White Opal Acrylic Lens / 28W, 1700L / 120V Dim / 3000K / White
SMC11L28W1700LD12030KBN	11"D x 1.2"H / Surface Mount / White Opal Acrylic Lens / 28W, 1700L / 120V Dim / 3000K / Brush Nickel
SMC15L40W2500LD12030KWH	15"D x 1.2"H / Surface Mount / White Opal Acrylic Lens / 40W, 2500L / 120V Dim / 3000K / White
SMC15L40W2500LD12030KBN	15"D x 1.2"H / Surface Mount / White Opal Acrylic Lens / 40W, 2500L / 120V Dim / 3000K / Brush Nickel



## MULTI-FAMILY DISC (WET LOCATION)

The right value when using hundreds of discs on your project. Driver on board LED technology in 120V only makes it the right light for many projects.

ITEM NO.	DESCRIPTION
IRCR5L11W600L30KWH	Regressed CTC / 5.0in Dia / 11W, 600L / 120V Dim / 3000K / White
IRCR7L16W1000L30KWH	Regressed CTC/ 7.0in Dia / 16W, 1000L / 120V Dim / 3000K / White



## LED TAPERED DISK (WET LOCATION)

This new tapered Disk Light provides bright general illumination in a sleek, small, package, providing 75% energy savings while lasting 10X longer than conventional recessed downlights. Available in 3 finishes, and dimmable. Ideal for wet location applications.

ITEM NO.	DESCRIPTION
TDL6L15W1100L30KBA	7.375"D x 1.5"H / Tapered LED Disk / 15W, 1100L / 120V Dim / 3000K / Brushed Alum.
TDL6L15W1100L30KBZ	7.375"D x 1.5"H / Tapered LED Disk / 15W, 1100L / 120V Dim / 3000K / Bronze
TDL6L15W1100L30KWH	7.375"D x 1.5"H / Tapered LED Disk / 15W, 1100L / 120V Dim / 3000K / Matte White
TDL6RECACC	6in RECESSED CAN ACCESSORY

**CCT3**

Change 30K to 40K

## DISK LIGHT (DAMP LOCATION)

Tapered disk light provide bright illumination in a sleek, small package providing an economical alternative to a recessed downlight. 120V Dimmable and damp location.

ITEM NO.	DESCRIPTION
DSK6L15W1050L30KWH	.25"D x 1.0"H / Tapered LED Disk /15W, 1050L / 120V Dim / 3000K / Matte White



## LED TAPERED DISK WITH PULL CHAIN **NEW**

The popular low profile LED disk lights now available with a pull chain for those applications that require an integral on/off switch. Ideal for retrofit applications especially in closet and storage areas.


ITEM NO.	DESCRIPTION
TDL6L15W1100L30KBA-SW	7.375"D x 1.5"H / Tapered LED Disk / 15W, 1100L / 120V Dim / 3000K / Brushed Alum. with Pull Chain Switch
TDL6L15W1100L30KBZ-SW	7.375"D x 1.5"H / Tapered LED Disk / 15W, 1100L / 120V Dim / 3000K / Bronze with Pull Chain Switch
TDL6L15W1100L30KWH-SW	7.375"D x 1.5"H / Tapered LED Disk / 15W, 1100L / 120V Dim / 3000K / Matte White with Pull Chain Switch

# Citadel Enclosures

Citadel offers more versatility and benefits than any other weatherproof enclosure offered in North America. Fully compatible for LED applications and high efficiency lighting.

Citadels are available in a variety of sizes with a choice of different diffusers and accessories as well as price points to ensure the right fixture for your application.

Applications: Stairwell, Parking Garage, Under Awning, Garden Centers, Food Processing, Refrigeration, Indoor Pools, Livestock, Marinas, Open Bays, Freezers, and Construction Sites

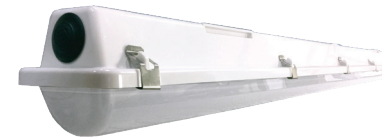

## CIT POLYCARBONATE SERIES

Economical, value enclosure to provide highly engaged harsh environment enclosure.

ITEM NO.	DESCRIPTION
CITPFR48LY30W4500LDMV40K	51.75"L X 4.10"W X 4.29"H ENCLOSURE 30W 4500 LUMENS

G120 90CRI CCT1

## ENCLOSED PARKING GARAGE (WET LOCATION)

A highly engineered LED lighting system designed for parking garages and other applications where weatherproof wide area lighting is required. Specially designed reflector provides wide spread light transmission with minimal glare.

ITEM NO.	DESCRIPTION
CITE48LFRY48W4800LPGDMV40K	51.81"L x 7.33"W x 4.13"H / Frosted Shallow Lens / 48W, 4800L / Parking Garage / 0-10V Dim / 4000K
CITE48LFRY57W5700LPGDMV40K	51.81"L x 7.33"W x 4.13"H / Frosted Shallow Lens / 57W, 5700L / Parking Garage / 0-10V Dim / 4000K
CITE48LFRY72W7000LPGDMV40K	51.81"L x 7.33"W x 4.13"H / Frosted Shallow Lens / 72W, 7000L / Parking Garage / 0-10V Dim / 4000K
CITE96LFRY57W5700LPGDMV40K	98.5"L x 7.33"W x 4.13"H / Frosted Shallow Lens / 57W, 5700L / Parking Garage / 0-10V Dim / 4000K
CITE96LFRY97W9700LPGDMV40K	98.5"L x 7.33"W x 4.13"H / Frosted Shallow Lens / 97W, 9700L / Parking Garage / 0-10V Dim / 4000K

EM3 G120 OS5 RGBW D1MV CCT1 SURF PEND WET

Consult for sensors. For stainless steel latches, add SL.



Ribbed Lens



Smooth Lens



Deep Lens

## ENCLOSED LOW BAY (WET LOCATION)

Engineered LED lighting system designed for exterior applications where weatherproof lighting is required. Tough diffuser resists breakage while providing excellent light transmission with minimal glare. Wet location.

ITEM NO.	DESCRIPTION
CITE24LRFV22W2500LLBDMV40K	27.68"L x 7.33"W x 4.13"H / Ribbed Lens / 22W, 2500L / Lowbay / 0-10V Dim / 4000K
CITE24LFRF24W2700LLBDMV40K	27.68"L x 7.33"W x 4.13"H / Frosted Lens / 24W, 3000L / Lowbay / 0-10V Dim / 4000K
CITE24LFRF28W3300LLBDMV40K	27.68"L x 7.33"W x 4.13"H / Frosted Lens / 28W, 3500L / Lowbay / 0-10V Dim / 4000K
CITE48LFRY25WDMV40K	51.81"L x 7.33"W x 4.13"H / Ribbed Lens / 25W, 3990L / Lowbay / 0-10V Dim / 4000K
CITE48LFRY35WDMV40K	51.81"L x 7.33"W x 4.13"H / Frosted Lens / 35W, 5480L / Lowbay / 0-10V Dim / 4000K
CITE48LFRY52WDMV40K	51.81"L x 7.33"W x 4.13"H / Frosted Lens / 52W, 8000L / Lowbay / 0-10V Dim / 4000K
CITE96LFRY50WDMV40K	98.51"L x 7.33"W x 4.13"H / Ribbed Lens / 50W, 7980L / Lowbay / 0-10V Dim / 4000K
CITE96LFRY70WDMV40K	98.51"L x 7.33"W x 4.13"H / Frosted Lens / 70W, 10970L / Lowbay / 0-10V Dim / 4000K
CITE96LFRY108WDMV40K	98.51"L x 7.33"W x 4.13"H / Frosted Lens / 108W, 16010L / Lowbay / 0-10V Dim / 4000K



Consult for sensors. Consult for stainless steel latches.

Consult for New Narrow Economy Version 48 inch.

Acrylic Lens Options	2ft	4ft	8ft
RF Ribbed Frosted	✓	✓	✓
LB Linear Ribbed	✓	✓	✓
CL Clear Shallow		✓	
FR Frosted Shallow		✓	
OL Clear Deep Lens	✓	✓	✓
FL Frosted Deep Lens	✓	✓	✓

\*Add "P" in front of Lens options above for Polycarbonate. Consult for pricing adders on these.

Deep Lens not available for CITN.



## LED VAPORTIGHT (WET LOCATION)

ITEM NO.	DESCRIPTION
CITN48LRFJ48W5000LLBDMV40K	51.81"L x 4.4"W x 4.13"H / Ribbed Lens / 48W, 5000L / Lowbay / 0-10V Dim / 4000K

EM3 G120 OS6 RGBW D1MV CCT1 SURF PEND WET

# Citadel Enclosures



## VAPOR TIGHT HIGH BAY WET LOCATION

Demanding environments call for this tough, enclosed and gasketed, high bay fixture. For use in both indoor and outdoor applications, appropriate for damp and wet locations, as well as for protection against dust and other non-hazardous contaminants. Ideal for food industry, cold storage, warehouses, parking garages, commercial kitchens, car washes, utility tunnels, laundries and industrial facilities. IP67, NEMA 4X.

ITEM NO.	DESCRIPTION
CITACL48LV80W9700LDMV50K	51.87"L x 14.44"W x 4.63"H / Clear with Matte White Ends Lens / 80W, 9700L / 0-10V Dim / 5000K
CITACL48LA120W15500LDMV50K	51.87"L x 14.44"W x 4.63"H / Clear with Matte White Ends Lens / 120W, 15500L / 0-10V Dim / 5000K
CITACL48LA140W18000LDMV50K	51.87"L x 14.44"W x 4.63"H / Clear with Matte White Ends Lens / 140W, 18000L / 0-10V Dim / 5000K
CITACL48LA150W19500LDMV50K	51.87"L x 14.44"W x 4.63"H / Clear with Matte White Ends Lens / 150W, 19500L / 0-10V Dim / 5000K
CITACL48LA180W23200LDMV50K	51.87"L x 14.44"W x 4.63"H / Clear with Matte White Ends Lens / 180W, 23200L / 0-10V Dim / 5000K

EM6 G120 OS1 RGBW D1MV 90CRI CCT1 X1LED FLUOR

See specification sheet for mounting options and accessories. CL is Clear Acrylic Lens, change to FR for Frosted Acrylic Lens. For Polycarbonate Versions add PC after CL or FR.

## VAPOR TIGHT LOW BAY WET LOCATION

A low bay version and lower output of the above fixture. IP67, NEMA 4X.

ITEM NO.	DESCRIPTION
CITACL24LV80W8000LDMV50K	26.6"L x 14.5"W x 5.8"H / Clear with Matte White Ends Lens / 80W, 8000L / 0-10V Dim / 5000K
CITACL24LV100W10000LDMV50K	26.6"L x 14.5"W x 5.8"H / Clear with Matte White Ends Lens / 100W, 10000L / 0-10V Dim / 5000K
CITACL24LV140W14000LDMV50K	26.6"L x 14.44"W x 5.8"H / Clear with Matte White Ends Lens / 140W, 14000L / 0-10V Dim / 5000K

EM3 G120 OS6 RGBW D1MV CCT1 SURF PEND

See specification sheet for mounting options and accessories. CL is Clear Acrylic Lens, change to FR for Frosted Acrylic Lens. For Polycarbonate Versions add PC after CL or FR.



Frosted Lens option (FR) provides soft, glare-free lighting.

Citadel High Bay is ideal for food processing areas where a wash down fixture with abundant lighting is required.



# X1LED

Add PC4 to switch up and down separately.



## CITADEL ENCLOSURES

ITEM NO.	DESCRIPTION
CITCL232X1LN18W40	4ft. Enclosure w/Clear Lens 4200 Lumen 2x18W LED T8 4000K Lamps Included
CITCL332X1LN18W40	4ft. Enclosure w/Clear Lens 6300 Lumen 2x18W LED T8 4000K Lamps Included
CITLB2328X1LN18W40	8ft. Enclosure w/Linear Ribbed Lens 8200 Lumen 4x18W LED T8 4000K Lamps Included

EM9 OS6 CCT2 LED FLUOR X1LEDT8D

Consult for different lens options and sensors. Change CL lens on 4ft to LB (linear ribbed) to match 8 ft. lens.

## WIDE BODY GARAGE LIGHT

ITEM NO.	DESCRIPTION
CITOL332 SBA3X1LN18W40	4 FT Deep Clear Enclosure 6300 Lumens with 4200 lumens for wide distribution and 2100 lumens for downlight. 3x18W LED T8 4000K lamps included. Surface Mounting brackets.
CITOL332 SBA3X1LN18W40MDT4(21) (Pictured)	4 Ft Deep Clear Enclosure 6300 Lumens with 4200 lumens for wide distribution and 2100 lumens for downlight. 3x18W LED T8 4000K lamps included. Surface Mounting brackets and Occupancy Sensor included. Occupancy sensor wired to two wide area lamps.

EM9 OS6 CCT2 LED FLUOR X1LEDT8D

MDT4 is for Standard Indoor Occupancy Sensor. For Wet Location change to MDT4W or for Cold Weather Sensor change to MDT4C. Change 40 to 35 or 50 for different Kelvin. Change Lamp to 15W on 4FT. Consult for different lens and mounting options.



## VAPOR TIGHT HIGH BAY WET LOCATION

(IDEAL FOR COLD STORAGE AND WASH DOWN) IP65, IP66 IP67, NEMA 4X

ITEM NO.	DESCRIPTION
CITA432X1LN18W40	14.61" x 51.91" Enclosure w/Clear Lens 8400 Lumen 4x18W LED T8 4000K Lamps Included
CITA632X1LN18W40	14.61" x 51.91" Enclosure w/Clear Lens 12600 Lumen 6x18W LED T8 4000K Lamps Included

EM3 OS6 CCT2 LED FLUOR X1LEDT8D

See specification sheet for mounting options and accessories. CL is Clear Acrylic Lens, change to FR for Frosted Acrylic Lens. For Polycarbonate Versions add PC after CL or FR.



# Enclosures



Standard 3/4" hub allows standard electrical accessories for installation.

## OUTDOOR SIGN LIGHTER 3/4" HUB (WET LOCATION)


This spec-grade sign lighter rotates up to 360° and is constructed from sealed, powder-coated aluminum extrusion with a lens, suitable for parking and commercial/retail outdoor areas, for sign and walkway lighting. 3/4" Hub. Wet location.

ITEM NO.	DESCRIPTION
OSL48LY48W5900LDMV40K	54.5"L x 5.25"W x 3.06"H / Clear Lens / 48W, 5900L / 0-10V Dim / 4000K
OSL48LY57W6500LDMV40K	54.5"L x 5.25"W x 3.06"H / Clear Lens / 57W, 6500L / 0-10V Dim / 4000K
OSL96LY114W13000LDMV40K	102.5"L x 5.25"W x 3.06"H / Clear Lens / 114W, 13000L / 0-10V Dim / 4000K
OSL96LY96W11800LDMV40K	102.5"L x 5.25"W x 3.06"H / Clear Lens / 96W, 11800L / 0-10V Dim / 4000K

EM3 G120 RGBW DIMV CCT1 SURF PEND WET

## LINEAR VANDAL RESISTANT (DAMP LOCATION)

This wraparound LED fixture is designed for high-abuse areas such as parking garages and school corridors and features an injection-molded UV-stabilized 100% clear, polycarbonate, prismatic lens.

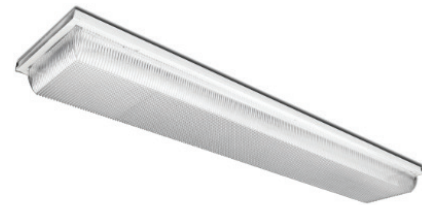

ITEM NO.	DESCRIPTION
CV800LY48W4800LDMV50K	50.25"L X 8.25"W X 4.5"H / Clear Polycarbonate Lens / 48W, 4800L / 0-10V Dim / 5000K
CV800LY72W7200LDMV50K	50.25"L X 8.25"W X 4.5"H / Clear Polycarbonate Lens / 72W, 7200L / 0-10V Dim / 5000K

EM3 G120 RGBW DIMV CCT1 SURF WET

## PROFILE (WET LOCATION)

The new Profile series is ideal for low bay area lighting where wet rated enclosures are required. Co-extruded 5VA plastic housing and lens ensure a fully encapsulated enclosure. IP66.



Consult for clear frosted end caps.

ITEM NO.	DESCRIPTION
PRO24LZ24W2500LDMV40KBK	24"L x 4.16"W x 4.44"H / Matte White Lens / 24W, 2500L / 0-10V Dim / 4000K / Black End Caps / Grey Housing
PRO48LZ48W5000LDMV40KBK	48"L x 4.16"W x 4.44"H / Matte White Lens / 48W, 5000L / 0-10V Dim / 4000K / Black End Caps / Grey Housing
PRO96LZ96W10000LDMV40KBK	96"L x 4.16"W x 4.44"H / Matte White Lens / 96W, 10000L / 0-10V Dim / 4000K / Black End Caps / Grey Housing

EM3 G120 OS6 RGBW DIMV CCT1 SURF PEND WET

## LED CANOPY (WET LOCATION)

The economical CPY is a sealed, die-cast, low profile for indoor and outdoor applications. Ideal for parking garages but also works well for storage areas, shopping area walkways and other low security applications.



ITEM NO.	DESCRIPTION
CPY10L27W3800LDMV50K	9.52"L x 9.52"W x 3.19"H / Clear Polycarbonate Lens / 27W, 3800L / 0-10V Dim / 5000K / Bronze
CPY10L40W5400LDMV50K	9.52"L x 9.52"W x 3.19"H / Clear Polycarbonate Lens / 40W, 5400L / 0-10V Dim / 5000K / Bronze
CPY10L60W8000LDMV50K	9.52"L x 9.52"W x 3.19"H / Clear Polycarbonate Lens / 60W, 8000L / 0-10V Dim / 5000K / Bronze

Available in both 50k and 40k.

## WET LOCATION CLOSE-TO-CEILING

This wet location fixture is available Round (1303) or Square (1302), with black or white housing and white lens. Is ideal for lighting residential exteriors, entry ways, stairways, walkways, perimeters, parking garages, storage areas, and warehouses.



F1303 - Round



F1302 - Square

ITEM NO.	DESCRIPTION
F13032INCLPLEDWH	ROUND CEILING WET / 9.375" Dia x 4.5"H / 2 x LED Lamp 9.5W A19 30K Incl. / 120V Dim / White
F1303L22W1824LMVWH40K	ROUND CEILING WET / 9.375" Dia x 4.5"H / 22W, 1824L / 120-277V / 4000K / White
F1303L23W1900LD120WH40K	ROUND CEILING WET / 9.375" Dia x 4.5"H / 23W, 1900L / 120V Dim / 4000K / White
F13022INCLPLEDWH	SQUARE CEILING WET / 10"L x 10"W x 4.5"H / 2 x LED Lamp 9.5W A19 30K Incl. / 120V Dim / White
F1302L22W1824LMVWH40K	SQUARE CEILING WET / 10"L x 10"W x 4.5"H / 22W, 1824L / 120-277V / 4000K / White
F1302L23W1900LD120WH40	SQUARE CEILING WET / 10"L x 10"W x 4.5"H / 23W, 1900L / 120V Dim / 4000K / White

For 3000K change 40K to 30K. For Black body, change WH to BK. See LED Lamp spec on page 114.

## UTILITY LED



ITEM NO.	DESCRIPTION
SWPFRACINCLPLED	Small Wall Pack 5" x 8" Incand. socket & LED Lamp 9.5W A19 30K Incl. White Dimmable 120V
SWPFRACL13W1000LD12040K	Small Wall Pack 13W 1000L White Dimmable 120V
MWPFRACINCLPLED	Medium Wall Pack, Incand. socket & LED Lamp 9.5W A19 30K Incl. White 6" x 10.8" Dimmable 120V
MWPFRACL13W1000LD12040K	Medium Wall Pack 13W 1000L White Dimmable 120V
LWPF15W1500LMV40K	Large Wall Pack Clear Lens 15W 1500L Multi-Volt 40K

For 3000K change 40K to 30K.

## OUTDOOR WET LOCATION WALL/CEILING

The new OUT general-use, wet-location ceiling and wall fixture provides maintenance-free and bug-free illumination for commercial and residential applications. Its simple, sleek design, die-cast backplate, and rugged acrylic lens makes it the ideal solution for almost any outdoor application. Bug Proof. IP65. Eyelid version provides direct light only.



ITEM NO.	DESCRIPTION
OUTMW15W1200LD120WH40K	Round 12" Dia x 3.61"Depth / White Acylic Lens / 15W, 1200L / 120V Dim / 4000K / White
OUTMW15W1200LD120BK40K	Round 12" Dia x 3.61"Depth / White Acylic Lens / 15W, 1200L / 120V Dim / 4000K / Black
OUTEYMW15W1200LD120WH40K	Round EYELID 12" Dia x 3.61"Depth / White Acylic Lens / 15W, 1200L / 120V Dim / 4000K / White
OUTEYMW15W1200LD120BK40K	Round EYELID 12" Dia x 3.61"Depth / White Acylic Lens / 15W, 1200L / 120V Dim / 4000K / Black



# Exterior Wall Packs & Floods

LED wall packs and floods are perfect for illuminating pathways and perimeters, giving people a greater sense of security. And whether you're looking for a traditional non-cut off, high-output, fixed-cutoff, architectural, or slim-sized fixture, we've got them all. Each is so easy to install with a full assortment of accessories for most applications. Energy efficiency, durability, optics and fresh aesthetics distinguish our offering. Poles available for certain markets along with bollards and other specialty commercial exterior fixtures to illuminate your next exterior project.



## LED CUTOFF WALL PACK

Full cutoff LED wall pack. DLC listed.

ITEM NO.	DESCRIPTION
DCC150E27W3950LMV50K	14.21"L x 9.25"W x 8.78"Dp / 27W, 3950L / 0-10V Dim / 5000K / Bronze
DCC150E45W6450LMV50K	14.21"L x 9.25"W x 8.78"Dp / 45W, 6450L / 0-10V Dim / 5000K / Bronze
DCC150E70W9900LMV50K	14.21"L x 9.25"W x 8.78"Dp / 70W, 9900L / 0-10V Dim / 5000K / Bronze
DCC200E90W12200LMV50K	18.10"L x 10.81"W x 11.24"Dp / 90W, 12200L / 0-10V Dim / 5000K / Bronze
DCC200E135W18000LMV50K	18.10"L x 10.81"W x 11.24"Dp / 135W, 18000L / 0-10V Dim / 5000K / Bronze

**CCT6**

Available in 40K and 50K, consult for 40K option.

## DARK SKY WALL PACK (DLC SERIES)

This new sleek design puts the light where you need it without creating any unnecessary spill light. One size allows for multiple light levels and a switch easily changes the color temperature.



**CCT6**

Available in 40K and 50K, consult for 40K option.

ITEM NO.	DESCRIPTION
DCL150L65M9700LDMVMCT	13.1"L x 9.6"W x 3.8"Dp /65W, 9700L / CCT 30K/40K/50K / Bronze
DCL200L100M15000LDMVMCT	13.1"L x 9.6"W x 5"Dp /65W, 15000L / CCT 30K/40K/50K / Bronze



## WALL PACK

Great value wall pack with shields, photocell, and em options.


ITEM NO.	DESCRIPTION
DC120L45M5600LDMV50KBZ	11.95"L x 7.7"W x 6.23"Dp /45W, 5600L /NON-Dim /5000K / Bronze
DC150L30W3500LMV50K	14.2"L x 9.25"W x 7.08"Dp /30W, 3500L /NON-Dim /5000K / Bronze
DC150L40W5100LMV50K	14.2"L x 9.25"W x 7.08"Dp /40W, 5100 L /NON-Dim /5000K / Bronze
DC150L65W7900LMV40K	14.2"L x 9.25"W x 7.08"Dp /65W, 7900L /NON-Dim /5000K / Bronze
DC150L90W10000LMV50K	14.2"L x 9.25"W x 7.08"Dp /90W, 10500L /1-10V Dim /5000K / Bronze
DC150L125W15000LMV50K	14.2"L x 9.25"W x 7.08"Dp /125W, 15000L /1-10V Dim /5000K / Bronze
DCL150L65M7800MDMVMCT	14.2"L x 9.25"W x 7.08"Dp /100/80/60/40W /1-10V Dim / CCT 3/4/5000k /Bronze
DCL150L100M12000MDMVMCT	14.2"L x 9.25"W x 7.08"Dp / 65/52/39/26W /1-10V Dim /CCT 3/4/5000k/Bronze
DC150SRSHIELD	Shield for DC150SR / 13"L x 10"W x 9.25"H

**CCT6**

\*MCT can be changed to 3000K/4000K/ 5000K

## LED ADJUSTABLE WALL PACK

The AWP series of luminaires provides a low profile architectural style with the power of bright, energy efficient LEDs. It has a rugged aluminum construction with multi-mount capabilities.



ITEM NO.	DESCRIPTION
AWP7L27W3600LDMV50KBZ	9.13"L x7.29"W /27W, 3600L /NON-Dim /5000K / Bronze
AWP7L40W5400LDMV50KBZ	9.13"L x7.29"W /40W, 5200L /NON-Dim /5000K / Bronze
AWP10L67W8800LDMV50KBZ	11.02"L x10.06"W /67W, 8800L /NON-Dim /5000K / Bronze
AWP10L80W10500LDMV50KBZ	11.02"L x10.06"W /80W, 10500L /1-10V Dim /5000K / Bronze

Available in both 50k and 40k



## MINI LED WALL PACK

2 lumen packages for just right light. High efficacy and available photocell for greater savings.

ITEM NO.	DESCRIPTION
DC056L17W2000LMV50K	5.484"W x 3.523"E x 8.384"H / 17W, 2000L / 120-277V / 5000K / Bronze / Frosted Lens
DC056L17W2000LMV50KPC	5.484"W x 3.523"E x 8.384"H / 17W, 2000L / 120-277V / 5000K / Bronze / Photocell / Frosted Lens
DC056L17W2000LMV50KPCCL	5.484"W x 3.523"E x 8.384"H / 25W, 2700L / 120-277V / 5000K / Bronze / Clear Lens
DC056L25W2700LMV50KPCCL	5.484"W x 3.523"E x 8.384"H / 25W, 2700L / 120-277V / 5000K / Bronze / Photocell / Clear Lens

# Exterior Wall Packs & Floods



SDF Series with Trunnion



LDF series with slipfitter



MDF Series with Knuckle Mount



LDF 250W or 350W with Trunion

## MEDIUM AND LARGE LED FLOOD

High performance LED floods with multiple mounting options. Wet rated housing with scalable lumen packages allows for full project uniformity.

ITEM NO.	DESCRIPTION
SDF6L15W2000LMV50KBZKN	6.56"L x 5.98"W x 2.55" H / 15W, 2000L / 5000K / Bronze
SDF6L27W3600LMV50KBZKN	6.56"L x 5.98"W x 2.55" H / 27W, 3600L / 5000K / Bronze
MDF6L45W5650LMV50KBZKN	7.5"L x 7.95"W x 3.12" H / 45W, 5650L / 5000K / Bronze
MDF6L60W7450LMV50KBZKN	7.5"L x 7.95"W x 3.12" H / 60W, 7450L / 5000K / Bronze
LDF6L70W8900LMV50KBZKN	14.21"L x 11.06"W x 4.9" H / 70W, 8900L / 1-10V Dim / 5000K / Bronze
LDF6L100W13300LMV50KBZKN	14.21"L x 11.06"W x 4.9" H / 100W, 13300L / 1-10V Dim / 5000K / Bronze
LDF6L135W18000LMV50KBZKN	14.53"L x 8.98"W x 4.37" H / 135W, 18000L / 1-10V Dim / 5000K / Bronze
LDF6L200W26200LMV50KBZKN	14.53"L x 8.98"W x 4.37" H / 200W, 26200L / 1-10V Dim / 5000K / Bronze
LDF6L350W50000LMV50KBZKN	17.99"L x 14.53"W x 5.23" H / 350W, 50000L / 1-10V Dim / 5000K / Bronze

Available in both 50k and 40k. For Yoke mount, change SF to YK.

## AREA LIGHT

Outstanding photometric performance, uniform illumination and low profile form providing a 100,000+ L70 lifespan.


Order Mounting Accessories separately below.



ITEM NO.	DESCRIPTION
PFF12L40W5500LDMV50K	21.1"L x 9.25"W x 3.35" D / 40W, 5500L/0-10Dim / 120-277V / 5000K/Bronze / T3 Dist
PFF12L70W9600LDMV50K	21.1"L x 9.25"W x 3.35" D / 70W, 9600L/0-10Dim / 120-277V / 5000K/Bronze / T3 Dist
PFF12L100W13800LDMV50K	21.1"L x 9.25"W x 3.35" D / 100W, 13800L/0-10Dim / 120-277V / 5000K/Bronze / T3 Dist
PFF15L150W20800LDMV50K	22.8"L x 12.24"W x 3.35" D / 150W, 20800L/0-10Dim / 120-277V / 5000K/Bronze / T3 Dist
PFF15L200W26000LDMV50K	22.8"L x 12.24"W x 3.35" D / 200W, 26000L/0-10Dim / 120-277V / 5000K/Bronze / T3 Dist
PFF23L250W34500LDMV50K	31"L x 12.25"W x 3.35" D / 250W, 34500L/0-10Dim / 120-277V / 5000K/Bronze / T3 Dist
PFF23L300W41000LDMV50K	31"L x 12.25"W x 3.35" D / 300W, 41000L/0-10Dim / 120-277V / 5000K/Bronze / T3 Dist

## MOUNTING ACCESSORIES FOR PFF SERIES

ITEM NO.	DESCRIPTION
PFFSW	Slip fitter mounting arm for PFF Series Bronze
PFFSARM	Square pole mounting arm for PFF Series Bronze
PFFRARM	Round pole mounting arm for PFF Series Bronze
PFFWARM	Wall Mounting for PFF Series Bronze

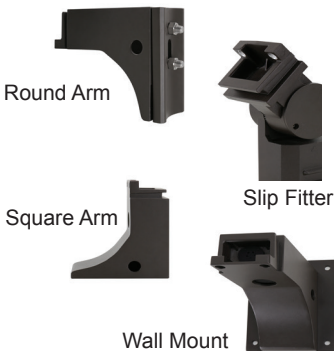

## SPECIFICATION AREA LIGHT

Low profile, rugged area light with optics precisely designed to shape the distribution, maximizing efficiency and application spacing. Optics control spill light and conform to dark sky requirements. Order mounting accessories separately.


ITEM NO.	DESCRIPTION
PMF15L100W14200LDMV50K	24.25"L x 13"W x 2.8" D / 100W, 14200L/0-10Dim / 120-277V / 5000K/Bronze / T3 Dist
PMF15L150W21200LDMV50K	24.25"L x 13"W x 2.8" D / 150W, 21200L/0-10Dim / 120-277V / 5000K/Bronze / T3 Dist
PMF15L200W28000LDMV50K	24.25"L x 13"W x 2.8" D / 200W, 28000L/0-10Dim / 120-277V / 5000K/Bronze / T3 Dist
PMF15L240W34000LDMV50K	33.5"L x 13.39"W x 2.8" D / 240W, 34000L/0-10Dim / 120-277V / 5000K/Bronze / T3 Dist
PMF15L300W42500LDMV50K	33.5"L x 13.39"W x 2.8" D / 300W, 42500L/0-10Dim / 120-277V / 5000K/Bronze / T3 Dist
PMF15L350W50000LDMV50K	33.5"L x 13.39"W x 2.8" D / 350W, 50000L/0-10Dim / 120-277V / 5000K/Bronze / T3 Dist

**CCT6**

For Programmable Sensor that can be controlled remotely, add SS to beginning of the item number. Default with T3 distribution, available in T4 and T5 distribution. Available in both 50k and 40k. Available in 480v. Add "PC" for adding photocell.

## MOUNTING ACCESSORIES FOR PMF SERIES

ITEM NO.	DESCRIPTION
PMFSW	Slip fitter mounting arm for PMF Series Bronze
PMFSARM	Square pole mounting arm for PMF Series Bronze
PMFRARM	Round pole mounting arm for PMF Series Bronze
PMFWARM	Wall Mounting for PMF Series Bronze

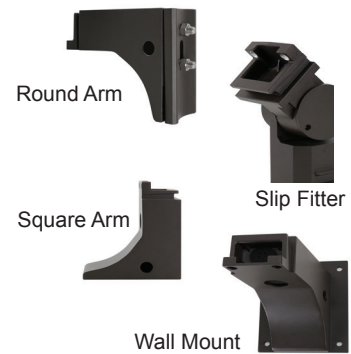

See wet location linear CWLL on page 24.

# Outdoor

## STEEL POLES

- 12 top holes w/polycarbonate lexan brushings
- Reinforced hand hold cover
- Anchor Bolts and Template Included
- Easily Secured base cover
- Bronze polyester powder-coat finish
- Meets ASTM 500 standard
- Pole cap is included



Pole does not include tenon.  
Poles can be cut to any length.



Tenon Top Adapter  
TEN4  
TEN5



TBZ180\*

\*Requires TEN4 or TEN5



TB490\*




TC4  
TC5

Anchor Bolts



AB3/4X30  
AB1X36



BC4  
BC5


Wall Mount Vertical




WM90

ITEM NO.	DESCRIPTION
SPS16411	STEEL POLE SPS 16ft 4in SQ 11 GAUGE BZ
SPS20411	STEEL POLE SPS 20ft 4in SQ 11 GAUGE BZ
SPS25411	STEEL POLE SPS 25ft 4in SQ 11 GAUGE BZ
SPS30511	STEEL POLE SPS 30ft 5in SQ 11 GAUGE BZ

### Template 4" Poles

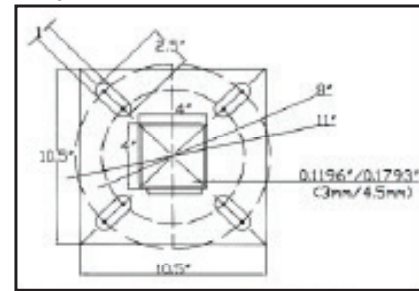

### Template 5" Poles

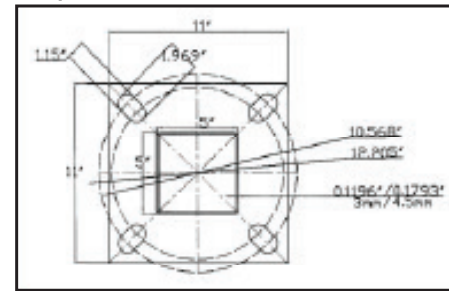

ITEM NO.	DESCRIPTION
TEN4	TENON TOP ADAPTER 4inX4in
TEN5	TENON TOP ADAPTER 5inX5in
TB2180	2 Light Straight Square Bullhorn / 43" Wide / 2.375" Tenon mount / Bronze
TB3120	3 Tenons at 120°
TBL3180	3 Tenons In-Line
TBL4180	4 Tenons In-Line
TB490	4" X 4" / 4 Light Square Bullhorn / Bronze
TC4	4" X 4" Square Pole Top Cap
TC5	5" X 5" Square Pole Top Cap
BC4	Anchor Bolt Cover for 4" x 4" Square Pole
BC5	Anchor Bolt Cover for 5" x 5" Square Pole
AB3/4X30	Anchor Bolt 0.75" x 30" X 0.75" with Nut and Washers (4 per pole)
AB1X36	Anchor Bolt 1" x 36" X 4" with Nut and Washers (4 per pole)
WM90	Wall Mount Vertical

## LED COMMERCIAL BOLLARDS

This attractive, newly redesigned heavy-duty bollard features full proof aluminum construction housing, providing corrosion and vandal resistance. A solid foundation withstands the elements, driver options work in even the worst weather conditions.



BOLPF BOLPR



ITEM NO.	DESCRIPTION
BOLPF18W2500LMV40KBZ	LED Flat Top Bollard / 18W, 2500L / 120V-277V / 4000 / Bronze
BOLPF38W4300LMV40KBZ	LED Flat Top Bollard / 38W, 4300L / 120V-277V / 4000 / Bronze
BOLPR18W2500LMV40KBZ	LED Round Top Bollard / 18W, 2500L / 120V-277V / 4000K / Bronze
BOLPR38W4300LMV40KBZ	LED Round Top Bollard / 38W, 4300L / 120V-277V / 4000K / Bronze

# Hanging Kits

### Chain



S Hook



Tong Hangers



G310



G315



HC401



HC605



HC301



ITEM NO.	DESCRIPTION
<b>For ALL HIGHBAY</b>	
HC101	Chain kit with 20' chain & (6) S Hooks
HC102	Jack chain (per foot)
HC103	S Hook, Set of 2
HC202	Tong hangers only, End mount (Tong Hooks Pointed Forward), Set of 2
HC203	Tong hangers only, Side mount (Tong Hooks Pointed to Center), Set of 2
HC204	Chain kit with (2) 10' Chain and (1) HC202
GT310	Cable kit with (2) 10' aircraft cable
GT315	Cable kit with (2) 15' aircraft cable
SCS24WH	One stem white kit with (1) 24" stem, (1) canopy and mounting hardware for a 4' fixture
2SCS24WH	Two stems white kit with (2) 24" stem, (2) canopy and mounting hardware for a 4' fixture
<b>For LPLIN, PLIN, SLP</b>	
HC401WH	Cable kit with (2) 4' aircraft cable, (1) 3 wires white power feed and (2) white canopy
HC402WH	Cable kit with (2) 12' aircraft cable, (1) 3 wires white power feed and (2) white canopy
HC4015WWH	Cable kit with (2) 4' aircraft cable, (1) 5 wires white power feed and (2) white canopy
HC4025WWH	Cable kit with (2) 12' aircraft cable, (1) 5 wires white power feed and (2) white canopy
HC401WHNPF	Cable kit with (1) 4' cable & (1) white canopy (non-power feed only)
HC402WHNPF	Cable kit with (1) 12' cable & (1) white canopy (non-power feed only)
<b>For LLL</b>	
HC601WH	Cable kit with (2) 6' aircraft cable, (1) 5 wires clear power feed and (2) white canopy
HC601WH	Cable kit with (2) 12' aircraft cable, (1) 5 wires clear power feed and (2) white canopy
<b>For L23, LAB, LLLSF, LLLSG</b>	
HC605WH	Cable kit with (2) 6' aircraft cable, (1) 5 wires clear power feed and (2) white canopy
HC612WH	Cable kit with (2) 12' aircraft cable, (1) 5 wires clear power feed and (2) white canopy
HC605WHNPF	Cable kit with (1) 4' cable & (1) white canopy (non-power feed only)
HC612WHNPF	Cable kit with (1) 12' cable & (1) white canopy (non-power feed only)
<b>For the Others</b>	
HC301WH	Cable kit with (2) 4' aircraft cable, (1) 3 wires white power feed and (2) white canopy
HC302WH	Cable kit with (2) 12' aircraft cable, (1) 3 wires white power feed and (2) white canopy
HC3015WWH	Cable kit with (2) 4' aircraft cable, (1) 5 wires white power feed and (2) white canopy
HC3025WWH	Cable kit with (2) 12' aircraft cable, (1) 5 wires white power feed and (2) white canopy
HC301WHNPF	Cable kit with (1) 4' cable & (1) white canopy (non-power feed only)
HC302WHNPF	Cable kit with (1) 12' cable & (1) white canopy (non-power feed only)
<b>Harness - Use for all, except L23 and LLL series</b>	
PI1	3 wires harness, including white, black and green
PI2	4 wires harness, including white, black, green and blue for emergency battery backup
PI3D	5 wires harness, including white, black, green, violet and pink
PI4D	6 wires harness, including white, black, green, violet and pink and blue for emergency battery backup

# Exit / Emergency

The brightly lit Emergency Lights and Exit Signs are slim, low-profile emergency lighting solutions that provide a crisp, clean look and excellent energy-saving benefits of LED technology.

Choice of the most common exit and emergency from the most common applications to the specialty requirements. Choice of materials and value options. These LED emergency lights are ideal for buildings, offices and a broad range of commercial facilities.



## THIN DIE-CAST LED EXIT SIGN

ITEM NO.	DESCRIPTION
KZXTEU1GAEM	Thin Die Cast, SF, Green, Battery Backup, Al face, Al body
KZXTEU1RAEM	Thin Die Cast, SF, Red, Battery Backup, Al face, Al body

## THERMOPLASTIC LED EDGELIT EXIT SIGN

ITEM NO.	DESCRIPTION
PLELRXTEU1RCAEM	Plastic Edge-Lit, SF, Red, Clear, Silver Housing, Battery Backup
PLELRXTEU1RCWEM	Plastic Edge-Li, SF, Red, White Housing, Battery Backup

## COMPACT LED EXIT SIGN



ITEM NO.	DESCRIPTION
EZRXTU2GWEM	Rounded EXIT, SF/DF, Green, Backup
EZRXTU2RWEM	Rounded EXIT, SF/DF, Red, Battery Backup

## ALUMINUM LED EDGELIT EXIT SIGN



ITEM NO.	DESCRIPTION
ELXTEU1GCAEM	Edge-Lit LED Exit Battery Backup, Single Face Green/Clear, 120/277V
ELXTEU1RCAEM	Edge-Lit LED Exit Battery Backup, Single Face Red/Clear, 120/277V
ELXTERPANEL ELXTEGPANEL	Edge-Lit LED Exit Single Face Green/Clear, 120/277V

## THIN THERMOPLASTIC EXIT SIGN



ITEM NO.	DESCRIPTION
EZXTEU2GW	LED Exit AC Only Sgl/Dbf Face Univ. Green Letters, White Housing, 120/277V
EZXTEU2GWEM	LED Exit w/Battery Backup Sgl/Dbf Face Univ. Green Letters White Housing, 120/277V
EZXTEU2GWEMRC	LED Exit w/Battery Backup Sgl/Dbf Face Univ. Green Letters White Housing, Remote Capable 120/277V
EZXTEU2RW	LED Exit AC Only Sgl/Dbf Face Univ. Red Letters, White Housing, 120/277V
EZXTEU2RWEM	LED Exit w/Battery Backup Sgl/Dbf Face Univ. Red Letters, White Housing, 120/277V
EZXTEU2RWEMRC	LED Exit w/Battery Backup Sgl/Dbf Face Univ. Red Letters, White Housing, Remote Capable 120/277V



## COMPACT WET LOCATION LED EXIT SIGN

ITEM NO.	DESCRIPTION
WLEZXTEU1GGEMCW	Wet location Exit sign, single face, green letters, gray housing, white face plate, battery back up, cold weather incl'd
WLEZXTEU1RGEMCW	Wet location Exit sign, single face, red letters, gray housing, white face plate, battery back up, cold weather incl'd
WLEZXTEU2GGEMCW	Wet location Exit sign, double face, green letters, gray housing, white face plate, battery back up, cold weather incl'd
WLEZXTEU2RGEMCW	Wet location Exit sign, double face, red letters, gray housing, white face plate, battery back up, cold weather incl'd

# Combos (Exit and Emergency)



## ALL LED EXIT & EMERGENCY COMBO

ITEM NO.	DESCRIPTION
LEDCXTEU2RW	White LED Combo, SF/DF, Red, White
LEDCXTEU2RWRC	White LED Combo, SF/DF, Red, White, Remote Capable



## LED EMERGENCY UNIT

ITEM NO.	DESCRIPTION
LEDR1	LED Emergency Light, White
LEDR1B	LED Emergency Light, black
LEDR1SDT	LED Emergency Light, White, SDT

## LED EXIT & INCANDESCENT EMERGENCY COMBO

ITEM NO.	DESCRIPTION
CXTEU2GW	COMBO LED Exit/Emerg. Light Sgl/Dbf Face Green Letters White Housing, 120/277V
CXTEU2GWRC	COMBO LED Exit/Emerg. Light Sgl/Dbf Green Letters, white housing, w/Remote Capability, 120/277V
CXTEU2RW	COMBO LED Exit/Emerg. Light Sgl/Dbf Face Red Letters White Housing, 120/277V
CXTEU2RW-RC	COMBO LED Exit/Emerg. Light Sgl/Dbf Red Letters, white housing, w/Remote Capability, 120/277v



## ADJUSTABLE OPTICS LED EMERGENCY UNIT

ITEM NO.	DESCRIPTION
LEDR2	LED Emergency Light, White, 120/277
LEDR2B	LED Emergency Light, Black, 120/277

## SEMI-RECESSED MR-16 EMERGENCY UNIT

ITEM NO.	DESCRIPTION
RMR16	2 Lamp Emergency Fixture, White Housing, 120/277V, Ultra bright MR-16 lamps
RMR16LED	2 Lamp Emergency Fixture, White Housing, 120/277V, High Output 3.3w LED lamps



## THIN ALL LED THERMOPLASTIC EXIT & EMERGENCY COMBO

ITEM NO.	DESCRIPTION
CTXTEU3R	Injection-moded with a thin sleek 1-5/8" profile



## WET LOCATION SEMIRECESSED MR-16 EMERGENCY UNIT

ITEM NO.	DESCRIPTION
RMR16WP	2 Lamp, Weatherproof Emergency Fixture, Gray Housing, 120/277V, Ultra bright MR-16 lamps
RMR16WPLED	2 Lamp, Weatherproof Emergency Fixture, Gray Housing, 120/277V, High Output 3.3w LED lamps

## LOW PROFILE ALL LED EXIT & EMERGENCY COMBO

ITEM NO.	DESCRIPTION
CEU3RW	Low Profile All LED Exit & Emergency Combo, Red, White Housing
CEU3GW	Low Profile All LED Exit & Emergency Combo, Green, White Housing
CEU3RWRC	1-15/16" low profile Injection-moded exit sign



## DECORATIVE OUTDOOR LED AC/EMERGENCY UNIT

ITEM NO.	DESCRIPTION
DBELACEMHLBRSDTPC	Outdoor teardrop LED Die Cast , AC and EM operation, High lumen output, SDT (standard), includes photo cell, Bronze
DBELACEMHLBRSDTCWPC	Outdoor teardrop LED Die Cast , AC and EM operation, High lumen output, SDT (standard), includes photo cell, Cold Weather, Bronze

# Savegreen Lamps

LED T8 and T5 lamps are fast becoming one of the best options to enjoy the benefits of LED. Savegreen Lamps are manufactured to strict specifications providing the highest quality, consistency, performance and life. Higher efficiencies, lumens per watt, higher output options, more product options and industry leading warranty options, makes it a great choice to light your next job.



## PREMIUM BYPASS SINGLE ENDED (10 YEAR WARRANTY AND HIGHER LUMEN/WATT)

SAVEGREEN ITEM NO.	DESCRIPTION	Savegreen Inside Short Code*	WAR
L10T8BGC48L12W1750L40K	Premium Singled Ended Bypass T8 Lamp Plastic Coated Glass 48 Inch 12W 1750 Lumens 4000K 10 Yr	SGP12W40	10 Yrs
L10T8BGC48L15W2000L40K	Premium Singled Ended Bypass T8 Lamp Plastic Coated Glass 48 Inch 15W 2000 Lumens 4000K 10 Yr	SGP15W40	10 Yrs
L10T8BGC48L18W2500L40K	Premium Singled Ended Bypass T8 Lamp Plastic Coated Glass 48 Inch 18W 2500 Lumens 4000K 10 Yr	SGP18W40	10 Yrs

## HIGH OUTPUT BYPASS SINGLE ENDED (3500 LUMENS PER LAMP)

SAVEGREEN ITEM NO.	DESCRIPTION	Savegreen Inside Short Code*	WAR
LT8BGC48L26W3500L40K	High Output Singled Ended Bypass T8 Lamp Plastic Coated Glass 48 Inch 26W 3500 Lumens 4000K	SGH26W40	5 Yrs

## BYPASS DOUBLE ENDED OR SINGLE ENDED (EASY RETROFIT OPTION)

SAVEGREEN ITEM NO.	DESCRIPTION	Savegreen Inside Short Code*	WAR
LT8BDGC48L18W2100L40K	Double & Singled Ended Bypass T8 Lamps Plastic Coated Glass 48 Inch 18W 2100 Lumens 4000K	SGD18W40	5 Yrs
L10T8BDGC48L12W1750L40K	Premium Double & Singled Ended Bypass T8 Lamps Plastic Coated Glass 48 Inch 12W 1750 Lumens 4000K	SGPD12W40	10 Yrs
L10T8BDGC48L18W2500L40K	Premium Double & Singled Ended Bypass T8 Lamps Plastic Coated Glass 48 Inch 18W 2500 Lumens 4000K	SGPD18W40	10 Yrs

\*Add Savegreen Inside Short Code to any X1LED fixture in lieu of "LN" or "LI" and change price of complete fixture by the "Add/Deduct" columns per lamp.

## DUAL TYPE A OR TYPE B - MAGIC (WORK WITH OR WITHOUT BALLAST)

SAVEGREEN ITEM NO.	DESCRIPTION	Savegreen Inside Short Code*	WAR
LT8ABP48L18W2250L40K	Type A & B Plastic T8 Lamp Singled Ended 48 Inch 18W 2250 Lumens 4000K	SGM18W40K	5 Yrs
LT8ABP48L15W1875L40K	Type A & B Plastic T8 Lamp Singled Ended 48 Inch 15W 1875 Lumens 4000K	SGM15W40K	5 Yrs
LT8ABP24L15W1875L40K	Type A & B Plastic T8 Lamp Singled Ended 24 Inch 15W 1875 Lumens 4000K	SGM215W40K	5 Yrs

## T5HO BYPASS SINGLE ENDED (3300 LUMENS WITH DARK SPOT ON ONE END)

SAVEGREEN ITEM NO.	DESCRIPTION	Savegreen Inside Short Code*	WAR
LT5BG46L25W3300L40K	Frosted Glass T5HO Single Ended Bypass T5 Lamp 46 Inch 25W 3300 Lumens 4000K	SGT525W40	5 Yrs

## POPULAR BYPASS SINGLE ENDED (MOST COST EFFECTIVE LAMP)

SAVEGREEN ITEM NO.	DESCRIPTION	Savegreen Inside Short Code*	WAR
LT8BG48L15W1740L40K	Frosted Glass Single Ended Bypass T8 Lamp 48 Inch 15W 1740 Lumens 4000K	SGB15W40	5 Yrs

## STANDARD BYPASS SINGLE ENDED (AVAILABLE IN 24,36 AND 48 INCHES)

SAVEGREEN ITEM NO.	DESCRIPTION	Savegreen Inside Short Code*	WAR
LT8BGC24L9W1050L40K	Plastic Coated Glass Single Ended Bypass T8 Lamp 24 Inch 9W 1050 Lumens 4000K	SGS29W40	5 Yrs
LT8BGC36L12W1200L40K	Plastic Coated Glass Single Ended Bypass T8 Lamp 36 Inch 12W 1200 Lumens 4000K	SGS312W40	5 Yrs
LT8BGC48L15W1740L40K	Plastic Coated Glass Single Ended Bypass T8 Lamp 48 Inch 15W 1740 Lumens 4000K	SGS15W40	5 Yrs




# Icon Legend

<b>EM1</b>	Integrated 10 Watt( <b>EM</b> ) or 12 Watt( <b>EM12</b> ), External 20 Watt( <b>EM20</b> ), 90 mins Battery Backup
<b>EM2</b>	Integrated 10 Watt( <b>EM</b> ), External 12 Watt( <b>EM12</b> ) or 20 Watt( <b>EM20</b> ), 90 mins Battery Backup
<b>EM3</b>	External Battery Backup
<b>EM4</b>	Integrated 10 Watt( <b>EM</b> ) or 12 Watt( <b>EM12</b> ) (excludes 1x4 or less than 4ft), External 20 Watt( <b>EM20</b> ), 90 mins Battery Backup
<b>EM5</b>	Integrated 10 Watt( <b>EM</b> ) or 12 Watt( <b>EM12</b> ) (excludes 2x2 or less than 4ft), External 20 Watt( <b>EM20</b> ), 90 mins Battery Backup
<b>EM6</b>	Integrated 10 Watt( <b>EM</b> ) (excludes 1x4 or less than 4ft), External 12 Watt( <b>EM12</b> ) or 20 Watt( <b>EM20</b> ), 90 mins Battery Backup
<b>EM7</b>	Integrated 10 Watt( <b>EM</b> ) (excludes 2x2 or less than 4ft), External 12( <b>EM12</b> ) or 20 Watt( <b>EM20</b> ), 90 mins Battery Backup
<b>EM8</b>	Integrated 5 Watt Inverter ( <b>INV5</b> ), 12 Watt Inverter( <b>INV12</b> ) 90 mins Battery Backup or 12 Watt( <b>EMKT12</b> ), 90 mins Battery Backup, 1200 lumens LED array (excludes 2x2 or less than 4ft)
<b>EM9</b>	Integrated 5 Watt Inverter ( <b>INV5</b> ) or 12 Watt ( <b>EMKT12</b> ) 90 mins Battery Backup, 1200 lumens LED array (excludes 2x2 or less than 4ft)
<b>EM10</b>	Integrated 12 Watt( <b>EMKT12</b> ), 90 mins Battery Backup, 1200 lumens LED array
<b>G120</b>	ELV/Triac dimming at 120V only (Change <b>DMV</b> to <b>G120</b> )
<b>OS1</b>	<b>SS</b> -On/Off Sensor, <b>SV</b> -Bi-level Sensor, <b>SD</b> -Daylight Harvesting Sensor, <b>SM</b> -Microwave Sensor
<b>OS2</b>	<b>SS</b> -On/Off Sensor, <b>SV</b> -Bi-level Sensor, <b>SD</b> -Daylight Harvesting Sensor
<b>OS3</b>	<b>SM</b> -Microwave Sensor only
<b>OS4</b>	<b>SS</b> -On/Off Sensor for stairwell
<b>OS5</b>	<b>SS</b> -On/Off Sensor for stairwell and <b>SM</b> -Microwave Sensor only
<b>OS6</b>	<b>MDT4</b> -On/Off Sensor for indoor highbay
<b>D1MV</b>	0-10V, Dim to 1%, 120V-277V (Change <b>DMV</b> to <b>D1MV</b> )

<b>90CRI</b>	90CRI, 2700K, 3000K, 3500K, 4000K, 5000K
<b>CCT1</b>	3000K, 3500K, 4000K, 5000K
<b>CCT2</b>	3500K, 4000K, 5000K
<b>CCT3</b>	3000K, 3500K, 4000K
<b>CCT4</b>	3000K, 4000K
<b>CCT5</b>	3500K, 4000K
<b>CCT6</b>	4000K, 5000K (Consult factory for 3000K)
<b>RGBW</b>	Color Changing
<b>WET</b>	Wet Location
<b>SURF</b>	Surface Mount (some may require shroud) (See index for page number)
<b>REC</b>	Recessed Mount (See index for page number)
<b>PEND</b>	Pendant Mount (See index for page number)
<b>WALL</b>	Wall Mount (See index for page number)
<b>AIR RET</b>	Air Return
<b>X1LED</b>	X1 LED Series T8 or T5
<b>X1LEDT5</b>	X1 LED Series LED T5 Lamp only
<b>X1LEDT8D</b>	X1 LED Series T8 Dimming
<b>FLUOR</b>	Fluorescent T8 or T5 (Consult factory for ordering info)
<b>FLUORT5</b>	Fluorescent T5 Lamp only (Consult factory for ordering info)

# Finishes

While white is standard, Saylite offers a variety of finishes, including any RAL finish. From classic colors to unique woodgrain finishes, Saylite can make an eye catching display of your lighting. Can we match your company color? Contact us for info!

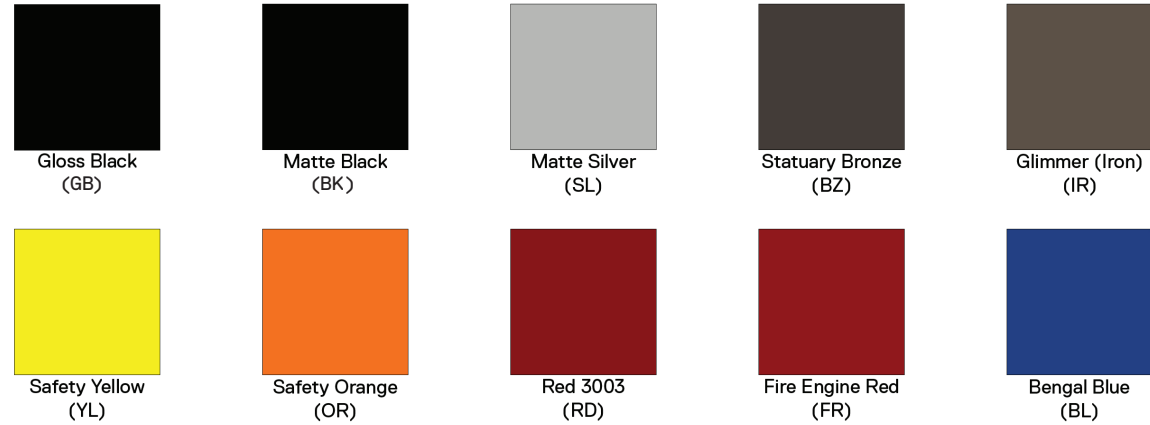

Consult factory for other finishes.

# Sensors



External Sensor					
Sensor Code	Lens Code	Lens Option	Sensor Description	Part Number*	Supplier
MDT	1	Isle Lens	On/Off	OSFLAITW	Leviton
				HBP112L7EM1OEM	Watt Stopper
MDD	3	Low Mount Lens	Daylight Harvesting	HB011BDX	Leviton
MDF	4	High Mount Lens	Photocell	HBP112L7EM1OEM	Watt Stopper
MDB			Bi Level (xx)	LSXR610HL(xx)	Sensor Switch



Internal Sensor			
Sensor Code	Sensor Description	Part Number*	Supplier
SS	On/Off	SFR30J180	Sensor Switch
SD	Daylight Harvesting	SNS200	Philips
SV	Bi Level (xx)	SFD7ADCWH(xx)	Sensor Switch
SM	Microwave	OSM3DV1W	Leviton
		SSTMS2B	Interglobal

\*Saylite may change to similar specification versions.

# Index

Series	Page #	Series	Page #	Series	Page #	Series	Page #
44.....	6,10,19,21,44,55,60	DCC.....	81	LWD.....	79	TDL.....	73
45.....	19,44,55	DCL.....	80	MAX.....	28	TEN.....	84
66.....	7,10,20,21,56,60	DFUCLL.....	66	MDF.....	82	TFC.....	71
131.....	13,16	MTIM.....	59	MWP.....	79	THL.....	61
153.....	47,52	AC.....	59	OSL.....	78	UCLL.....	12,16
200.....	49,51	DSK.....	73	OUT.....	79	UDLL.....	13,16
207.....	49,51	ECL.....	50,51	PFF.....	82	W4A.....	48
209.....	49,51	ELXT.....	87	PLEL.....	87	WLEZ.....	87
215.....	57	EOS.....	69	PLIN.....	10	WLL.....	24
555.....	57,60	EWP.....	48	PLY23.....	38,39,40,41	WMD.....	84
22C.....	67,68	EZR.....	86	PLY44.....	42,43		
24C.....	67,68	EZXT.....	86	PMF.....	83		
4RB.....	67,68	F13.....	79	PRL.....	9		
8RB.....	67,68	FHB.....	26,65	PRO.....	78		
PI.....	85	FL.....	50	PUF.....	50,51		
AWP.....	80	FSF.....	30,33	RCR.....	72		
BFP.....	14	GSR.....	31	RDX.....	29		
BOL.....	84	H6L.....	65	RFS.....	67		
C.....	31,34,35	HB131.....	63	RHB.....	63		
CB6.....	53	HBC.....	62,65	RKD.....	30		
CBF.....	12	HC.....	85	RLK.....	68		
CEU.....	88	HOTBD.....	59	RMR.....	89		
CIND.....	32	HOTCD.....	70,71	RRS.....	32		
CIR.....	71	HOTCE.....	71	S.....	34,35		
CIT.....	64,77	ICF.....	15	SBC.....	45		
CITA.....	64,76,77	IND.....	32,35	SBX.....	14		
CITE.....	74,75	IRCR.....	73	SDF.....	82		
CITN.....	75	JSR.....	31	SER.....	30		
CITOL.....	77	KDS.....	34,35	SES.....	10		
CITP.....	75	KZXT.....	87	SHFPELP..	47		
CLF.....	8	L10.....	91	SHUCLL....	46,52		
CLLLBF....	22	L23.....	5,18,54	SHUDLL....	52		
CLLLSF....	23,44	L23H.....	37	SKB.....	69		
CLLLSG....	23	L34.....	5,19	SKD.....	33		
CLT.....	12	LCH.....	37	SLP.....	25,47,57		
CPR.....	63	LDF.....	82	SMC.....	72		
CPY.....	78	LEDC.....	88	SMHOTCD	71		
CTXT.....	88	LEDR.....	89	SOH.....	33		
CUR.....	13	LPLIN.....	25	SPS.....	84		
CV800.....	78	LSSL.....	48	SS213.....	58,60		
CWLL.....	24	LT5.....	91	SSSGB....	63		
CXTE.....	88	LT8.....	90,91	STW.....	53,58		
DBEL.....	89	LTX.....	21	SWP.....	79		
DC056.....	81	LUC.....	59	T5050.....	59,84		
DC120.....	81	LVS.....	26	TB.....	84		
DC150.....	81						





**Lighting** done right.

**Dallas**

2055 Luna Rd., Ste. 142  
Carrollton, TX 75006  
972-247-3171  
Fax: 972-247-0200

**Houston**

4205 Pinemont Dr.  
Houston, TX 77018  
713-686-5899  
Fax: 713-686-5899

Scan to Call Us



[sales@saylite.com](mailto:sales@saylite.com)